

# Unlock more when you connect.

*GE Profile Connect +* delivers features and updates that improve appliances over time via WiFi.

PG. 4







Hands-free  
Autofill

No-Preheat  
Air Fry

Twin Turbo  
Dry Boost™

Appliances shown: French-Door refrigerator—PVD28BYNFS (pg. 24);  
Slide-in gas range—PGS960YPFS (pg. 120); Over-the-range microwave  
oven—PVM9179SKSS (pg. 142); Dishwasher—PDT785SYNFS (pg. 156)



A smarter kitchen


### Who will love it

Our products are designed to make life simpler for those who:

- Crave smart home technology and cutting-edge features in every appliance
- Are passionate about finding ways to do things better or make things easier
- Expect technology to help them achieve more every day
- Are never satisfied with the status quo



# Unlock more when you connect.

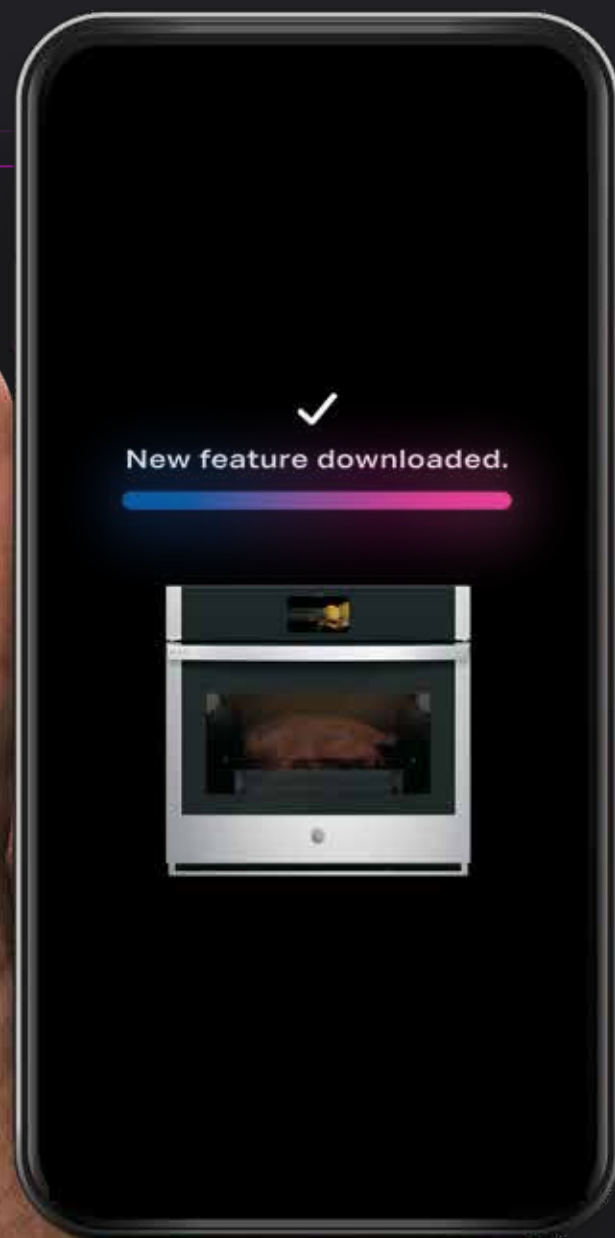

## This is smarter innovation.

- Continuously get more benefits long after you purchase your appliance thanks to GE Profile Connect + software updates.
- Get the latest features—like No Preheat Air Fry Mode and Turkey Mode—that keep getting better over time
- Monitor and control connected appliances remotely via the SmartHQ™ app.
- Improve cooking, cleaning and food storage capabilities and performance for years to come.



## This is smarter innovation for future home buyers.

GE Profile™ is the ideal partner for home builders who want smart homes.

- GE Appliances voted #1 Most-Used Appliance Brand among builders for kitchens and laundry.\*
- Fast and reliable delivery to over 90% of the U.S.
- National factory service with highly skilled technicians



SCAN TO  
PARTNER  
WITH US.



\*2006-2020 Builder Brand Use Study, 2019-2020 Home Builder Executive Brand Analysis.





Appliances shown: French-Door refrigerator—GFE28GMKES (pg. 25); Double wall oven—JTD5000ENES (pg. 72); 30" gas cooktop—JGP5030SLSS (pg. 99); Dishwasher—GDT665SMNES (pg. 157)

### WHO WILL LOVE IT

Our products are designed, built and tested for real life, which makes them perfect for owners who:

- Demand a durable kitchen that stands up to years of use
- Prefer a modern twist on traditional appliances
- Appreciate time-tested features that get the job done





# MAKING LIFE EASIER

When you use the SmartHQ™ app, you can easily access the latest features and simplify your day-to-day life. Now you'll save time and reduce stress by monitoring laundry, starting family meals or washing after-dinner dishes right from your phone.



## PARTNERING WITH BUILDERS TO MAKE HAPPY HOMES

### Stay in the know

Get a status alert that your dishes are done.



Get the latest features to help you tackle everyday household tasks and keep your routine running smoothly.



#### Multitask with ease

Use your voice to tell your oven to set a timer when your hands are too messy.



#### Enjoy peace of mind

Always have detergent by reordering automatically with Amazon Dash Replenishment.



#### Maximize your time

Preheat your oven from your phone when you're on the way home from the grocery store.



#### Keep getting better

Over-the-air updates improve your smart appliances and simplify your life.

At GE Appliances, we have been dedicated to serving builders and their home buyers for over 60 years. You need quality products with long-lasting performance, and that's exactly what we build.

# #1

We have consecutively been the #1 choice by builders for kitchen appliances and laundry for 10 years.

\*2006-2020 Builder Brand Use Study, 2019-2020 Home Builder Executive Brand Analysis

### WHY YOU SHOULD PARTNER WITH US



A nationwide builder-focused sales and support team.



Dedicated factory-trained servicers.



Delivery to over 90% of the US population.



GE APPLIANCES

Discover the benefits of partnering with us at [GEAppliances.com/pro](https://GEAppliances.com/pro)





# THE TRUE LEADER IN PREMIUM FINISHES

When it comes to fingerprint resistant premium finishes, GE Appliances is an industry leader with more choices for more owners.

Finishes are available across all kitchen products.





# NOW, YOU CAN MANAGE MORE WITH LESS.

SmartHQ™ Pro from GE Appliances makes it easy for owners to manage multifamily, hospitality, and assisted living properties from any location.



## GET TWO POWERFUL SOFTWARE SOLUTIONS IN ONE.

### Proactive Operations



Control appliances and monitor efficiency.



Connect to over 600 smart appliances.

### Precision Service



Retrieve data for enhanced service and diagnostics.



Update appliances, order parts and view service history.

Visit [SmartHQsolutions.com/SmartHQ-Pro](https://SmartHQsolutions.com/SmartHQ-Pro) to learn more and schedule a demo.

## TABLE OF CONTENTS

	Page	Specifications & Installation
<b>REFRIGERATION</b>		
French-Door & Bottom-Freezer Refrigerators	14-29	298-303
Side-By-Side Refrigerators	30-37	304-307
Top-Freezer Refrigerators	38-47	308-312
Water Filters	48-50	394-396
Refrigeration Parts & Accessories	51	
Compact Refrigerators, Wine & Beverage Centers	52-57	313-314
Ice Makers	55	314
Freezers	58-63	315
<b>COOKING</b>		
Wall Ovens	68-79	316-325
Warming Drawers	79	326
Advantium®	80-81	327
Built-In Microwave Ovens	82-83	328-331
Cooktops	84-101	332-337
Ventilation	102-111	338-344
Drop-In Ranges	112-113	345-346
Slide-In Ranges	114-123	347-350
Free-Standing Electric Ranges	124-131	351-355
Free-Standing Gas Ranges	132-139	356-359
Over-The-Range Microwave Ovens	140-145	360-363
	81, 83, 93, 100, 109-111, 122-123, 130-131, 138-139, 145	
Cooking Parts & Accessories		
Countertop Microwave Ovens	146-149	364-365
<b>DISHWASHERS</b>		
Built-In Dishwashers	154-161	366-372
Spacemaker® Built-In Dishwashers	162	372
Portable Dishwashers & Compactors	163	373-375
Disposers	164-165	375
Dishwasher & Compactor Parts & Accessories	166-167	
<b>CLOTHES CARE</b>		
Front Load Washers & Dryers	172-177	376-381
Top Load Washers & Dryers	178-183	382-385
Stackable/Portable Washers/Dryers	184	386
Unitized Washers/Dryers	185	387
Clothes Care Parts & Accessories	186-191	
Dryer Exhausting & Installation Information		388-389
<b>PACKAGE OPTIONS</b>		
GE Free-Standing Package Options	194-201	
Profile™ Free-Standing Package Options	202-209	
GE Built-In Package Options	210-219	
Profile Built-In Package Options	220-229	
GE Clothes Care Package Options	230-235	
<b>WATER SYSTEMS</b>		
RealMAX™ Series Water Heaters	238-243	392
Electric Point-of-Use Tank-Style	244-245	391
Electric Water Heaters	246-249	390
Flexible Capacity Electronic Water Heaters	250-251	391
Tankless Water Heaters	252-255	393
GeoSpring™ Solar Water Heaters	256-259	393
Softening Systems & Filtration Systems	260-265	394-396
<b>CONSUMER COMFORT PRODUCTS</b>		
Window Room Air Conditioners	268-275	397-398
Portable Room Air Conditioners	276-277	399
Dehumidifiers	278-279	399
Zoneline® UltimateV10™ Vertical Air Conditioners	280-283	402
Zoneline Packaged Terminal Air Conditioners	284-287	403-406
26" Built-In Wall Air Conditioners	288-289	400-401
24" Universal Fit Wall Air Conditioners	290-291	400
Zoneline Parts & Accessories, Thermostats	283, 287	
<b>PRODUCT SPECIFICATIONS &amp; INSTALLATIONS</b>		
Cleaning Supplies and Accessories	292-293	
Warranty Information	294-296	
ADA Requirements/UFAS Standards	297	
Nomenclatures	407-409	



GE Appliances helps you conserve energy and save money. We have been an ENERGY STAR® Partner since 2001. We are committed to creating energy-efficient, high-performance household appliances.

As an ENERGY STAR partner, GE Appliances has determined that the appliances marked with the ENERGY STAR logo meet the ENERGY STAR guidelines for energy efficiency.

Before purchasing an ENERGY STAR certified appliance, read important information about its estimated annual energy consumption or energy-efficiency rating available from your retailer, [geappliances.com](https://geappliances.com) or [energystar.gov](https://energystar.gov).



Compliant with the Americans with Disabilities Act



Compliant with the Uniform Federal Accessibility Standards



**®** Chef Connect—For instant convenience, choose when to automatically sync clocks and the range elements with the microwave's or hood's surface light and vent.

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.*



Appliances with built-in WiFi powered by SmartHQ™ offer remote monitoring and enhanced features are indicated by this icon.



This mark indicates that a product has voice assistance capabilities.



Appliances with this icon are Made in America and contain 70 to 90% U.S. content. Product content details at [GEAppliances.com/USA](https://GEAppliances.com/USA).



GE Appliances and the SmartHQ app use industry-best practices for IoT cybersecurity and consumer data protection.





REFRIGERATION



# OPEN THE DOOR TO OPTIONS

Whether it's the bold technology inside GE Profile™ or the unwavering durability of a GE Appliances model, limitless combinations of features and styles give every owner a refrigerator that's theirs.



PYD22KYNFS—See pg. 20.



PVD28BYNFS—See pg. 24.



PSB42YSNSS—See pg. 37.



GSS25GYPFS—See pg. 35.



GTS17DTNRWW—See pg. 47.



GLE12HSPSS—See pg. 29.



GNE25JMKES—See pg. 27.



FUF17DLRWW—See pg. 60.



GWS04HAESS—See pg. 57.



FCM16DLWW—See pg. 62.



# FRENCH-DOOR & BOTTOM-FREEZER REFRIGERATORS

## FEATURE HIGHLIGHTS



### KEURIG® K-CUP® BREWING SYSTEM

Enjoy the unexpected convenience of hot, single-serve brewing at your fridge.



### HANDS-FREE AUTOFILL

Walk away without worrying as the dispenser automatically fills your container with filtered water.



### FINGERPRINT RESISTANT STAINLESS

Easily wipe away smudges and fingerprints for a look that's always sparkling clean.



### SPACE-SAVING ICEMAKER

Have more usable storage space thanks to an icemaker with integrated bins, located on the door.



### HOT WATER SCHEDULING VIA SmartHQ™

Have hot water waiting for you any time of day. Just schedule hot water through SmartHQ, and enjoy ultimate convenience.



### ADJUSTABLE-TEMP DRAWER WITH BIN CADDY

Enjoy more storage flexibility and better organization with a removable bin caddy that's perfect for storing canned drinks and more.



### DOOR IN DOOR

Easily store and access your favorites, including taller items like wine bottles, with an innovative Door in Door design and convenient rotating bin.



### TWINCHILL™ EVAPORATORS

Keep foods fresh with separate climates in the fresh-food and freezer sections that help maintain temperature and humidity levels.



### FULL-WIDTH, ELECTRONIC TEMP-CONTROLLED DRAWER

Maintain the optimal temperatures for your favorite foods with three accurate settings.



FRENCH-DOOR, COUNTER-DEPTH REFRIGERATORS



- PYE22PYN**  
**GE PROFILE™ 22.1 CU. FT. SMART REFRIGERATOR**
- **Keurig® K-Cup® brewing system**
  - **Hot Water Scheduling via SmarthQ™**
  - Full-width, electronic temperature-controlled drawer with LED lights
  - Advanced water filtration uses RPWFE replacement filter
  - TwinChill™ evaporators
  - Showcase LED lighting
  - Quick Space shelf
  - Built-In WiFi powered by SmarthQ
  - Drop-down tray
  - Turbo Cool and Turbo Freeze settings

■ Fingerprint Resistant Stainless – PYE22ZPYNFS



Model shown in Slate

- PYE22KMK**  
**GE PROFILE 22.1 CU. FT. SMART REFRIGERATOR**
- **Hands-free Autofill**
  - Full-width, electronic temperature-controlled drawer with LED lights
  - Second icemaker option (IM5D kit sold separately)
  - TwinChill evaporators
  - Showcase LED lighting
  - Quick Space shelf
  - WiFi optional\*
  - Drop-down tray
  - Turbo Cool and Turbo Freeze settings
  - Advanced water filtration uses RPWFE replacement filter

■ Fingerprint Resistant Stainless – PYE22KYNFS  
■ Black Stainless – PYE22KBLTS  
■ Slate – PYE22KMKES  
■ Black Slate – PYE22KELDS



- PYD22KYN**  
**GE PROFILE 22.1 CU. FT. SMART REFRIGERATOR**
- **Door in Door**
  - Hands-free Autofill
  - Full-width, electronic temperature-controlled drawer with LED lights
  - Second icemaker option (IM5D kit sold separately)
  - TwinChill evaporators
  - Advanced water filtration uses RPWFE replacement filter
  - Showcase LED lighting
  - Quick Space shelf
  - WiFi optional\*
  - Drop-down tray

■ Fingerprint Resistant Stainless – PYD22KYNFS



Model shown in Slate

- PWE23KMK**  
**GE PROFILE™ 23.1 CU. FT. SMART REFRIGERATOR**
- **Internal water dispenser**
  - Factory-installed icemaker
  - **Full-width, electronic temperature-controlled drawer with LED lights**
  - TwinChill evaporators
  - In-the-door controls with actual-temperature display
  - **Drop-down tray**
  - Advanced water filtration uses RPWFE replacement filter
  - Showcase LED lighting
  - **Quick Space shelf**
  - WiFi optional\*
  - Turbo Cool and Turbo Freeze settings

■ Fingerprint Resistant Stainless – PWE23KYNFS  
■ Slate – PWE23KMKES  
■ Black Slate – PWE23KELDS



Complete features and specifications on pages 298–303.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*SmarthQ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.



FRENCH-DOOR, COUNTER-DEPTH REFRIGERATORS



- GYE22GYN**  
**GE 22.1 CU. FT. SMART REFRIGERATOR**
- Space-saving icemaker
  - Second icemaker option (IM5D kit sold separately)
  - Advanced water filtration uses RPWFE replacement filter
  - Showcase LED lighting
  - TwinChill evaporators
  - WiFi optional\*
  - 2 humidity-controlled drawers and full-width drawer with LED light

■ Fingerprint Resistant Stainless – GYE22GYNFS  
■ Slate – GYE22GMNES  
■ Black Slate – GYE22GENDS



- GYE18JYL**  
**GE 17.5 CU. FT. SMART REFRIGERATOR**
- Fits 33" openings
  - **External ice and water dispenser with temperature display**
  - LED lighting
  - 2 humidity-controlled drawers and 1 full-width, adjustable-temperature drawer
  - Turbo Cool setting
  - Quick Space shelf
  - WiFi optional\*
  - Advanced water filtration uses XWFE replacement filter

■ Fingerprint Resistant Stainless – GYE18JYLFS  
■ Slate – GYE18JMLSES



- GWE23GYN**  
**GE 23.1 CU. FT. SMART REFRIGERATOR**
- TwinChill evaporators
  - Showcase LED lighting
  - 2 humidity-controlled drawers and full-width drawer with LED light
  - Factory-installed icemaker with water filtration system
  - Advanced water filtration uses RPWFE replacement filter
  - WiFi optional\*

■ Fingerprint Resistant Stainless – GWE23GYNFS  
■ Slate – GWE23GMNES  
■ Black Slate – GWE23GENDS



- GWE19JYL**  
**GE 18.6 CU. FT. SMART REFRIGERATOR**
- Fits 33" openings
  - **Internal water dispenser**
  - Factory-installed icemaker with water filtration system
  - LED lighting
  - 2 humidity-controlled drawers and 1 full-width, adjustable-temperature drawer
  - Turbo Cool setting
  - Quick Space shelf
  - WiFi optional\*
  - Door alarm
  - Upfront temperature controls with actual-temperature display
  - Advanced water filtration uses XWFE replacement filter

■ Fingerprint Resistant Stainless – GWE19JYLFS  
■ Slate – GWE19JMLSES  
■ High-gloss White – GWE19JGLWW  
■ High-gloss Black – GWE19JGLBB



Complete features and specifications on pages 298–303.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*SmarthQ Connect Module is required and sold separately. It is available for order on [geappliances.com](http://geappliances.com), part number PBX23W00Y0.



FRENCH-DOOR REFRIGERATORS



**PVD28BYN**  
**GE PROFILE™ 27.9 CU. FT. SMART REFRIGERATOR**

- Hands-free Autofill
- LED light wall
- Adjustable-temperature drawer with bin caddy
- Door in Door
- Soft-close drawers
- Built-in WiFi powered by SmarthQ™
- TwinChill™ evaporators

■ Fingerprint Resistant Stainless - PVD28BYNFS



**PFE28KYN**  
**GE PROFILE 27.7 CU. FT. SMART REFRIGERATOR**

- Hands-free Autofill
- Full-width, electronic temperature-controlled drawer with LED lights
- Second icemaker option (IM5D kit sold separately)
- TwinChill evaporators
- Showcase LED lighting
- Quick Space shelf
- WiFi optional\*
- Drop-down tray
- Turbo Cool and Turbo Freeze settings
- Advanced water filtration uses RPWFE replacement filter

■ Fingerprint Resistant Stainless - PFE28KYNFS  
■ Black Stainless - PFE28KBLTS  
■ Slate - PFE28KMKEs



**PFE28PYN**  
**GE PROFILE 27.7 CU. FT. SMART REFRIGERATOR**

- Keurig® K-Cup® brewing system
- Hot Water Scheduling via SmarthQ
- Full-width, electronic temperature-controlled drawer with LED lights
- Advanced water filtration uses RPWFE replacement filter
- TwinChill evaporators
- Showcase LED lighting
- Quick Space shelf
- Built-In WiFi powered by SmarthQ
- Drop-down tray
- Turbo Cool and Turbo Freeze settings

■ Fingerprint Resistant Stainless - PFE28PYNFS



Model shown in Black Slate

**GFE28GEL**  
**GE 27.7 CU. FT. SMART REFRIGERATOR**

- Space-saving icemaker
- Second icemaker option (IM5D kit sold separately)
- Advanced water filtration uses RPWFE replacement filter
- Showcase LED lighting
- TwinChill evaporators
- 2 humidity-controlled drawers and full-width drawer with LED light
- WiFi optional\*

■ Fingerprint Resistant Stainless - GFE28GYNFS  
■ Slate - GFE28GMKEs  
■ Black Slate - GFE28GELDS



**PFD28KBL**  
**GE PROFILE 27.7 CU. FT. SMART REFRIGERATOR**

- Door in Door
- Hands-free Autofill
- Full-width, electronic temperature-controlled drawer with LED lights
- Second icemaker option (IM5D kit sold separately)
- TwinChill evaporators
- Showcase LED lighting
- Quick Space shelf
- WiFi optional\*
- Drop-down tray
- Turbo Cool and Turbo Freeze settings
- Advanced water filtration uses RPWFE replacement filter

■ Fingerprint Resistant Stainless - PFD28KYNFS



**GFE26JYM**  
**GE 25.6 CU. FT. SMART REFRIGERATOR**

- Space-saving icemaker
- LED lighting
- External controls with temperature set display, child lock and door alarm
- Spillproof shelves
- 2 humidity-controlled drawers and full-width drawer
- Quick Space shelf
- WiFi optional\*

■ Fingerprint Resistant Stainless - GFE26JYMFS  
■ Slate - GFE26JMMES  
■ Black Slate - GFE26JEMDS  
■ White - GFE26JGMWW  
■ Black - GFE26JGMBB



Complete features and specifications on pages 298-303.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*SmarthQ™ Connect Module is required and sold separately. It is available for order on [geappliances.com](http://geappliances.com), part number PBX23W00Y0.



FRENCH-DOOR REFRIGERATORS



Model shown in Slate



GNE29GMK

GE 27.8 CU. FT. REFRIGERATOR

- TwinChill™ evaporators
- Showcase LED lighting
- 2 humidity-controlled drawers and full-width drawer
- Factory-installed icemaker with water filtration system
- Advanced water filtration uses RPWFE replacement filter
- **Internal controls with actual-temperature display**
- Door alarm
- Two-level freezer storage baskets
- WiFi optional\*

■ Fingerprint Resistant Stainless – GNE29GYNFS  
■ Slate – GNE29GMKES



Model shown in Slate



GNE25JMK

GE 24.7 CU. FT. SMART REFRIGERATOR

- Fits 33" openings
- **Internal water dispenser**
- LED lighting
- Factory-installed icemaker
- 2 humidity-controlled drawers and 1 full-width, adjustable-temperature drawer
- Turbo Cool setting
- **Quick Space shelf**
- WiFi optional\*
- Door alarm
- Advanced water filtration uses XWFE replacement filter

■ Fingerprint Resistant Stainless – GNE25JYKFS  
■ Slate – GNE25JMKES  
■ High-gloss White – GNE25JGKWW  
■ High-gloss Black – GNE25JGKBB



GNE27JYM

GE 27.0 CU. FT. REFRIGERATOR

- **Internal water dispenser**
- Factory-installed icemaker with water filtration system
- LED lighting
- Spillproof shelves
- **2 humidity-controlled drawers and full-width drawer**
- Quick Space shelf
- WiFi optional\*

■ Fingerprint Resistant Stainless – GNE27JYMFS  
■ Slate – GNE27JMMES  
■ White – GNE27JGMWW  
■ Black – GNE27JGMBB



GNE21FYK

GE 20.8 CU. FT. SMART REFRIGERATOR

- Fits 30" openings
- LED lighting
- **2 humidity-controlled drawers and 1 full-width, adjustable-temperature drawer**
- Factory-installed icemaker
- Advanced water filtration uses XWFE replacement filter
- Turbo Cool setting
- WiFi optional\*
- Door alarm
- Upfront temperature controls with actual-temperature display

■ Fingerprint Resistant Stainless – GNE21FYKFS



GFE24JYK

GE 23.7 CU. FT. SMART REFRIGERATOR

- Fits 33" openings
- **External ice and water dispenser with temperature display**
- LED lighting
- 2 humidity-controlled drawers and 1 full-width, adjustable-temperature drawer
- Advanced water filtration uses XWFE replacement filter
- Turbo Cool setting
- Quick Space shelf
- WiFi optional\*
- Door alarm

■ Fingerprint Resistant Stainless – GFE24JYKFS  
■ Slate – GFE24JMKES



Complete features and specifications on pages 298–303.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*SmartHQ™ Connect Module is required and sold separately. It is available for order on [geappliances.com](http://geappliances.com), part number PBX23W00Y0.



BOTTOM-FREEZER REFRIGERATORS



**GDE25EYK**  
**GE 24.8 CU. FT. SMART REFRIGERATOR**

- Fits 33" openings
- LED lighting
- **Sliding snack drawer**
- **Factory-installed icemaker**
- **Advanced water filtration uses XWFE replacement filter**
- 2 humidity-controlled drawers

- **Turbo Cool setting**
- **Door alarm**
- WiFi optional\*
- **Upfront temperature controls with actual-temperature display**

■ Fingerprint Resistant Stainless – GDE25EYKFS



**GBE21DGK**  
**GE 21.0 CU. FT. REFRIGERATOR**

- Fits 30" openings
- LED lighting
- Equipped for optional icemaker
- WiFi optional\*
- Adjustable glass shelves
- 2 clear drawers

■ Fingerprint Resistant Stainless – GBE21DYKFS



**GDE21EYK**  
**GE 21.0 CU. FT. REFRIGERATOR**

- Fits 30" openings
- LED lighting
- Sliding snack drawer
- Factory-installed icemaker
- Advanced water filtration uses XWFE replacement filter
- 2 humidity-controlled drawers
- Door alarm
- WiFi optional\*
- Upfront temperature controls with actual-temperature display
- Turbo Cool setting

■ Fingerprint Resistant Stainless – GDE21EYKFS



BOTTOM-FREEZER, COUNTER-DEPTH REFRIGERATOR



**GLE12HSP**  
**GE 11.9 CU. FT. REFRIGERATOR**

- Fits 24" openings
- Temp Zone crisper
- Equipped for optional icemaker (IM4D)
- LED lighting
- Interior electronic touch controls
- Bottle storage rack
- Sabbath mode capable

■ Stainless – GLE12HSPSS



Complete features and specifications on pages 298–303.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*SmartHQ™ Connect Module is required and sold separately. It is available for order on [geappliances.com](http://geappliances.com), part number PBX23W00Y0.



# SIDE-BY-SIDE REFRIGERATORS

## FEATURE HIGHLIGHTS



### SHOWCASE LED LIGHTING

Easily find even the smallest items thanks to 7 flush-mounted LED lights, which shed more crisp, even light throughout the interior without wasting space.



### ARCTICA ICEMAKER

Fresh, filtered ice is within reach thanks to a cutting-edge Arctica icemaker and innovative easy-access door.



### FINGERPRINT RESISTANT STAINLESS

Easily wipe away smudges and fingerprints for a look that's always sparkling clean.



### CLEAR DOOR SHELVES

Adjustable, see-through door shelves provide flexible storage options for even large containers, and free up valuable space inside the refrigerator.



### QUICK ICE SETTING

This refrigerator's icemaker features a cutting-edge Quick Ice setting which creates ice up to 50% faster than normal settings.



### QUICK SPACE SHELF

Find the ideal place for everything in your refrigerator—even hard-to-fit tall items—thanks to a clever Quick Space shelf, which easily slides back to create more space.



### TURBO COOL SETTING

Quickly bring down the interior refrigerator temperature thanks to an innovative Turbo Cool setting, which circulates an extra boost of cold air throughout the interior when selected.



### EDGE-TO-EDGE SHELVES

Store more of your favorite items and enjoy organizational flexibility on every level with glass shelves that extend from wall to wall.



### SLIDE-OUT FREEZER BASKETS

Freeze larger items easily with an accessible slide-out freezer baskets that provides additional storage options.



COUNTER-DEPTH SIDE-BY-SIDE REFRIGERATORS



**PZS22MYK**  
**GE PROFILE™ 21.9 CU. FT. REFRIGERATOR**

- Showcase LED lighting
- Turbo Cool setting
- Quick Ice setting
- Quick Space shelf
- Interior storage drawers
- Adjustable glass shelves
- Easy-access icemaker

■ Fingerprint Resistant Stainless – PZS22MYKFS



**GZS22DSJ**  
**GE 21.8 CU. FT. REFRIGERATOR**

- LED lighting
- Integrated shelf support system
- Adjustable slide-out, spillproof glass shelves
- Adjustable clear door bins
- Fresh-food multi-level drawers
- Glass freezer shelves
- Advanced water filtration uses XWFE replacement filter

■ Stainless – GZS22DSJSS  
■ Slate – GZS22DMJES  
■ White – GZS22DGJWW  
■ Black – GZS22DGJBB



Model shown in Slate



**GZS22IMN**  
**GE 21.8 CU. FT. REFRIGERATOR**

- Showcase LED lighting
- Edge-to-edge shelves
- Hidden hinges
- Interior storage drawers
- Glass freezer shelves
- Clear door shelves
- External dispenser
- Easy-access icemaker

■ Fingerprint Resistant Stainless – GZS22IYNFS  
■ Slate – GZS22IMNES



Complete features and specifications on pages 305-306.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.



SIDE-BY-SIDE REFRIGERATORS



PSE25KYH  
GE PROFILE™ 25.3 CU. FT. REFRIGERATOR

- Showcase LED lighting
- Turbo Cool setting
- Quick Ice setting
- Quick Space shelf
- Interior storage drawers
- Adjustable glass shelves
- Arctica icemaker
- External dispenser
- Electronic display

Fingerprint Resistant Stainless – PSE25KYHFS



GSE25GYP  
GE 25.3 CU. FT. REFRIGERATOR

- LED lighting
- Edge-to-edge shelves
- Clear door shelves
- Interior storage drawers
- External dispenser
- Easy-access icemaker
- Advanced water filtration

Fingerprint Resistant Stainless – GSE25GYDFS  
High-gloss White – GSE25GGPWW  
High-gloss Black – GSE25GGPBB



NON-ENERGY STAR® MODELS

Fingerprint Resistant Stainless – GSS25GYDFS  
Slate – GSS25GMPES  
High-gloss White – GSS25GGPWW  
High-gloss Black – GSS25GGPBB  
Bisque – GSS25GGPCC



Model shown in Slate

GSS25IEN  
GE 25.1 CU. FT. REFRIGERATOR

- Showcase LED lighting
- Edge-to-edge shelves
- Hidden hinges
- Interior storage drawers
- Glass freezer shelves
- Clear door shelves
- External dispenser
- Easy-access icemaker
- Advanced water filtration

Fingerprint Resistant Stainless – GSS25IYNFS  
Slate – GSS25IMNES



GSE23GYP  
GE 23.2 CU. FT. REFRIGERATOR

- 33-inch-wide refrigerator
- LED lighting
- Edge-to-edge shelves
- Clear door shelves
- Interior storage drawers
- External dispenser
- Easy-access icemaker
- Advanced water filtration

Fingerprint Resistant Stainless – GSE23GYDFS  
White – GSE25GGPWW  
Black – GSE25GGPBB



NON-ENERGY STAR® MODELS

Fingerprint Resistant Stainless – GSS23GYDFS  
Slate – GSS23GMPES  
White – GSS23GGPWW  
Black – GSS23GGPBB  
Bisque – GSS23GGPCC



Complete features and specifications on pages 303-307.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.





# BUILT-IN SIDE-BY-SIDE REFRIGERATORS

## FEATURE HIGHLIGHTS



### LED LIGHTING

Illuminates the fresh-food and freezer compartments, vegetable drawer and climate-controlled drawers to spotlight food without compromising space.



### INTEGRATED DISPENSER WITH LED LIGHTING

Precise settings take the guesswork out of adjusting your refrigerator.



### CLIMATE-CONTROLLED DRAWER

Alter your drawer's internal temperature to suit the food inside, using one of three temperature settings: Meat, Produce or Citrus.

## BUILT-IN SIDE-BY-SIDE REFRIGERATORS



- PSB48YSN**  
**GE PROFILE™ 28.7 CU. FT. SMART REFRIGERATOR**
- 48" built-in configuration
  - Integrated dispenser with LED lighting
  - LED lighting
  - Climate-controlled drawer
  - Built-In WiFi powered by SmartHQ™
  - Fresh-food multi-level drawers
  - Adjustable spillproof glass shelves
  - Large door bins
- Stainless - PSB48YSNSS



- PSB42YSN**  
**GE PROFILE 24.5 CU. FT. SMART REFRIGERATOR**
- 42" built-in configuration
  - Integrated dispenser with LED lighting
  - LED lighting
  - Climate-controlled drawer
  - Built-In WiFi powered by Smart HQ
  - Fresh-food multi-level drawers
  - Adjustable spillproof glass shelves
  - Large door bins
- Stainless - PSB42YSNSS



Complete features and specifications on pages 303-307.  
See page 297 for Accessibility Requirements.  
For definitions of logos, see page 13.





# TOP-FREEZER REFRIGERATORS

## FEATURE HIGHLIGHTS



### #1 IN QUALITY AND DEPENDABILITY\*

Among 16-22 cu. ft. refrigerators based on an independent study of property maintenance personnel.



### LED LIGHTING

Spotlights foods inside, making them easy to see.



### PREMIUM INNER DOOR

Enjoy greater flexibility and organizational options right on the door with modular door bins.



### GARAGE-READY

Our 19 and 22 cu. ft. Top-Freezers with Dual Controls are proven to perform at room temperatures ranging between 38°F to 110° F.



### ADJUSTABLE GLASS FREEZER SHELF

Enjoy a high-end appearance with secure storage for a variety of items.



### GLOSS FINISH

Make your kitchen shine with a polished finish that stands out in any setting.



### MADE IN AMERICA

70 to 90% U.S. Content



### SLIDING DELI BIN

Enjoy greater flexibility in your fridge and easily create more space for tall items with an innovative drawer that can be positioned wherever you prefer.



### EDGE-TO-EDGE GLASS SHELVES

Enjoy a polished look and easy-access cleaning with edge-to-edge glass shelves that extend the full width of the refrigerator.



TOP-FREEZER REFRIGERATORS



Model shown in White

GTS22KGN  
GE 21.9 CU. FT. REFRIGERATOR

- Fits 33" openings
  - #1 in Quality and Dependability\*
  - **Garage-ready\*\***
  - Premium inner door
  - LED lighting
  - Edge-to-edge glass shelves
  - Adjustable glass freezer shelf
  - High-gloss finish
  - Upfront temperature controls
- Fingerprint Resistant Stainless – GTS22KYNFS  
■ Slate – GTS22KMNRES  
■ Black Slate – GTS22KMNRDS  
■ White – GTS22KGNRWW  
■ Black – GTS22KGNRBB



Model shown in Slate

GIE22JMN  
GE 21.9 CU. FT. REFRIGERATOR

- Fits 33" openings
  - #1 in Quality and Dependability\*
  - Premium inner door
  - LED lighting
  - Edge-to-edge glass shelves
  - Sliding deli drawer
  - Adjustable wire freezer shelf
  - Factory-installed icemaker
  - Upfront temperature controls
- Slate – GIE22JMNRES



Model shown in White

GIE21GTH  
GE 21.1 CU. FT. REFRIGERATOR

- Fits 33" openings
  - #1 in Quality and Dependability\*
  - Upfront temperature controls
  - Adjustable spill-resistant glass shelves
  - Snack drawer
  - Adjustable-humidity drawers
  - Factory-installed icemaker
  - Wire freezer shelf
  - Spillproof freezer floor
- Stainless – GIE21GSHSS  
■ White – GIE21GTHWW  
■ Black – GIE21GTHBB



GTE21GSH  
GE 21.1 CU. FT. REFRIGERATOR

- Fits 33" openings
  - #1 in Quality and Dependability\*
  - Upfront temperature controls
  - Adjustable spill-resistant glass shelves
  - Snack drawer
  - Adjustable-humidity drawers
  - Large door bins
  - Wire freezer shelf
  - Spillproof freezer floor
- Stainless – GTE21GSHSS  
■ White – GTE21GTHWW  
■ Bisque – GTE21GTHCC  
■ Black – GTE21GTHBB



Complete features and specifications on pages 303, 308-311.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*Among 14–18 cu. ft. refrigerators based on an independent study of property maintenance personnel. Source: The Stevenson Company, 2020—Market research company with over 20 years of experience in the appliance industry.  
\*\*Tested to perform in room temps ranging between 38° F to 110° F.



TOP-FREEZER REFRIGERATORS



VOTED #1\*

**GTS19KGN**  
**GE 19.1 CU. FT. REFRIGERATOR**

- Fits 30" openings
- #1 in Quality and Dependability\*
- **Garage-ready\*\***
- Premium inner door
- LED lighting

- Edge-to-edge glass shelves
- Adjustable glass freezer shelf
- High-gloss finish
- Upfront temperature controls

■ Fingerprint Resistant Stainless – GTS19KYNFS  
■ Slate – GTS19KMNRES  
■ White – GTS19KGNRWW  
■ Black – GTS19KGNRBB

Model shown in White



VOTED #1\*

**GIE19JSN**  
**GE 19.1 CU. FT. REFRIGERATOR**

- Fits 30" openings
- #1 in Quality and Dependability\*
- Premium inner door
- LED lighting

- Edge-to-edge glass shelves
- Sliding deli drawer
- Adjustable wire freezer shelf
- Factory-installed icemaker

■ Stainless – GIE19JSNRSS



VOTED #1\*

**GTE19DTN**  
**GE 19.1 CU. FT. REFRIGERATOR**

- Fits 30" openings
- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves

- Upfront temperature controls
- High-gloss handles
- **Premium inner door**

■ White – GTE19DTNRWW  
■ Black – GTE19DTNRBB

Model shown in White

Complete features and specifications on pages 303, 308-311.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*Among 14–18 cu. ft. refrigerators based on an independent study of property maintenance personnel. Source: The Stevenson Company, 2020—Market research company with over 20 years of experience in the appliance industry.



VOTED #1\*

**GTS18HGN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- **Gloss finish**
- LED lighting

- **Glass freezer shelf**
- Sliding deli drawer
- Edge-to-edge glass shelves

■ Fingerprint Resistant Stainless – GTS18HYNFS  
■ Slate – GTS18HMNRES  
■ High-gloss White – GTS18HGNRWW  
■ High-gloss Black – GTS18HGNRBB

Model shown in White



VOTED #1\*

**GIE18GTN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Edge-to-edge glass shelves
- Sliding deli drawer

- Adjustable wire freezer shelf
- Upfront temperature controls
- Factory-installed icemaker

■ Stainless – GIE18GSNRSS  
■ Silver – GIE18GCNRS  
■ White – GIE18GTNRWW  
■ Black – GIE18GTNRBB

Model shown in White



VOTED #1\*

**GTE18GSN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Edge-to-edge glass shelves

- Sliding deli drawer
- Adjustable wire freezer shelf
- Upfront temperature controls

■ Stainless – GTE18GSNRSS  
■ Slate – GTE18GMNRES  
■ White – GTE18GTNRWW  
■ Bisque – GTE18GTNRCC  
■ Black – GTE18GTNRBB



TOP-FREEZER REFRIGERATORS





VOTED #1\*

**GTS18GTN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- **Edge-to-edge glass shelves**
- **Sliding deli drawer**
- Adjustable wire freezer shelf
- Upfront temperature controls

■ Stainless – GTS18GSNRSS  
■ White – GTS18GTNRWW  
■ Black – GTS18GTNRBB



Model shown in White





VOTED #1\*

**GIE18DTN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves
- **Factory-installed icemaker**

■ White – GIE18DTNRWW  
■ Black – GIE18DTNRBB



Model shown in White





VOTED #1\*

**GTE18DCN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves
- Upfront temperature controls
- High-gloss handles

■ Silver – GTE18DCNRSA  
■ White – GTE18DTNRWW  
■ Black – GTE18DTNRBB



Complete features and specifications on pages 303, 308-311.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*Among 14-18 cu. ft. refrigerators based on an independent study of property maintenance personnel. Source: The Stevenson Company, 2020—Market research company with over 20 years of experience in the appliance industry.





VOTED #1\*

**GTS18DTN**  
**GE 17.5 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves
- Upfront temperature controls
- High-gloss handles

■ White – GTS18DTNRWW  
■ Black – GTS18DTNRBB



Model shown in White





VOTED #1\*

**GIE17GSN**  
**GE 16.6 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Sliding deli drawer
- Edge-to-edge glass shelves
- Adjustable wire freezer shelf
- Factory-installed icemaker

■ Stainless – GIE17GSNRSS







VOTED #1\*

**GTE17GSN**  
**GE 16.6 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Sliding deli drawer
- Edge-to-edge glass shelves
- Adjustable wire freezer shelf
- Upfront temperature controls

■ Stainless – GTE17GSNRSS  
■ White – GTE17GTNRWW  
■ Black – GTE17GTNRBB





TOP-FREEZER REFRIGERATORS



Model shown in White

**GTS17GTN**  
**GE 16.6 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- **Sliding deli drawer**
- **Edge-to-edge glass shelves**
- Adjustable wire freezer shelf
- Upfront temperature controls

■ Stainless – GTS17GSNRSS  
□ White – GTS17GTNRWW



Model shown in White

**GPE17CTN**  
**GE 16.6 CU. FT. RECESSED-HANDLE REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Pocket handles
- Adjustable wire shelves

□ White – GPE17CTNRWW



Model shown in White

**GTE17DTN**  
**GE 16.6 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves
- Upfront temperature controls
- High-gloss handles

□ White – GTE17DTNRWW  
■ Bisque – GTE17DTNRCC  
■ Black – GTE17DTNRBB



Complete features and specifications on pages 303, 308-311.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*Among 14-18 cu. ft. refrigerators based on an independent study of property maintenance personnel. Source: The Stevenson Company, 2020—Market research company with over 20 years of experience in the appliance industry.



Model shown in White

**GTS17DTN**  
**GE 16.6 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves
- Upfront temperature controls
- High-gloss handles

□ White – GTS17DTNRWW  
■ Black – GTS17DTNRBB



Model shown in White

**GTE16DTN**  
**GE 15.6 CU. FT. REFRIGERATOR**

- #1 in Quality and Dependability\*
- LED lighting
- Adjustable wire shelves
- Upfront temperature controls
- High-gloss handles

□ White – GTE16DTNRWW (Right-hand door swing)  
□ White – GTE16DTNLWW (Left-hand door swing)  
■ Bisque – GTE16DTNRCC



**NON-ENERGY STAR® MODEL**  
□ White – GTS16DTNRWW



**GPE12FSK**  
**GE 11.6 CU. FT. REFRIGERATOR**

- Fits 24" openings
- Equipped for optional icemaker
- LED lighting in fresh-food section
- Upfront electronic temperature controls
- 3 glass fresh-food shelves

■ Stainless – GPE12FSKSB  
□ White – GPE12FGKWW  
■ Black – GPE12FGKBB- 2 clear freezer door bins
- 2 clear crisper drawers
- Wire freezer step-shelf
- Gallon door storage





REFRIGERATOR WATER FILTERS



RPWFE  
PREMIUM REPLACEMENT  
FILTER

- GE Appliances' most advanced filtration ever—industry-first filter to reduce Chloramine and Chlorine taste and odor for improved taste
- LeakDetect technology—filter communicates with refrigerator if leak is detected. Water is shut off to refrigerator with consumer notification on display
- GE guaranteed fit—Designed and tested specifically for use in select GE French-Door refrigerators\*\*\*
- Tested and verified to reduce 8 trace pharmaceuticals, including ibuprofen, progesterone, atenolol, trimethoprim and fluoxetine\*
- IAPMO certified to filter impurities such as PFOA/PFOS, BPA, cysts, lead, mercury, asbestos and select pesticides, chemicals and 50 other impurities
- PFOA/PFOS reduction reduces 99% of Perfluorooctanoic acid (PFOA) and Perfluorooctaine Sulfonate (PFOS)
- Rated Capacity: 170 gallons or 6 months\*\*



XWFE  
PREMIUM REPLACEMENT  
FILTER

- GE Appliances' most advanced filtration ever—filters Chloramine and Chlorine taste and odor for improved taste
- LeakDetect technology—filter communicates with refrigerator if leak is detected. Water is shut off to refrigerator with consumer notification on display
- GE guaranteed fit—Designed and tested specifically for use in select side-by-side and bottom-freezer refrigerators\*\*\*
- Tested and verified to reduce 8 pharmaceuticals, including ibuprofen, progesterone, atenolol, trimethoprim and fluoxetine\*
- IAPMO certified to filter impurities such as PFOA/PFOS, BPA, cysts, lead, mercury, asbestos and select pesticides, chemicals and 50 other impurities
- PFOA/PFOS reduction reduces 99% of Perfluorooctanoic acid (PFOA) and Perfluorooctaine Sulfonate (PFOS)
- Rated Capacity: 170 gallons or 6 months\*\*
- XWFE replaces XWF. Compatible with all refrigerators using XWF



MWFP  
PREMIUM REPLACEMENT  
FILTER

- GE guaranteed fit—Designed and tested specifically for use in select side-by-side and bottom-freezer refrigerators\*\*\*
- Tested and verified to reduce 8 trace pharmaceuticals, including ibuprofen, progesterone, atenolol, trimethoprim and fluoxetine\*
- IAPMO certified to filter impurities such as PFOA/PFOS, BPA, cysts, lead, mercury, asbestos and select pesticides
- PFOA/PFOS reduction reduces 99% of Perfluorooctanoic acid (PFOA) and Perfluorooctaine Sulfonate (PFOS)
- Rated Capacity: 300 gallons or 6 months\*\*



MSWF  
REPLACEMENT FILTER

- GE guaranteed fit—Compatible with select GE side-by-side and bottom-freezer refrigerators\*\*\*
- IAPMO certified to filter impurities such as lead, mercury, asbestos and select pesticides and chemicals
- IAPMO certified for structural performance and to filter chlorine taste and odor and particulates
- Rated Capacity: 300 gallons or 6 months\*\*



GSWF  
REPLACEMENT FILTER

- GE guaranteed fit—Designed and engineered specifically for use in select GE top-freezer and bottom-freezer refrigerators\*\*\*
- IAPMO certified to filter impurities such as cysts, lead and select pesticides and chemicals
- IAPMO certified for structural performance and to filter chlorine taste and odor and particulates
- Rated Capacity: 750 gallons or 6 months\*\*



AFPWF  
AUTOFILL PITCHER  
WATER FILTER

- GE guaranteed fit—Compatible with select GE refrigerators with Autofill Pitchers
- IAPMO certified to filter chlorine taste and odor and particulates
- Rated Capacity: 170 gallons or 6 months\*\*

GE filters are certified by IAPMO for contaminant reduction and structural performance. GE filters are proven to filter impurities from drinking water.

Certified by IAPMO to reduce†	RPWFE	XWFE	MWFP	MSWF	GSWF	AFPWF
Chlorine Taste and Odor	✓	✓	✓	✓	✓	✓
Chloramine	✓	✓				
PFOA/PFOS	✓	✓	✓			
Lead, Mercury	✓	✓	✓	✓	✓	
Cysts††	✓	✓	✓	✓	✓	
Particulate Chemicals (Benzene, p-Dichlorobenzene)	✓	✓	✓	✓		
Herbicides (Atrazine, 2, 4-D), Pesticide (Carbofuran)	✓	✓	✓	✓	Atrazine only	
Insecticides (Lindane, Toxaphene)	✓	✓	✓	✓	Lindane only	
Select Natural Deposits (Asbestos)	✓	✓	✓	✓		
Volatile Organic Compounds	✓	✓	✓			
Select Pharmaceuticals	✓	✓	✓			

†See performance data sheet for impurities reduction information by model. Not all filters reduce all impurities listed.  
††Based on the use of Cryptosporidium parvum cysts.

\*The substances reduced by this filter are not necessarily in your water.  
\*\*Cartridge should be replaced every 6 months at a rated capacity, or sooner if a noticeable reduction in flow rate occurs.  
\*\*\*See your owner's manual or chart section of the catalog for the correct filter for your refrigerator. GE has not qualified non-GE-branded filters for use in GE refrigerators and there is no assurance that non-GE-branded filters meet GE's standards for quality, performance and reliability. IAPMO certified.

LEARN MORE OR ORDER GE WATER FILTERS BY CALLING 800-851-6200.



TOP-FREEZER FILTRATION SYSTEMS

PRODUCTS BELOW AVAILABLE ONLY THROUGH PARTS ACCOUNT UNLESS NOTED.



- GXRLQK**  
**GE EXTERIOR REFRIGERATOR/ ICEMAKER FILTRATION SYSTEM**
- Reduces lead, select pharmaceuticals, select VOCs, cysts, chlorine taste and odor and other contaminants
  - **Filter installs directly to refrigerator water line for refrigerators without built-in filtration**
  - 6-month filter life/150 gallons (varies with local water conditions)
  - Twist and lock design - Provides for easy, tool-free, no-mess filter replacement
  - **No water shutoff or tools needed to replace filters**
  - Replacement filter: FQK1K

PREMIUM

ADVANCED

BASIC



- GXRTDR**  
**GE EXTERIOR REFRIGERATOR/ ICEMAKER FILTRATION SYSTEM**
- Filter installs directly to refrigerator water line for refrigerators without built-in filtration
  - 6-month filter life/2,500 gallons (varies with local water conditions)
  - Water must be shut off to replace system

PREMIUM

ADVANCED

BASIC



- GXRTL**  
**IN-LINE TOP-FREEZER REPLACEMENT FILTER**
- Filter installs directly to refrigerator water line for refrigerators without built-in filtration
  - 5-year filter life - Filter should be replaced every 5 years or 5,250 gallons for best filtration results (varies with local water conditions)
  - Water must be shut off to replace system

PREMIUM

ADVANCED

BASIC

REFRIGERATION PARTS & ACCESSORIES



IM6D
GE ICEMAKER KIT
<ul style="list-style-type: none"><li>• Quickly install a new or replacement IM6 icemaker unit with an all-inclusive kit</li><li>• Includes ice bucket, fill tube, water inlet valve, installation materials and hardware</li><li>• Complete icemaker kit that will fit most GE refrigerators</li></ul>



IM4D
GE ICEMAKER
<ul style="list-style-type: none"><li>• For use in most top-freezer refrigerators and some bottom-freezer refrigerators, please check the label on the back of your refrigerator to ensure compatibility</li></ul>



IM5D
GE ICEMAKER KIT
<ul style="list-style-type: none"><li>• For use in select French-Door bottom-freezer refrigerators</li><li>• Quickly install a second icemaker in freezer section with an all-inclusive kit</li></ul>



PM08X10008
UNIVERSAL BRAIDED PEX WATER LINE
<ul style="list-style-type: none"><li>• 8' length for easily accessible installation</li><li>• PEX inner tube for improved ice and water taste</li><li>• Non-corrosive coating</li><li>• 1/4" inlet and outlet fittings</li><li>• NSF certified (National Sanitation Foundation)</li></ul>



WX08X10006—8' LENGTH
UNIVERSAL PEX WATER LINE
<ul style="list-style-type: none"><li>• Constructed of cross-linked reinforced polyethylene for greater durability</li><li>• Flexible material resists kinking</li><li>• Eliminates pitting and cracking for lasting performance</li><li>• NSF certified</li><li>• No need for solder or torch for installation</li></ul> <p><b>WX08X10002</b>—2' length <b>WX08X10015</b>—15' length <b>WX08X10025</b>—25' length</p>

**SMARTCONNECT™ REFRIGERATOR TUBING KITS** make it easy to install a water line for icemakers and dispensers on any applicable GE Appliances refrigerator.



# COMPACT & UNDERCOUNTER REFRIGERATION

## FEATURE HIGHLIGHTS

### COMPACT REFRIGERATORS



#### ENERGY STAR® CERTIFIED

Meets or exceeds federal guidelines for energy efficiency for year-round energy and money savings.



#### GLASS SHELVES

Create convenient food storage with easy-to-clean shelves.



#### CAN RACKS


Quick and easy access to your favorite drinks.

### WINE & BEVERAGE CENTERS



#### REVERSIBLE GLASS & WOOD SHELVES

Easily flip the shelves to accommodate different beverages. Use the wooden side for wine bottles and the glass side for cans and more.



#### SHOWCASE SHELF

Angle the shelf to store wine bottles on their side or display them with the labels showing so you can quickly find the one you want.



#### DUAL ZONE TEMPERATURE CONTROL

Two distinct zones maintain any temperature between 43 and 62° F, keeping red and white wines ready to serve.

### ICE MAKERS



#### NUGGET ICE

Enhance specialty drinks, fill up water bottles more easily, and provide a base for chilled platters with nugget-style ice.



#### GOURMET CLEAR ICE

The primary flavor of a drink lasts longer when you use this ice maker's large, slow-melting, gourmet-style ice. Each distinctively clear cube has a solid, smooth texture.



#### PANEL READY

Designed for personalization with customer-supplied cabinet-compatible panel and custom handle.



COMPACT REFRIGERATORS



- GCE06G**  
**GE 5.6 CU. FT. REFRIGERATOR**
- Durability-tested compressor
  - **Built-in or freestanding capability**
  - Can rack
  - **Interior lighting**
  - **Clear crisper drawer**
  - 2 glass shelves
  - Manual defrost
  - Fresh-food door shelves
  - **2 mini ice trays**
- Stainless – GCE06GSHSB  
■ White – GCE06GGHWW  
■ Black – GCE06GGHBB



Model shown in Black

- GME04G**  
**GE 4.4 CU. FT. REFRIGERATOR**
- Durability-tested compressor
  - Can rack
  - Tall bottle door storage
  - Recessed handle
  - Manual defrost
  - **3 glass shelves**
  - Fresh-food door shelves
  - Mini ice tray
- CleanSteel™ – GME04GLKLB  
■ Black – GME04GGKBB



- GDE03G**  
**GE 3.1 CU. FT. DOUBLE-DOOR REFRIGERATOR**
- Durability-tested compressor
  - Separate freezer compartment
  - Interior lighting
  - Clear crisper drawer
  - Glass shelves
  - Built-In can rack
  - Door shelves
  - Reversible door swing
- CleanSteel – GDE03GLKLB  
■ White – GDE03GGKWW  
■ Black – GDE03GGKBB



Complete features and specifications on page 313.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

ICE MAKERS



Gourmet clear ice  
*Shown with optional custom panel*

- UCC15NJII**  
**15" GOURMET CLEAR ICE MAKER**
- Up to 48 pounds of gourmet clear ice production per day
  - Panel-ready\*
  - Large-capacity ice bin
  - Interior LED lighting
  - Clean indicator light
  - Ice scoop
  - Optional UPK3 drain pump kit
  - Built-in or freestanding capability allows for installation flexibility
  - Indoor or outdoor capability allows for flexible placement
- Stainless



Nugget ice  
*Shown with optional GE Profile™ Stainless door panel model kit PIP70SS*

- UNC15NJII**  
**15" NUGGET ICE MAKER**
- Up to 56 pounds of nugget ice production per day
  - Panel-ready\*
  - Large-capacity ice bin
  - Interior LED lighting
  - Clean indicator light
  - Ice scoop
  - Optional UPK3 drain pump kit
  - Built-in or freestanding capability allows for installation flexibility
  - Indoor or outdoor capability allows for flexible placement
- Stainless

ICEMAKER FILTRATION SYSTEMS

PRODUCTS BELOW AVAILABLE ONLY THROUGH PARTS ACCOUNT UNLESS NOTED.



- GXRLQK**  
**GE EXTERIOR REFRIGERATOR/ICEMAKER FILTRATION SYSTEM**
- Reduces lead, select pharmaceuticals, select VOCs, cysts, chlorine taste and odor and other contaminants
  - **Filter installs directly to refrigerator water line for refrigerators without built-in filtration**
  - 6-month filter life/150 gallons (varies with local water conditions)
  - Twist and lock design—Provides for easy, tool-free, no-mess filter replacement
  - **No water shutoff or tools needed to replace filters**
  - Replacement filter: FQK1K



- GXRTDR**  
**GE EXTERIOR REFRIGERATOR/ICEMAKER FILTRATION SYSTEM**
- Filter installs directly to refrigerator water line for refrigerators without built-in filtration
  - 6-month filter life/2,500 gallons (varies with local water conditions)
  - Water must be shut off to replace system

\*Sold separately, required to complete installation.



WINE & BEVERAGE CENTERS



**PWS06DSP**  
**GE PROFILE™ 4.8 CU. FT. WINE CENTER**

- Modern design with stainless handle and glass door
- Dual zone temperature controls
- 6 slide-out wine racks
- **44-bottle capacity**
- Freestanding or built-in capable
- Recessed LED lighting
- Digital temperature controls
- Door alarm

Stainless – PWS06DSPSS



**PVS06BSP**  
**GE PROFILE 5.1 CU. FT. BEVERAGE CENTER**

- Modern design with stainless handle and glass door
- **4 reversible glass and wood shelves**
- Showcase shelf
- **155-can or 52-bottle capacity**
- Freestanding or built-in capable
- Recessed LED lighting
- Digital temperature controls
- Door alarm

Stainless – PVS06BSPSS



**GWS04HAE**  
**GE 4.1 CU. FT. WINE CENTER**

- 30-bottle capacity
- Stainless steel door with large glass window
- 5 wine racks
- Upfront electronic controls
- Interior lighting
- Built-in or freestanding capability
- Door lock with key

Stainless – GWS04HAESS



**GVS04BQN**  
**GE 4.1 CU. FT. WINE & BEVERAGE CENTER**

- 125-can/31-bottle capacity
- Stainless steel door with large glass window
- 3 adjustable, full-depth and 2 half-depth wooden racks
- Upfront electronic controls
- Interior lighting
- Built-in or freestanding capability
- Door lock with key

Stainless – GVS04BQNSS



Complete features and specifications on page 312.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.





# FREEZERS

## FEATURE HIGHLIGHTS

### UPRIGHT FREEZERS



#### GARAGE-READY

Our freezers are tested to perform from 0°F to 110°F.



#### POWER OUTAGE PROMISE

In the event of a power outage, food remains frozen\* 48 hours in the freezer.



#### HIGHEST-RATED LINEUP IN THE INDUSTRY

Based on aggregated ratings and review data from GEAppliances.com and leading retail websites.



#### AUDIBLE TEMP ALARM

Always know if the door is left ajar or the internal temperature rises.



#### LED LIGHTING

Quickly find any item with bright lights that automatically illuminate upon opening.



#### LOCK WITH KEY


Enjoy peace of mind knowing valuable food items are protected.

### CHEST FREEZERS



#### GARAGE-READY

Our freezers are tested to perform from 0°F to 110°F.



#### POWER OUTAGE PROMISE

In the event of a power outage, food remains frozen\* 48 hours in the freezer.



#### HIGHEST-RATED LINEUP IN THE INDUSTRY

Based on aggregated ratings and review data from GEAppliances.com and leading retail websites.



UPRIGHT FREEZERS



- FUF21DLRWW**  
**GE 21.3 CU. FT. FROST-FREE FREEZER**

  - Garage-ready\*\*
  - Power Outage Promise\*\*\*
  - Audible temperature alarm
  - **4 glass, 2 adjustable freezer shelves**
  - Exterior electronic temperature control
- Turbo Freeze
  - LED interior lighting
  - Lock with key
  - **4 full-width clear door bins**
  - **3 clear freezer drawers**

White



- FUF21SMRWW**  
**GE 21.3 CU. FT. FROST-FREE UPRIGHT FREEZER**

  - Garage-ready\*\*
  - Power Outage Promise\*\*\*
  - Audible temperature alarm
  - 4 wire, 2 adjustable freezer shelves
  - Exterior electronic temperature control
- Turbo Freeze
  - LED interior lighting
  - Lock with key
  - 4 full-width opaque door bins
  - 1 wire freezer basket

White



- FUF17DLRWW**  
**GE 17.3 CU. FT. FROST-FREE FREEZER**

  - Garage-ready\*\*
  - Power Outage Promise\*\*\*
  - Audible temperature alarm
  - **4 glass, 2 adjustable freezer shelves**
  - Exterior electronic temperature control
- Turbo Freeze
  - LED interior lighting
  - Lock with key
  - **4 full-width clear door bins**
  - **3 clear freezer drawers**

White



- FUF17SMRWW**  
**GE 17.3 CU. FT. FROST-FREE UPRIGHT FREEZER**

  - Garage-ready\*\*
  - Power Outage Promise\*\*\*
  - Audible temperature alarm
  - 4 wire, 2 adjustable freezer shelves
  - Exterior electronic temperature control
- Turbo Freeze
  - LED interior lighting
  - Lock with key
  - 4 full-width opaque door bins
  - 1 wire freezer basket

White



- FUF14DLRWW**  
**GE 14.1 CU. FT. FROST-FREE FREEZER**

  - Garage-ready\*\*
  - Power Outage Promise\*\*\*
  - Audible temperature alarm
  - **4 glass, 2 adjustable freezer shelves**
  - Exterior electronic temperature control
- Turbo Freeze
  - LED interior lighting
  - Lock with key
  - **4 full-width clear door bins**
  - **3 clear freezer drawers**

White



- FUF14SMRWW**  
**GE 14.1 CU. FT. FROST-FREE UPRIGHT FREEZER**

  - Garage-ready\*\*
  - Power Outage Promise\*\*\*
  - Audible temperature alarm
  - 4 wire, 2 adjustable freezer shelves
  - Exterior electronic temperature control
- Turbo Freeze
  - LED interior lighting
  - Lock with key
  - 4 full-width opaque door bins
  - 1 wire freezer basket

White



Complete features and specifications on page 315.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*The highest rated upright freezer lineup in the industry—based on aggregated data from GEA.com and leading retail websites.  
\*\*GE freezers are tested to perform from 0°F to 110°F.  
\*\*\*In the event of a power outage, food remains frozen\* 48 hours in the freezer. (\*Temperature 32° F or lower.)



CHEST FREEZERS



FCM22DLWW

GE 21.7 CU. FT. MANUAL DEFROST FREEZER

- Garage-ready\*\*
- Power Outage Promise\*\*\*
- Audible temperature alarm
- Second-level rail
- LED interior lighting
- Lock with key
- Power “On” light
- **5 sliding bulk storage baskets**
- **4 customizable dividers**
- Adjustable temperature control

White



FCM16DLWW

GE 15.7 CU. FT. MANUAL DEFROST FREEZER

- Garage-ready\*\*
- Power Outage Promise\*\*\*
- **Audible temperature alarm**
- **Second-level rail**
- LED interior lighting
- Lock with key
- Power “On” light
- **4 sliding bulk storage baskets**
- Adjustable temperature control

White



FCM16SLWW

GE 15.7 CU. FT. MANUAL DEFROST FREEZER

- Garage-ready\*\*
- Power Outage Promise\*\*\*
- **Hi Temp indicator light**
- 2 sliding bulk storage baskets
- **LED interior lighting**
- Lock with key

White



FCM11SRWW

GE 10.7 CU. FT. MANUAL DEFROST FREEZER

- Garage-ready\*\*
- Power Outage Promise\*\*\*
- Hi Temp indicator light
- Power “On” light
- LED interior lighting
- Two plastic lift-out, sliding baskets

White



FCM9SRWW

GE 8.8 CU. FT. MANUAL DEFROST FREEZER

- Garage-ready\*\*
- Power Outage Promise\*\*\*
- Hi Temp indicator light
- Power “On” light
- LED interior lighting
- Two plastic lift-out, sliding baskets

White



FCM7SKWW

GE 7.0 CU. FT. MANUAL DEFROST FREEZER

- Garage-ready\*\*
- Power Outage Promise\*\*\*
- Power “On” light
- **2 lift-out, sliding bulk storage baskets**
- Adjustable temperature control
- Recessed handles
- Upfront defrost water drain
- Manual defrost

White



FCM5SKWW

GE 5.0 CU. FT. MANUAL DEFROST FREEZER

- **Garage-ready\*\***
- Power Outage Promise\*\*\*
- **Power “On” light**
- 1 lift-out, sliding bulk storage basket
- Adjustable temperature control
- Recessed handles
- Upfront defrost water drain
- Manual defrost

White

Complete features and specifications on page 315.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*\*GE freezers are tested to perform from 0°F to 110°F.  
\*\*\*In the event of a power outage, food remains frozen\* 48 hours in the freezer. (\*Temperature 32° F or lower.)





COOKING



# SPLENDID POSSIBILITIES

Cooking products from GE Appliances & GE Profile™ give homeowners total design flexibility, so they can configure their kitchen and cooking space exactly as they like.



PHP9036SJSS—See pg. 86.



PVM9005BLTS (microwave oven)—See pg. 142.  
PGS930BPTS (slide-in gas range)—See pg. 120.



PTS7000BNTS—See pg. 76.



JTD5000ENES—See pg. 72.



JVM6175SKSS (microwave oven)—See pg. 143.  
JGS760SPSS (slide-in gas range)—See pg. 121.



JES1095BMTS—See pg. 149.



UVW8301SLS (hood)—See pg. 103.  
JGP5030SLSS (cooktop)—See pg. 99.  
JTS3000SNSS (wall oven)—See pg. 77.





# WALL OVENS

## FEATURE HIGHLIGHTS



### BUILT-IN WIFI POWERED BY SmarthQ™


Connect, control and manage your oven from anywhere with your smartphone or tablet.

Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.




### UPGRADEABLE FEATURE DOWNLOADS

Ensure your oven always has the latest features, like new air fry modes, with downloadable software upgrades.



### IN-OVEN COOKCAM™

Check in without checking out thanks to an in-oven camera that allows you to check the progress of your food remotely.



### PRECISION COOKING MODES

This advanced technology prompts you with simple questions about what you're cooking, then automatically adjusts temperature and cook time for perfect results.



### NO-PREHEAT AIR FRY

Achieve crispy, never greasy, fried food results in your oven without the oil.



### DIRECT AIR CONVECTION

Precise, top-down heating technology ensures delicious results when you cook chicken, roasts and more.



### DEHYDRATE

Make homemade chips, spices and dried fruits with a high-capacity dehydrator within your oven.



### NEVER-SCRUB, HEAVY-DUTY, SMOOTH-GLIDE RACKS

Engineered to glide seamlessly out of the oven even with heavy dishes, durable Never-Scrub roller racks can remain in the oven during self-clean cycle.



### FIT GUARANTEE

Replacing a similar wall oven from GE Appliances or another brand? GE wall ovens are guaranteed for an exact fit or GE Appliances will pay up to \$300 toward modifications.

See sales associate or [geappliances.com](http://geappliances.com) for details.



BUILT-IN DOUBLE WALL OVENS



Model shown in Black Stainless



PTD9000  
GE PROFILE™ 30" SMART CONVECTION  
DOUBLE OVEN

- **In-oven CookCam™**
- No-preheat air fry
- Built-in WiFi powered by SmartHQ™\*
- Precision temperature probe
- **Dehydrate mode**
- Precision cooking
- True European Convection with Direct Air (both)
- Brilliant Touch 7" Display
- **Soft-close door**
- Never-Scrub, heavy-duty, smooth-glide roller racks (both)
- Upgradeable feature downloads

- Stainless - PTD9000SNSS
- Black Stainless - PTD9000BNTS

Recommended Pair: PHP9036 (Induction), PP7036 (Electric), PGP7036 (Gas)



PTD7000  
GE PROFILE 30" SMART CONVECTION  
DOUBLE OVEN

- **No-preheat air fry**
- **Precision cooking**
- Built-in WiFi powered by SmartHQ\*
- Precision temperature probe
- **True European Convection with Direct Air (both)**
- **Brilliant Touch 7" Display**
- **No-preheat options**
- Never-Scrub, heavy-duty, smooth-glide racks (both)
- Self-clean oven with optional Steam Clean (both)
- 10-pass hidden bake element
- **Upgradeable feature downloads**

- Stainless - PTD7000SNSS
- Black Stainless - PTD7000BNTS

Recommended Pair: PHP9036 (Induction), PP7036 (Electric), PGP7036 (Gas)



PTD700L  
GE PROFILE 30" SMART CONVECTION  
DOUBLE OVEN WITH LEFT-HAND  
SIDE-SWING DOORS

- **Swing door design**
- **Precision cooking**
- **No-preheat air fry**
- **No-preheat options**
- Built-in WiFi powered by SmartHQ\*
- **Brilliant Touch 7" Display**
- **True European Convection with Direct Air (upper)**
- Never-Scrub, heavy-duty roller racks (both)
- Precision temperature probe
- Self-clean with Steam Clean option
- **Upgradeable feature downloads**

- Stainless - PTD700LSNSS

Recommended Pair: PP7036 (Electric), PGP7036 (Gas)



PTD700R  
GE PROFILE 30" SMART CONVECTION  
DOUBLE OVEN WITH RIGHT-HAND  
SIDE-SWING DOORS

- **Swing door design**
- **Precision cooking**
- **No-preheat air fry**
- **No-preheat options**
- Built-in WiFi powered by SmartHQ\*
- **Brilliant Touch 7" Display**
- **True European Convection with Direct Air (upper)**
- Never-Scrub, heavy-duty roller racks (both)
- Precision temperature probe
- Self-clean with Steam Clean option
- **Upgradeable feature downloads**

- Stainless - PTD700RSNSS

Recommended Pair: PP7036 (Electric), PGP7036 (Gas)



\*See page 316 for WiFi-enabled features.  
Complete features and specifications on page 316.  
See page 336 for approved cooktop and wall oven combinations.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.



BUILT-IN DOUBLE WALL OVENS



Model shown in Black



- JTD5000**  
**GE 30" SMART CONVECTION DOUBLE OVEN**
- **True European Convection (upper)**
  - Built-in WiFi powered by SmartHQ™
  - **Precision temperature probe**
  - Self-clean oven with optional Steam Clean (both)
  - **Never-Scrub, heavy-duty, smooth-glide racks**
  - **Hidden backlit LCD control**
  - 10-pass hidden bake element
  - 8-pass broil element
  - Scan-to-cook
  - Voice control

- Stainless - JTD5000SNSS
- Slate - JTD5000ENES
- Black - JTD5000DNBB

Recommended Pair: JP5030 (Electric), JGP5030 (Gas)



Model shown in Slate



- JTD3000**  
**GE 30" SMART DOUBLE OVEN**
- Never-Scrub, heavy-duty racks
  - Self-clean oven with optional Steam Clean (both)
  - Built-in WiFi powered by SmartHQ
  - Scan-to-cook
  - Voice control
  - Glass touch controls
  - 10-pass hidden bake element
  - 8-pass broil element

- Stainless - JTD3000SNSS
- Slate - JTD3000ENES
- White - JTD3000DNWW

Recommended Pair: JP3030 (Electric), JGP3030 (Gas)



\*See pages 316–317 for WiFi-enabled features.  
Complete features and specifications on pages 316–317.  
See page 336 for approved cooktop and wall oven combinations.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.



- PKD7000**  
**GE PROFILE™ 27" SMART CONVECTION DOUBLE OVEN**
- **Brilliant Touch 7" LCD Control**
  - True European Convection (upper)
  - Built-in WiFi powered by SmartHQ\*
  - **Never-Scrub, heavy-duty, smooth-glide racks (both)**
  - Precision temperature probe
  - 10-pass hidden bake element
  - 8-pass broil element
  - Self-clean oven with optional Steam Clean (both)
  - **Upgradeable feature downloads**

- Stainless - PKD7000SNSS

Recommended Pair: PP7036 (Electric), PGP7036 (Gas)



- JKD5000**  
**GE 27" SMART CONVECTION DOUBLE OVEN**
- **True European Convection (upper)**
  - **Hidden backlit LCD control**
  - Never-Scrub, heavy-duty racks
  - **Precision temperature probe**
  - Self-clean oven with optional Steam Clean (both)
  - Built-in WiFi powered by SmartHQ
  - 10-pass hidden bake element
  - 8-pass broil element
  - Scan-to-cook
  - Voice control

- Stainless - JKD5000SNSS
- Slate - JKD5000ENES
- Black - JKD5000DNBB

Recommended Pair: JP5030 (Electric), JGP5030 (Gas)







BUILT-IN DOUBLE WALL OVENS



- JKD3000**  
**GE 27" SMART DOUBLE OVEN**
- Never-Scrub, heavy-duty racks (both)
  - Self-clean oven with optional Steam Clean (both)
  - Built-in WiFi powered by SmartHQ™
  - Glass touch controls
  - 10-pass hidden bake element
  - 8-pass broil element
  - Scan-to-cook
  - Voice control
- Stainless - JKD3000SNSS  
□ White - JKD3000DNWW
- Recommended Pair: JP3030 (Electric), JGP3030 (Gas)



- JRP28**  
**GE 24" DOUBLE OVEN**
- Self-clean oven (upper)
  - Electronic oven controls
  - Clear view window
  - Interior oven light
  - Two oven racks (both)
  - Multiple oven rack positions
- Stainless - JRP28SKSS  
■ Black - JRP28BJBB
- Recommended Pair: JP3030 (Electric), JGP3030 (Gas)




Complete features and specifications on pages 317-320.  
See page 336 for approved cooktop and wall oven combinations.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.


BUILT-IN COMBINATION DOUBLE WALL OVENS




- PT9800**  
**GE PROFILE™ 30" DOUBLE OVEN WITH ADVANTIUM® TECHNOLOGY**
- **Speedcook oven 120V (upper)\***
  - **Multiple cooking functions**
  - **Halogen heat (upper)**
  - **Over 175 preprogrammed menu selections (upper)**
  - True European Convection (lower)
  - Self-clean with Steam Clean option (lower)
  - Self-clean, heavy-duty roller rack (lower)
  - Glass touch controls
- Stainless - PT9800SHSS
- Recommended Pair: PP9030 (Electric), PGP9030 (Gas)



- PT7800**  
**GE PROFILE 30" DOUBLE OVEN WITH CONVECTION**
- 1.7 cu. ft. microwave capacity
  - 1,000 watts (IEC-705 test procedure)
  - Convection microwave (upper)
  - 16" turntable (upper)
  - True European Convection (lower)
  - Self-clean with Steam Clean option (lower)
  - Self-clean, heavy-duty roller rack (lower)
  - Glass touch controls
- Stainless - PT7800SHSS
- Recommended Pair: PP7030 (Electric), PGP7030 (Gas)



- PK7800**  
**GE PROFILE 27" DOUBLE OVEN**
- 1.7 cu. ft. microwave capacity
  - 1,000 watts (IEC-705 test procedure)
  - **Convection microwave (upper)**
  - 16" turntable (upper)
  - **True European Convection (lower)**
  - Self-clean with Steam Clean option (lower)
  - Self-clean, heavy-duty roller rack (lower)
  - **Glass touch controls**
- Stainless - PK7800SKSS
- Recommended Pair: PP7030 (Electric), PGP7030 (Gas)



- JT3800**  
**GE 30" DOUBLE OVEN**
- 1.7 cu. ft. microwave capacity
  - 1,000 watts (IEC-705 test procedure)
  - Sensor cooking controls (upper)
  - 16" turntable (upper)
  - Self-clean with Steam Clean option (lower)
  - Self-clean, heavy-duty oven racks (lower)
- Stainless - JT3800SHSS
- JK3800** (not shown)  
**GE 27" DOUBLE OVEN**
- Similar to the JT3800, except 27" wide.
- Stainless - JK3800SHSS
- Recommended Pair: JP3030 (Electric), JGP3030 (Gas)



\*See pages 80-81 for more about Advantium.



BUILT-IN SINGLE WALL OVENS



PTS9000  
GE PROFILE™ 30" SMART  
CONVECTION SINGLE OVEN

- **In-oven CookCam™**
- No-preheat air fry
- Built-in WiFi powered by SmartHQ™\*
- Precision temperature probe
- **Dehydrate mode**
- Precision cooking
- True European Convection with Direct Air
- Brilliant Touch 7" Display
- **Soft-close door**
- Never-Scrub, heavy-duty smooth glide roller racks
- Upgradeable feature downloads

Stainless - PTS9000SNSS  
Black Stainless - PTS9000BNTS

Recommended Pair: PHP9036 (Induction), PP7036 (Electric), PGP7036 (Gas)



Model shown in Black Stainless



PTS7000  
GE PROFILE 30" SMART  
CONVECTION SINGLE OVEN

- **No-preheat air fry**
- **Precision cooking**
- Built-in WiFi powered by SmartHQ\*
- Precision temperature probe
- **True European Convection with Direct Air**
- **Brilliant Touch 7" Display**
- **No-preheat options**
- Never-Scrub, heavy-duty, smooth-glide racks
- Self-clean oven with optional Steam Clean
- 10-pass hidden bake element

Stainless - PTS7000SNSS  
Black Stainless - PTS7000BNTS

Recommended Pair: PHP9036 (Induction), PP7036 (Electric), PGP7036 (Gas)



PTS700L  
GE PROFILE 30" SMART  
CONVECTION SINGLE  
OVEN WITH LEFT-HAND  
SIDE-SWING DOOR

- **Swing door design**
- **Precision cooking**
- **No-preheat air fry**
- **No-preheat options**
- Built-in WiFi powered by SmartHQ\*
- **Brilliant Touch 7" Display**
- **True European Convection with Direct Air**
- Never-Scrub, heavy-duty roller racks
- Precision temperature probe
- Self-clean with Steam Clean option rack
- **Upgradeable feature downloads**

Stainless - PTS700LSNSS

Recommended Pair: PP7036 (Electric), PGP7036 (Gas)



PTS700R  
GE PROFILE 30" SMART  
CONVECTION SINGLE  
OVEN WITH RIGHT-HAND  
SIDE-SWING DOOR

- **Swing door design**
- **Precision cooking**
- **No-preheat air fry**
- **No-preheat options**
- Built-in WiFi powered by SmartHQ\*
- **Brilliant Touch 7" Display**
- **True European Convection with Direct Air**
- Never-Scrub, heavy-duty roller racks
- Precision temperature probe
- Self-clean with Steam Clean option
- **Upgradeable feature downloads**

Stainless - PTS700RSNSS

Recommended Pair: PP7036 (Electric), PGP7036 (Gas)




JTS5000  
GE 30" SMART CONVECTION  
SINGLE OVEN

- **True European Convection**
- Built-in WiFi powered by SmartHQ
- **Precision temperature probe**
- Self-clean oven with optional Steam Clean
- **Never-Scrub, heavy-duty, smooth-glide racks**
- **Hidden backlit LCD control**
- 10-pass hidden bake element
- 8-pass broil element
- Scan-to-cook
- Voice control

Stainless - JTS5000SNSS  
Slate - JTS5000ENES  
Black - JTS5000DNBB

Recommended Pair: JP5030 (Electric), JGP5030 (Gas)



JTS3000  
GE 30" SMART SINGLE OVEN

- Never-Scrub, heavy-duty racks
- Self-clean oven with optional Steam Clean
- Built-in WiFi powered by SmartHQ
- Glass touch controls
- Scan-to-cook
- Voice control
- 10-pass hidden bake element
- 8-pass broil element

Stainless - JTS3000SNSS  
White - JTS3000DNWW

Recommended Pair: JP3030 (Electric), JGP3030 (Gas)



PKS7000  
GE PROFILE 27" SMART  
CONVECTION SINGLE OVEN

- **Brilliant Touch 7" Display**
- True European Convection
- Built-in WiFi powered by SmartHQ\*
- **Never-Scrub, heavy-duty, smooth-glide racks**
- Precision temperature probe
- 10-pass hidden bake element
- 8-pass broil element
- Self-clean oven with optional Steam Clean
- **Upgradeable feature downloads**

Stainless - PKS7000SNS

Recommended Pair: PP7036 (Electric), PGP7036 (Gas)



Model shown in Black



JKS5000  
GE 27" SMART CONVECTION  
SINGLE OVEN

- **True European Convection**
- **Hidden backlit LCD control**
- Never-scrub, heavy-duty, smooth-glide racks
- **Precision temperature probe**
- Never-Scrub, heavy-duty racks
- Self-clean oven with optional Steam Clean
- Built-in WiFi powered by SmartHQ
- 10-pass hidden bake element
- 8-pass broil element
- Scan-to-cook
- Voice control

Stainless - JKS5000SNSS  
Slate - JKS5000ENES  
Black - JKS5000DNBB

Recommended Pair: JP5030 (Electric), JGP5030 (Gas)



\*See pages 321 and 323 for WiFi-enabled features. Complete features and specifications on pages 321-323. See page 336 for approved cooktop and wall oven combinations. See page 297 for Accessibility Requirements.

**Bold = feature upgrade from previous model.** For definitions of logos, see page 13.




BUILT-IN SINGLE WALL OVENS



- JKS3000**  
**GE 27" SMART SINGLE OVEN**
- Never-Scrub, heavy-duty racks
  - Self-clean oven with optional Steam Clean
  - Built-in WiFi powered by SmartHQ™
  - Glass touch controls
  - 10-pass hidden bake element
  - 8-pass broil element
  - Scan-to-cook
  - Voice control
- Stainless - JKS3000SNSS  
□ White - JKS3000DNWW

Recommended Pair: JP3030 (Electric), JGP3030 (Gas)



- JRP20**  
**GE 24" ELECTRIC SINGLE OVEN**
- Self-clean oven
  - Electronic oven controls
  - Clear view window
  - Interior oven light
  - Two oven racks
- Stainless - JRP20SKSS  
□ White - JRP20WJWW  
■ Black - JRP20BJBB

**JRS06** (not shown)  
**GE 24" SINGLE OVEN**  
Similar to the JRP20, except standard-clean oven.

■ Stainless - JRS06SKSS

Recommended Pair: JP3030 (Electric), JGP3030 (Gas)



\*See page 325 for WiFi-enabled features. Complete features and specifications on pages 323-326. See page 336 for approved cooktop and wall oven combinations. See page 297 for Accessibility Requirements. **Bold = feature upgrade from previous model.** For definitions of logos, see page 13.

BUILT-IN TWIN FLEX WALL OVEN



- PTS9200**  
**GE PROFILE™ 30" SMART TWIN FLEX OVEN WITH CONVECTION**
- Two-in-one oven
  - Built-in WiFi powered by SmartHQ\*
  - 5.0 cu. ft. total oven capacity (2.8 lower; 2.2. upper)
  - True European Convection with Precise Air (lower oven)
  - Brilliant Touch 7" Display
  - Easy-glide, never-scrub rack
  - Upgradeable feature downloads
- Stainless - PTS9200SNSS

Recommended Pair: PHP9030 (Induction), PGP9030 (Gas)



BUILT-IN WARMING DRAWERS



- PTW9000**  
**GE PROFILE 30" WARMING DRAWER**
- Variable-temperature control
  - Variable-humidity control
  - Frameless drawer front
  - "On" indicator light
  - Half rack
- Stainless - PTW9000SPSS

Recommended Pair: PTS7000 (Single), PHP9036 (Induction), PGP9036 (Gas)



**PKW7000** (not shown)  
**GE PROFILE 27" WARMING DRAWER**  
Similar to PTW9000, except 27" wide.

■ Stainless - PKW7000SPSS





# BUILT-IN WALL OVENS WITH ADVANTIUM® TECHNOLOGY

## FEATURE HIGHLIGHTS



### SPEEDCOOK OVEN

Advantium cooking technology delivers oven-quality results two- to eight-times faster than a conventional oven.



### MULTIPLE COOKING FUNCTIONS

Expand your cooking versatility with True European Convection, Sensor Microwave, Broil, Warming/Proofing Oven, and Precision Cook Oven.



### 175+ PREPROGRAMMED MENU SELECTIONS

Quickly find the selection you need with a menu that organizes dishes into 12 convenient categories.

## BUILT-IN WALL OVENS WITH ADVANTIUM TECHNOLOGY



### PSB9240 GE PROFILE™ 30" SINGLE OVEN WITH ADVANTIUM TECHNOLOGY

- Speedcook oven (240V)
- Multiple cooking functions
- Halogen heat (no preheat required)
- Over 175 preprogrammed menu selections
- Custom Recipe Saver
- Allows use of UXB903SNSS storage drawer

Stainless – PSB9240SFSS



### PSB9120 GE PROFILE 30" SINGLE OVEN WITH ADVANTIUM TECHNOLOGY

- Speedcook oven (120V)
- Multiple cooking functions
- Halogen heat (no preheat required)
- Over 175 preprogrammed menu selections
- Custom Recipe Saver
- Allows use of UXB903SNSS storage drawer
- Under-the-counter installation flexibility

Stainless – PSB9120SFSS

Black Stainless – PSB9120BLTS



### PSB9100 GE PROFILE 27" SINGLE OVEN WITH ADVANTIUM TECHNOLOGY

- Speedcook oven (120V)
- Multiple cooking functions
- Halogen heat (no preheat required)
- Over 175 preprogrammed menu selections
- Custom Recipe Saver

Stainless – PSB9100SFSS

## ADVANTIUM PART & ACCESSORY

UXB903SNSS	
GE PROFILE SPEEDCOOK OVEN STORAGE DRAWER	
<ul style="list-style-type: none"><li>• Provides convenient storage of Advantium cookware when not in use</li><li>• Full-extension slides for easy access</li><li>• Allows for retrofit into previous SCB2000/1 wall oven cutout</li></ul>	
MODEL	
PSB9240	OPTIONAL UPGRADE
PSB9120	OPTIONAL UPGRADE





## FEATURE HIGHLIGHTS



### COMBINATION FAST COOK

Combines microwave and radiant heat for speed.



### STEAM COOK

Perfectly prepare your steamed favorites.



### MY CYCLE

Create a custom cook-time setting, and with one touch, cook your favorite dish just the way you like.

## BUILT-IN MICROWAVE OVENS



### PWB7030

#### GE PROFILE™ 30" BUILT-IN 1.7 CU. FT. CAPACITY MICROWAVE OVEN

- 975 watts (IEC-705 test procedure) and 1,500 convection watts
- Combination Fast Cook setting
- Steam cook
- Glass touch controls
- My Cycle
- Warming and proofing oven
- 120 volts
- Convection rack

Stainless - PWB7030SLSS



BUILT-IN CAPABLE

### PEB9159

#### GE PROFILE 1.5 CU. FT. CAPACITY CONVECTION OVEN

- 1,000 watts (IEC-705 test procedure)
- Sensor cooking controls
- Warming oven
- Optional built-in trim kit\*\* (JX9152/JX9153)
- Convection rack

Stainless - PEB9159SRSS  
Black - PEB9159DRBB



Shown with trim kit  
PEB9159SJSS



BUILT-IN CAPABLE

### PEM31

#### GE PROFILE 1.1 CU. FT. CAPACITY SPACEMAKER® OVEN

- 800 watts (IEC-705 test procedure)
- Optional built-in trim kit\*\* (JX827/JX830)
- Optional hanging kit\* (JXA019K)
- Sensor cooking controls
- Weight and time defrost
- Turntable on/off

Stainless - PEM31SFSS  
Black Stainless - PEM31BMTS  
White - PEM31DFWW  
Black - PEM31DFBB



Shown with trim kit  
PEM31SFSS



Model shown in Gray

### PEB7227

#### GE PROFILE 30" BUILT-IN 2.2 CU. FT. CAPACITY SENSOR MICROWAVE OVEN

- 1,100 watts (IEC-705 test procedure)
- Weight and time defrost
- Extra-large 16" turntable
- Instant On controls
- Control lockout
- "Add 30 seconds" button
- Kitchen timer

#### STANDARD COMBINATIONS for PEB7227

IMPORTANT: A TRIM KIT IS REQUIRED AND MUST BE ORDERED SEPARATELY.

##### STAINLESS TRIM



### PEB7227ANDD\*\*\*

Dark gray microwave with Stainless trim kit

30" KIT: JX7230SLSS  
27" KIT: JX7227SLSS

##### SLATE TRIM



### PEB7227ANDD\*\*\*

Dark gray microwave with Slate trim kit

30" KIT: JX7230ELES  
27" KIT: JX7227ELES

##### WHITE TRIM



### PEB7227DLWW

White microwave with White trim kit

30" KIT: JX7230DLWW  
27" KIT: JX7227DLWW

##### BLACK STAINLESS TRIM



### PEB7227ANDD\*\*\*

Dark gray microwave with Black Stainless trim kit

30" KIT: JX7230BLTS  
27" KIT: JX7227BLTS

##### BLACK SLATE TRIM



### PEB7227ANDD\*\*\*

Dark gray microwave with Black Slate trim kit

30" KIT: JX7230FMDS  
27" KIT: JX7227FMDS

##### BLACK TRIM



### PEB7227DLBB

Black microwave with Black trim kit

30" KIT: JX7230DLBB  
27" KIT: JX7227DLBB

\*Only applicable under ADA-compliant installation.  
\*\*Optional trim kits available in 27" and 30" configurations, sold separately. Refer to pages 328-331 for installation options and model numbers.  
\*\*\*PEB7227ANDD - Base model used with Stainless, Black Stainless, Slate and Black Slate trim kits.  
\*Optional undercabinet mounting kit sold separately. Refer to page 331 for installation options and model numbers.  
See page 297 for Accessibility Requirements.  
Complete features and specifications on pages 328-331. For definitions of logos, see page 13.





# ELECTRIC COOKTOPS

## FEATURE HIGHLIGHTS



### INDUCTION TECHNOLOGY

Rapid, precise heating with a cool-to-the-touch surface that's easy to clean.



### GLIDE TOUCH CONTROLS

Precisely control heat with one swipe.



### 11" 3,700-WATT ELEMENT

Rapidly boil water with our most powerful induction element.



### MULTI-ELEMENT TIMER

Manage up to five pans at once with individual timers for each element.



### SYNCBURNERS

Control two 7" elements simultaneously to evenly heat large cookware or griddles.



### POWER BOIL ELEMENT

Use different pan sizes on this single element that produces rapid, powerful heat.



### BACKLIT KNOBS

Achieve a modern look with the convenience of knob control.



### CONTROL LOCK CAPABILITY

Protect against unintended activation.



### FIT GUARANTEE

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications. See sales associate or [geappliances.com](http://geappliances.com) for details.



36" BUILT-IN INDUCTION COOKTOP



PHP9036

GE PROFILE™ 36" INDUCTION COOKTOP

- Five induction elements
- Digital touch controls
- 11" 3,700-watt Power Boil element
- SyncBurners
- Kitchen timer
- Control lock capability
- Pan presence & size sensor
- Red LED with black glass surface
- Hot surface indicator lights
- Stainless steel-clad aluminum griddle—optional (JXGRIDL1)

- Stainless – PHP9036SJSS
- Black – PHP9036DJBB

Recommended Pair: PTD9000 (Double), PTS9000 (Single)



30" BUILT-IN INDUCTION COOKTOP



PHP9030

GE PROFILE 30" INDUCTION COOKTOP

- Four induction elements
- Digital touch controls
- 11" 3,700-watt Power Boil element
- SyncBurners
- Kitchen timer
- Control lock capability
- Pan presence & size sensor
- Red LED with black glass surface
- Hot surface indicator lights
- Stainless steel-clad aluminum griddle—optional (JXGRIDL1)

- Stainless – PHP9030SJSS
- Black – PHP9030DJBB

Recommended Pair: PTD9000 (Double), PTS9000 (Single)



Complete features and specifications on pages 332-333.  
See page 93 for electric cooktop parts & accessories.  
See page 336 for approved cooktop and wall oven combinations.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

36" BUILT-IN ELECTRIC COOKTOPS



PP9036

GE PROFILE 36" ELECTRIC COOKTOP

- Five radiant cooking elements
- **Glide touch controls**
- 12"/9"/6" Power Boil tri-ring element
- 8"/5" Power Boil dual-ring element
- SyncBurners
- **Multi-element timer**
- Control lock capability
- **Custom settings**
- **Red LED with black glass surface**
- Stainless steel-clad aluminum griddle—optional (JXGRIDL1)

- Stainless – PP9036SJSS
- Black – PP9036DJBB (Beveled-edge glass)

Recommended Pair: PTD9000 (Double), PTS9000 (Single)



Model shown in Black



PP7036

GE PROFILE 36" ELECTRIC COOKTOP

- Five radiant cooking elements
- 12"/9"/6" Power Boil tri-ring element
- 8"/5" Power Boil dual-ring element
- **SyncBurners**
- Keep Warm setting
- Melt setting
- Control lock capability
- **Red LED backlit knobs with black glass surface**
- Hot surface indicator lights
- **Cooktop "On" indicator light**
- **Stainless steel-clad aluminum griddle—optional (JXGRIDL1)**

- Black – PP7036DJBB

Recommended Pair: PTD7000 (Double), PTS7000 (Single)





36" BUILT-IN ELECTRIC COOKTOPS (CONTINUED)



JP5036

GE 36" ELECTRIC COOKTOP

- Five radiant cooking elements
- **Digital touch controls**
- **12"/9"/6" Power Boil tri-ring element**
- **8"/5" Power Boil dual-ring element**
- **Kitchen timer**
- Keep Warm setting
- Melt setting
- Control lock capability
- **Red LED with black glass surface**
- Hot surface indicator lights

- Stainless – JP5036SJSS
- Black – JP5036DJBB

Recommended Pair: JTD5000 (Double), JTS5000 (Single)



Model shown in Black



JP3036

GE 36" ELECTRIC COOKTOP

- Five radiant cooking elements
- 12"/9" dual element
- 8"/5" Power Boil dual-ring element
- 6" fifth element warming zone
- Melt setting
- Hot surface indicator lights
- Cooktop "On" indicator light

- Stainless – JP3036SLSS
- True White – JP3036TLWW
- Black – JP3036DLBB

Recommended Pair: JTD3000 (Double), JTS3000 (Single)



Complete features and specifications on pages 332-333.  
See page 93 for electric cooktop parts & accessories.  
See page 336 for approved cooktop and wall oven combinations.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

30" BUILT-IN ELECTRIC COOKTOPS



PP9030

GE PROFILE™ 30" ELECTRIC COOKTOP

- Five radiant cooking elements
- **Glide touch controls**
- 9"/6" Power Boil dual-ring element
- 8"/5" dual-ring element
- SyncBurners
- **Multi-element timer**
- Control lock capability
- **Custom settings**
- **Red LED with black glass surface**
- Stainless steel-clad aluminum griddle—optional (JXGRIDL1)

- Stainless – PP9030SJSS
- Black – PP9030DJBB (Beveled-edge glass)

Recommended Pair: PTD9000 (Double), PTS9000 (Single)



30" BUILT-IN ELECTRIC COOKTOPS (CONTINUED)



Model shown in Black



PP7030

GE PROFILE™ 30" ELECTRIC COOKTOP

- Five radiant cooking elements
- 9"/6" Power Boil dual-ring element
- **8"/5" dual-ring element**
- SyncBurners
- Keep Warm setting
- Melt setting
- Control lock capability
- **Red LED backlit knobs with black glass surface**
- Hot surface indicator lights
- Cooktop "On" indicator light
- Stainless steel-clad aluminum griddle—optional (JXGRIDL1)

■ Black - PP7030DJBB

Recommended Pair: PTD7000 (Double), PTS7000 (Single)



JP5030

GE 30" ELECTRIC COOKTOP

- Four radiant cooking elements
- **Digital touch controls**
- 9"/6" Power Boil dual-ring element
- **SyncBurners**
- **Kitchen timer**
- Keep Warm setting
- Melt setting
- Control lock capability
- **Red LED with black glass surface**
- Hot surface indicator lights
- **Stainless steel-clad aluminum griddle—optional (JXGRIDL1)**

■ Stainless - JP5030SJSS  
■ Black - JP5030DJBB

Recommended Pair: JTD5000 (Double), JTS5000 (Single)



JP3030

GE 30" ELECTRIC COOKTOP

- Four radiant cooking elements
- Two 8" Power Boil elements
- Keep Warm setting
- Melt setting
- Hot surface indicator lights
- Cooktop "On" indicator light

■ Stainless - JP3030SJSS  
■ True White - JP3030TJWW  
■ Black - JP3030DJBB

Recommended Pair: JTD3000 (Double), JTS3000 (Single)



Complete features and specifications on page 333.  
See page 93 for electric cooktop parts & accessories.  
See page 336 for approved cooktop and wall oven combinations.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.



21" BUILT-IN ELECTRIC COOKTOP



Model shown in Black

JP3021  
GE 21" ELECTRIC COOKTOP

- Compact cooktop
- Ceramic-glass cooktop
- Ribbon heating elements
- 9"/6" dual element
- Melt setting

Black - JP3021DPBB

Recommended Pair: JRP28 (Double), JRP20 (Single)



Complete features and specifications on page 334.  
See page 93 for electric cooktop parts & accessories.  
See page 336 for approved cooktop and wall oven combinations.

ELECTRIC COOKTOPS PARTS & ACCESSORIES



	JXTR32B/W GE COOKTOP FILLER TRIM KIT	JXGRIDL1 STAINLESS STEEL-CLAD ALUMINUM GRIDDLE
MODEL		• Perfect accessory for electric ranges and cooktops with SyncBurners
PHP9036	-	OPTIONAL UPGRADE
PHP9030	OPTIONAL UPGRADE (JXTR32B)	OPTIONAL UPGRADE
PP9036	-	OPTIONAL UPGRADE
PP7036	-	OPTIONAL UPGRADE
JP5036	-	-
JP3036	-	-
PP9030	OPTIONAL UPGRADE (JXTR32B)	OPTIONAL UPGRADE
PP7030	OPTIONAL UPGRADE (JXTR32B)	OPTIONAL UPGRADE
JP5030	OPTIONAL UPGRADE (JXTR32B)	OPTIONAL UPGRADE
JP3030	OPTIONAL UPGRADE (JXTR32B/W)	-
JP3021	-	-

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM) BY USING GE PARTS ACCOUNT NUMBER.






# GAS COOKTOPS

## FEATURE HIGHLIGHTS




### TRI-RING BURNER

Three-in-one burner is designed for accelerated boiling and gentle simmering.



### EXTRA-LARGE, INTEGRATED COOKTOP GRIDDLE

Eliminate the need for extra cookware and enjoy a built-in cooking surface for pancakes, grilled cheeses and other favorites.



### HEAVY-CAST, EDGE-TO-EDGE GRATES

A large, continuous cooking surface gives you extra room for pots and pans of all sizes and lets cookware move easily from burner to burner.



### WHITE LED BACKLIT HEAVY-DUTY KNOBS

Durable knobs are backlit with white LED lighting that lends a sleek appearance and lets you know if burners are on.



### MAX BURNER SYSTEM

Delivers the same maximum BTU power to propane and natural gas cooktops.



### CONTROL LOCK CAPABILITY

Protects against unintended activation.




### 30" COOKTOP WITH 5 BURNERS

Enjoy ultimate cooktop flexibility and more cooking space with 5 sealed burners.



### SEALED COOKTOP BURNERS

Contain spills and make cleaning quick and easy.



### FIT GUARANTEE

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications.

See sales associate or [geappliances.com](http://geappliances.com) for details.



36" BUILT-IN GAS COOKTOPS



- PGP9036**  
**GE PROFILE™ 36" GAS COOKTOP**
- Heavy-cast, edge-to-edge grates
  - 18,000-BTU tri-ring burner
  - White LED backlit, heavy-duty knobs
  - **Control lock capability**
  - Precise Simmer burner
  - Sealed cooktop burners
  - Heavy-duty, dishwasher-safe grates
  - Griddle included (JXGRIDL236)
  - MAX burner system

Stainless - PGP9036SLSS


Recommended Pair: PTD9000 (Double), PTS9000 (Single)



- PGP7036**  
**GE PROFILE 36" GAS COOKTOP**
- **Heavy-cast, edge-to-edge grates**
  - **18,000-BTU Power Boil burner**
  - **White LED backlit, heavy-duty knobs**
  - Precise Simmer burner
  - Sealed cooktop burners
  - Heavy-duty, dishwasher-safe grates
  - Optional griddle (JXGRIDL236)
  - MAX burner system

Stainless - PGP7036SLSS

Recommended Pair: PTD7000 (Double), PTS7000 (Single)



- JGP5036**  
**GE 36" GAS COOKTOP**
- **Heavy-cast, edge-to-edge grates**
  - Two 15,000-BTU Power Boil burners
  - Precise Simmer burner
  - Sealed cooktop burners
  - Heavy-duty, dishwasher-safe grates
  - **Optional griddle (JXGRIDL236)**
  - MAX burner system

Stainless - JGP5036SLSS  
Black - JGP5036DLBB


Recommended Pair: JTD5000 (Double), JTS5000 (Single)



- JGP3036**  
**GE 36" GAS COOKTOP**
- 15,000-BTU Power Boil burner
  - Precise Simmer burner
  - Sealed cooktop burners
  - Heavy-duty, dishwasher-safe grates
  - Stainless steel, deep-recessed cooktop
  - MAX burner system

Stainless - JGP3036SLSS  
White - JGP3036DLWW  
Black - JGP3036DLBB

Recommended Pair: JTD3000 (Double), JTS3000 (Single)



Complete features and specifications on page 335.  
See page 100 for gas cooktop parts & accessories.  
See page 337 for approved cooktop and wall oven combinations.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

30" BUILT-IN GAS COOKTOPS



PGP9030

GE PROFILE™ 30" DEEP-RECESSED GAS COOKTOP

- 30" cooktop with 5 burners
- Heavy-cast, dishwasher-safe edge-to-edge grates
- **18,000-BTU tri-ring burner**
- White LED backlit heavy-duty knobs
- **Control lock capability**
- Precise Simmer burner
- Sealed cooktop burners
- **Griddle included (JXGRIDL230)**
- MAX burner system

Stainless - PGP9030SLSS

Recommended Pair: PTD9000 (Double), PTS9000 (Single)



JGP5030

GE 30" GAS COOKTOP

- **30" cooktop with 5 burners**
- **Heavy-cast, edge-to-edge grates**
- 15,000-BTU Power Boil burner
- Precise Simmer burner
- Sealed cooktop burners
- Dishwasher-safe grates
- **Optional griddle (JXGRIDL230)**
- MAX burner system

Stainless - JGP5030SLSS

Black - JGP5030DLBB

Recommended Pair: JTD5000 (Double), JTS5000 (Single)



PGP7030

GE PROFILE 30" GAS COOKTOP

- 30" cooktop with 5 burners
- **Heavy-cast, edge-to-edge grates**
- **18,000-BTU Power Boil burner**
- **White LED backlit heavy-duty knobs**
- Precise Simmer burner
- Sealed cooktop burners
- Heavy-duty, dishwasher-safe grates
- **Optional griddle (JXGRIDL230)**
- **MAX burner system**

Stainless - PGP7030SLSS

Recommended Pair: PTD7000 (Double), PTS7000 (Single)



JGP3030

GE 30" DEEP-RECESSED GAS COOKTOP


- 15,000-BTU Power Boil burner
- Precise Simmer burner
- Sealed cooktop burners
- Heavy-duty, dishwasher-safe grates
- Stainless steel, deep-recessed cooktop
- MAX burner system

Stainless - JGP3030SLSS

White - JGP3030DLWW

Black - JGP3030DLBB

Recommended Pair: JTD3000 (Double), JTS3000 (Single)



Complete features and specifications on page 336.  
See page 100 for gas cooktop parts & accessories.  
See page 337 for approved cooktop and wall oven combinations.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.



GAS COOKTOPS PARTS & ACCESSORIES



	JXGRIDL236	JXGRIDL230
MODEL	36" CAST-IRON GRIDDLE	30" CAST-IRON GRIDDLE
PGP9036	INCLUDED	–
PGP7036	OPTIONAL UPGRADE	–
JGP5036	OPTIONAL UPGRADE	–
JGP3036	–	–
PGP9030	–	INCLUDED
PGP7030	–	OPTIONAL UPGRADE
JGP5030	–	OPTIONAL UPGRADE
JGP3030	–	–
PGP9830	–	–







# VENTILATION

## FEATURE HIGHLIGHTS




### ADJUSTABLE CFM

Make code compliance easy for builders with a fan speed that can be set to high or low.



### BACKLIT CONTROLS

Attractive controls are easy to read and easy to use.



### BUILT-IN WIFI/ VOICE-ENABLED

Turn on the night light from anywhere using SmartHQ™ on your smartphone or the sound of your voice.\*

Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.

\*Requires compatible voice assistant. Not all features available on all models.

## DESIGNER HOODS



Model shown in Black Stainless



### UVW9361

#### 36" SMART DESIGNER WALL-MOUNT HOOD WITH PERIMETER VENTING

- Perimeter venting
- LED backlit glass touch control
- Built-in WiFi powered by SmartHQ
- 610-CFM adjustable blower
- Triple-LED dimmable lighting
- 10-ft. ceiling height
- Hidden filter venting
- Timer and clock
- Chef Connect
- Four-speed fan control
- Optional 12' and 14' duct cover accessories

Stainless - UVW9361SLSS

Black Stainless - UVW9361BLTS

### UVW9301 (not shown)

#### 30" SMART DESIGNER WALL-MOUNT HOOD WITH PERIMETER VENTING

Similar to UVW9361 except 30" wide

Stainless - UVW9301SLSS

Black Stainless - UVW9301BLTS



### UVW8361

#### 36" DESIGNER WALL-MOUNT HOOD WITH DIMMABLE LED LIGHTING

- 350-CFM blower
- Dual LED dimmable lighting
- Electronic backlit controls
- Convertible venting options
- Chef Connect
- 9-ft. ceiling height
- Dishwasher-safe filter
- Optional 10', 12' and 14' duct cover accessories

Stainless - UVW8361SLSS

### UVW8301 (not shown)

#### 30" DESIGNER WALL-MOUNT HOOD WITH DIMMABLE LED LIGHTING

Similar to UVW8361 except 30" wide

Stainless - UVW8301SLSS

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.

Complete features and specifications on pages 338-339. See page 297 for Accessibility Requirements. See pages 109-111 for ventilation parts & accessories. For definitions of logos, see page 13.



CUSTOM HOOD INSERTS



UVC9480  
48" CUSTOM HOOD INSERT

- LED hood light
- 1,200 CFM blower
- Built-in WiFi
- Baffle filters
- Chef Connect
- Backlit push-button controls
- 4-speed fan
- Charcoal filter
- Night light

Stainless - UVC9480SLSS



UVC9420  
42" CUSTOM HOOD INSERT

- LED hood light
- 1,200 CFM blower
- Built-in WiFi
- Baffle filters
- Chef Connect
- Backlit push-button controls
- 4-speed fan
- Charcoal filter
- Night light

Stainless - UVC9420SLSS



UVC9360  
36" SMART DESIGNER CUSTOM INSERT WITH DIMMABLE LED LIGHTING


- 610-CFM adjustable blower
- Triple-LED dimmable lighting
- Dishwasher-safe, removable-baffle stainless steel filters
- Electronic backlit controls
- Built-in WiFi powered by SmartHQ™
- Chef Connect
- Four-speed fan control

Stainless - UVC9360SLSS

UVC9300 (not shown)  
GE 30" SMART DESIGNER CUSTOM INSERT WITH DIMMABLE LED LIGHTING

Similar to UVC9360 except 30" wide

Stainless - UVC9300SLSS



UVC7300  
20" CUSTOM HOOD INSERT WITH DIMMABLE LED LIGHTING

- 390-CFM blower
- Dual-LED dimmable lighting
- Dishwasher-safe filter
- Convertible venting options
- Push-button controls
- Four-speed fan control
- Optional 36" and 30" hood liner accessories

Stainless - UVC7300SLSS

Complete features and specifications on pages 339-342.  
See page 297 for Accessibility Requirements.  
See pages 109-111 for ventilation parts & accessories.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.

WALL-MOUNT & ISLAND-MOUNT HOODS



PV976  
GE PROFILE™ 36" WALL-MOUNT CHIMNEY HOOD

- **450-CFM venting system**
- Push-button controls
- Variable-speed fan control
- Vertical exhaust
- Dual halogen cooktop lighting
- Night light
- Dishwasher-safe filter

Stainless - PV976NSS

PV977 (not shown)  
GE PROFILE 36" ISLAND-MOUNT CHIMNEY HOOD

Similar to PV976 except island-mount

Stainless - PV977NSS

PV970 (not shown)  
GE PROFILE 30" WALL-MOUNT CHIMNEY HOOD

Similar to PV976 except 30" wide

Stainless - PV970NSS



Model shown in Slate

JVW5361  
GE 36" WALL-MOUNT PYRAMID CHIMNEY HOOD

- **350-CFM venting system with boost**
- Electronic backlit controls
- Dual halogen cooktop lighting
- Night light
- Convertible venting options
- Optional remote control for ADA installation (UXRC70)
- Optional 10' duct cover accessory

Stainless - JVW5361SJSS  
Slate - JVW5361EJES  
Black Slate - JVW5361FJDS



JVW5301 (not shown)  
GE 30" WALL-MOUNT PYRAMID CHIMNEY HOOD

Similar to JW5361 except 30" wide

Stainless - JVW5301SJSS  
Black Stainless - JVW5301BJTS  
Slate - JVW5301EJES  
Black Slate - JVW5301FJDS

COMMERCIAL & DESIGNER HOODS



**UVW9484**  
**48" PROFESSIONAL HOOD**

- 1,220 CFM vertical exhaust
- LED hood light
- Removable filter
- Dishwasher-safe baffle filters
- Variable-speed fan control

Stainless - UVW9484SPSS



**UVW9364**  
**36" COMMERCIAL HOOD**

- 600-CFM venting system
- Four-speed fan control
- Horizontal and vertical exhaust
- LED lighting
- Premium stainless steel baffle filters
- QuietBoost

Stainless - UVW9364SPSS



**UVW8364**  
**36" DESIGNER WALL-MOUNT HOOD WITH DIMMABLE LED LIGHTING**

- **600-CFM venting system**
- Four-speed fan control
- Vertical exhaust
- LED cooktop lighting
- Night light
- Removable grease filter
- Built-in WiFi powered by SmartHQ™
- 10" low-rise hood

Stainless - UVW8364SPSS

**UVW9304** (not shown)  
**30" COMMERCIAL HOOD**

Similar to UVW9364 except 30" wide

Stainless - UVW9304SPSS

**UVW8304** (not shown)  
**30" DESIGNER WALL-MOUNT HOOD WITH DIMMABLE LED LIGHTING**

Similar to UVW8364 except 30" wide

Stainless - UVW8304SPSS

Complete features and specifications on pages 340-344.  
See page 297 for Accessibility Requirements.  
See pages 109-111 for ventilation parts & accessories.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.

UNDER-THE-CABINET HOODS



**PVX7300**  
**GE PROFILE™ 30" UNDER-THE-CABINET HOOD**


- **Four-speed with boost, 390-CFM venting system**
- 10-minute installation
- Glass touch controls
- Dual LED lighting with night light (bulbs included)
- Chef Connect
- Auto-off
- Convertible venting options
- Dual full-length, dishwasher-safe stainless steel mesh filters
- Optional remote control for ADA installation (UXRC70)

Stainless - PVX7300SJSS

**PVX7360** (not shown)  
**GE PROFILE 36" UNDER-THE-CABINET HOOD**

Similar to PVX7300 except 36" wide

Stainless - PVX7360SJSS



**J VX5305**  
**GE 30" ENERGY STAR® CERTIFIED UNDER-THE-CABINET HOOD**

- **Two-speed, 270-CFM venting system**
- 10-minute installation
- Front controls
- Dual LED lighting with night light (bulbs included)
- Convertible venting options
- Vertical and rear exhaust
- Dual full-length, dishwasher-safe metal mesh filters
- Optional wall switch for ADA installation

Stainless - J VX5305SJSS  
White - J VX5305DJWW  
Black - J VX5305DJBB



**J VX5300**  
**GE 30" UNDER-THE-CABINET HOOD**

- **Four-speed with boost, 310-CFM venting system**
- 10-minute installation
- Electronic backlit controls
- Dual halogen lighting with night light (bulbs included)
- Auto-off
- Convertible venting options
- Dual full-length, dishwasher-safe metal mesh filters
- Optional remote control for ADA installation (UXRC70)

Stainless - J VX5300SJSS  
Black Stainless - J VX5300BJTS  
Slate - J VX5300EJES  
White - J VX5300DJWW  
Black - J VX5300DJBB

**J VX5360** (not shown)  
**GE 36" UNDER-THE-CABINET HOOD**

Similar to J VX5300 except 36" wide

Stainless - J VX5360SJSS  
White - J VX5360DJWW



**J VX3300**  
**GE 30" UNDER-THE-CABINET HOOD**

- **Two-speed, 200-CFM venting system**
- 10-minute installation
- Front controls
- Cooktop lighting (bulb included)
- Convertible venting options
- Vertical and rear exhaust
- Single dishwasher-safe metal mesh filter
- Optional wall switch for ADA installation

Stainless - J VX3300SJSS  
Slate - J VX3300EJES  
White - J VX3300DJWW  
Black - J VX3300DJBB

**J VX3240** (not shown)  
**GE 24" UNDER-THE-CABINET HOOD**

Similar to J VX3300 except 24" wide

Stainless - J VX3240SJSS  
White - J VX3240DJWW



UNDER-THE-CABINET HOODS



Model shown in White

JV338  
GE 30" STANDARD HOOD

- 170-CFM venting system
- Vertical and rear exhaust

White - JV338HWW  
Black - JV338HBB

JN327 (not shown)  
GE 30" NON-VENTED HOOD

Similar to JV338 except non-vented

White - JN327HWW  
Bisque - JN327HCC  
Black - JN327HBB

TELESCOPIC DOWNDRAFT SYSTEM



UVD6361  
36" TELESCOPIC DOWNDRAFT SYSTEM

- 500-CFM venting system
- Variable-speed fan control
- Rises 8-1/2" above cooktop surface
- Retracts when not in use
- Separate remote raise/lower switch

Stainless - UVD6361SPSS  
Black - UVD6361DPBB

UVD6301 (not shown)  
30" TELESCOPIC DOWNDRAFT SYSTEM

Similar to UVD6361 except 30" wide

Stainless - UVD6301SPSS  
Black - UVD6301DPBB

Complete features and specifications on pages 343-344.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.




VENTILATION PARTS & ACCESSORIES



	<b>CX8DC9SPSS</b> 8-FT. CEILING DUCT COVER KIT	<b>UXDC53/UXDC72</b> RANGE HOOD 10-FT. DUCT COVER KIT	<b>UX10DC8</b> 10-FT. CEILING DUCT COVER KIT	<b>UX12DC9</b> 12-FT. CEILING DUCT COVER KIT	<b>UX14DC9</b> 14-FT. CEILING DUCT COVER KIT
	<b>CX10DC9SPSS</b> 10-FT. CEILING DUCT COVER KIT				
	<b>CX12DC9SPSS</b> 12-FT. CEILING DUCT COVER KIT				
	<ul style="list-style-type: none"><li>• For use with GE 30" and 36" designer hoods</li><li>• Covers exposed duct-work running from the hood to ceilings</li><li>• GE genuine parts warranty</li></ul>	<ul style="list-style-type: none"><li>• For higher ceiling installations, the optional 10-ft. ceiling duct cover kit is available, purchased separately</li><li>• UXDC53: one piece to be used with the supplied duct cover included in box</li><li>• UXDC72: two-piece kit to replace the supplied duct cover included in box</li></ul>	<ul style="list-style-type: none"><li>• For higher ceiling installations, the optional 10-ft. ceiling duct cover kit is available, purchased separately</li><li>• Includes a longer chimney that replaces the original in the package</li></ul>	<ul style="list-style-type: none"><li>• For higher ceiling installations, the optional 12-ft. ceiling duct cover kit is available, purchased separately</li><li>• Includes a longer chimney that replaces the original in the package</li></ul>	<ul style="list-style-type: none"><li>• For higher ceiling installations, the optional 14-ft. ceiling duct cover kit is available, purchased separately</li><li>• Includes a longer chimney that replaces the original in the package</li></ul>
MODEL					
UVW9361	-	-	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW9301	-	-	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW8361	-	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW8301	-	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVC9360	-	-	-	-	-
UVC9300	-	-	-	-	-
UVC7300	-	-	-	-	-
PV977	-	-	-	-	-
PV976	-	-	-	-	-
PV970	-	-	-	-	-
JVW5361	-	OPTIONAL UPGRADE	-	-	-
JVW5301	-	OPTIONAL UPGRADE	-	-	-
UVD6361	-	-	-	-	-
UVD6301	-	-	-	-	-
PVX7360	-	-	-	-	-
PVX7300	-	-	-	-	-
JVX5360	-	-	-	-	-
JVX5300	-	-	-	-	-
JVX5365	-	-	-	-	-
JVX5305	-	-	-	-	-
JVX3300	-	-	-	-	-
JVX3240	-	-	-	-	-
JV338	-	-	-	-	-
JN327	-	-	-	-	-
UVW8304	OPTIONAL UPGRADE	-	-	-	-
UVW8364	OPTIONAL UPGRADE	-	-	-	-
UVW9304	OPTIONAL UPGRADE	-	-	-	-
UVW9364	OPTIONAL UPGRADE	-	-	-	-

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM) BY USING GE PARTS ACCOUNT NUMBER.



VENTILATION PARTS & ACCESSORIES

<div></div>					
	JXDA22	JXMUA6	JXMUA8	JXHC1	UXBDA812
	GE OPTIONAL DAMPER	AUTOMATIC MAKE-UP AIR DAMPER FOR 6" DUCT	AUTOMATIC MAKE-UP AIR DAMPER FOR 8" DUCT	GE CORD KIT	BACK DAMPER ACCESSORY
	<ul style="list-style-type: none"><li>• For use with GE deluxe hoods</li><li>• Allows hood to fit a standard 7" round duct</li><li>• GE genuine parts warranty</li></ul>			<ul style="list-style-type: none"><li>• Allows range hoods to be installed with a plug and receptacle instead of being hard-wired</li><li>• Ideal when upgrading from standard vent hood to Spacemaker® over-the-range microwave hoods</li><li>• Eliminates need to have an electrician come to the home when the microwave is being installed</li></ul>	
MODEL					
UVW9361	-	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE	-
UVW9301	-	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE	-
UVW8361	-	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE	-
UVW8301	-	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE	-
UVC9360	-	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE	-
UVC9300	-	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE	-
UVC7300	-	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE	-
PV977	-	-	-	-	-
PV976	-	-	-	-	-
PV970	-	-	-	-	-
JVW5361	-	OPTIONAL UPGRADE	-	-	-
JVW5301	-	OPTIONAL UPGRADE	-	-	-
UVD6361	-	-	-	-	-
UVD6301	-	-	-	-	-
PVX7360	-	-	-	OPTIONAL UPGRADE	-
PVX7300	-	-	-	OPTIONAL UPGRADE	-
JVX5360	-	-	-	OPTIONAL UPGRADE	-
JVX5300	-	-	-	OPTIONAL UPGRADE	-
JVX5365	-	-	-	OPTIONAL UPGRADE	-
JVX5305	-	-	-	OPTIONAL UPGRADE	-
JVX3300	-	-	-	OPTIONAL UPGRADE	-
JVX3240	-	-	-	OPTIONAL UPGRADE	-
JV338	-	-	-	OPTIONAL UPGRADE	-
JN327	-	-	-	OPTIONAL UPGRADE	-
UVW8304	-	-	-	-	OPTIONAL UPGRADE
UVW8364	-	-	-	-	OPTIONAL UPGRADE
UVW9304	-	-	-	-	OPTIONAL UPGRADE
UVW9364	-	-	-	-	OPTIONAL UPGRADE



<div></div>				
	JXCF72/WB02X24842	UXRC70/WB02X24870	JXS56SS	JXS50SS
	RANGE HOOD CHARCOAL FILTER- 2-PACK	RANGE HOOD REMOTE CONTROL	15" CABINET SPACER FOR 36" HOODS	15" CABINET SPACER FOR 30" HOODS
MODEL				
JVW5361	OPTIONAL UPGRADE	OPTIONAL UPGRADE	-	-
JVW5301	OPTIONAL UPGRADE	OPTIONAL UPGRADE	-	-
UVD6361	-	-	-	-
UVD6301	-	-	-	-
PVX7360	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE	-
PVX7300	-	OPTIONAL UPGRADE	-	OPTIONAL UPGRADE
JVX5360	-	OPTIONAL UPGRADE	OPTIONAL UPGRADE	-
JVX5300	-	OPTIONAL UPGRADE	-	OPTIONAL UPGRADE
JVX5365	-	-	OPTIONAL UPGRADE	-
JVX5305	-	-	-	OPTIONAL UPGRADE
JVX3300	-	-	-	OPTIONAL UPGRADE
UVW8304	-	-	-	-
UVW8364	-	-	-	-
UVW9304	-	-	-	-
UVW9364	-	-	-	-

	UXN70	UXCF91	UXDT86
	RECIRCULATING KIT	CHARCOAL FILTER	DUCT REDUCER
MODEL			<ul style="list-style-type: none"> <li>• Transition piece from 8" duct cover to 6" duct cover</li> </ul>
UVW9361	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW9301	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW8361	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW8301	–	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVC9360	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVC9300	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVC7300	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL UPGRADE
UVW8304	–	–	–
UVW8364	–	–	–
UVW9304	–	–	–
UVW9364	–	–	–

	UXHL30	UXHL36
	30" HOOD LINER	36" HOOD LINER
MODEL	<ul style="list-style-type: none"> <li>• Custom appearance and built-in convenience</li> </ul>	<ul style="list-style-type: none"> <li>• Custom appearance and built-in convenience</li> </ul>
UVW9361	–	–
UVW9301	–	–
UVW8361	–	–
UVW8301	–	–
UVC9360	–	–
UVC9300	–	–
UVC7300	REQUIRED FOR 30" INSTALLATION	REQUIRED FOR 36" INSTALLATION
UVW8304	–	–
UVW8364	–	–
UVW9304	–	–
UVW9364	–	–

	UXB630BPTS	UXB636BPTS
	30" TELESCOPIC HOOD TRIM ACCESSORY	36" TELESCOPIC HOOD TRIM ACCESSORY
MODEL		
UVD6301SPSS	OPTIONAL UPGRADE	–
UVD6301DPBB	OPTIONAL UPGRADE	–
UVD6361SPSS	–	OPTIONAL UPGRADE
UVD6361DPBB	–	OPTIONAL UPGRADE


ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM) BY USING GE PARTS ACCOUNT NUMBER.





# DROP-IN RANGES

## FEATURE HIGHLIGHTS



### 9"/6" POWER BOIL ELEMENT

This powerful element supplies the intense heat needed for faster boiling, sautéing and stir-frying.



### SELF-CLEAN OVEN

Self-clean allows you to spare yourself the trouble and effort it takes to scrub the oven interior. The oven does all the work!



### DUAL-ELEMENT BAKE

This top-and-bottom heating produces uniform browning and fast oven preheating.


## DROP-IN ELECTRIC RANGES



- JD630**  
**GE 30" DROP-IN RANGE**
- **9"/6" Power Boil element**
  - **Self-clean oven**
  - **Ceramic-glass cooktop**
  - **Black gloss oven interior**
  - Dual-element bake
  - Electronic oven controls

Stainless - JD630SFSS  
White - JD630DFWW  
Black - JD630DFBB

Recommended Pair: JVM6175




- JM250**  
**GE 27" DROP-IN RANGE**
- Self-clean oven
  - Sensi-Temp Technology
  - Black gloss oven interior
  - Chrome drip bowls
  - Electronic clock and timer

White - JM250DFWW  
Black - JM250DFBB

Recommended Pair: JVM3160



Model shown in White







# SLIDE-IN ELECTRIC RANGES

WITH FRONT CONTROLS

## FEATURE HIGHLIGHTS



### BUILT-IN WIFI POWERED BY SmarthQ™

Connect, control and manage your oven from anywhere with your smartphone or tablet. Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.



### UPGRADEABLE FEATURE DOWNLOADS

Ensure your oven always has the latest features, like new air fry modes, with downloadable software upgrades.




### NO-PREHEAT AIR FRY

Cook crispier, healthier versions of your favorite foods with an air fryer built right into the oven. Best of all, it doesn't require preheating, saving you time.



### GUIDED COOKING

Enjoy a streamlined experience with guided cooking from Hestan Cue™, a system that combines video-guided recipes with automatic range adjustments.



### IN-OVEN COOKCAM™

Use a heat-resistant camera and the SmarthQ app to monitor food from anywhere.



### COOKTOP SENSOR

Control the temperature of any induction-ready pan through a smart device or the control panel.




### GLIDE TOUCH CONTROLS

Precisely control element temperature with just the swipe of a finger.



### TWO 8" 2,500-WATT SYNCHRONIZED ELEMENTS

Control two 8" elements simultaneously to evenly heat large cookware or griddles.





### FIT GUARANTEE

No-preheat air fry slide-in ranges from GE Appliances are guaranteed for an exact fit to make replacement easy. See [sales.associate@geappliances.com](http://sales.associate@geappliances.com) for details.

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners. Not all features available on all models.





SLIDE-IN ELECTRIC RANGES





- PHS93X**  
**GE PROFILE™ 30" SMART SLIDE-IN, FRONT-CONTROL INDUCTION AND CONVECTION RANGE**
- Upgradeable feature downloads
  - Built-in WiFi powered by SmartHQ™\*
  - **In-oven CookCam™**
  - **Precision cooktop sensor**
  - Guided cooking
  - Sous-vide capability
  - **Precision oven modes**
  - No-preheat air fry
  - Fingerprint Resistant Stainless
  - **Brilliant Touch 7" Display**
  - Fit guarantee\*\*

■ Fingerprint Resistant Stainless – PHS93XYPFS  
Recommended Pair: PSA9120





- PHS930**  
**GE PROFILE 30" SMART SLIDE-IN, FRONT-CONTROL INDUCTION AND CONVECTION RANGE**
- Upgradeable feature downloads
  - Built-in WiFi powered by SmartHQ\*
  - **Guided cooking**
  - **Sous-vide capability**
  - No-preheat air fry
  - Fingerprint Resistant Stainless
  - Glide touch controls
  - **Induction technology**
  - Two 8" synchronized elements
  - Fit guarantee\*\*

■ Fingerprint Resistant Stainless – PHS930YPFS  
■ Black Stainless – PHS930BPTS  
Recommended Pair: PSA9120





- PS960**  
**GE PROFILE 30" SMART SLIDE-IN DOUBLE OVEN CONVECTION RANGE**
- No-preheat air fry
  - Upgradeable feature downloads
  - Built-in WiFi powered by SmartHQ\*
  - No-preheat air fry
  - 12"/9"/6" 3,600-watt Power Boil
  - **8"/5" and 8" synchronized elements**
  - Fingerprint Resistant Stainless
  - Glide touch controls
  - Chef Connect\*\*\*
  - True Convection with Precise Air
  - Never-Scrub, heavy-duty, smooth-glide racks
  - Temperature probe
  - Fit guarantee\*\*

■ Fingerprint Resistant Stainless – PS960YPFS  
Recommended Pair: PVM9179




- PSS93**  
**GE PROFILE 30" SMART SLIDE-IN ELECTRIC CONVECTION RANGE**
- Upgradeable feature downloads
  - Built-in WiFi powered by SmartHQ\*
  - No-preheat air fry
  - **Fingerprint Resistant Stainless**
  - **12"/9"/6" 3,600-watt Power Boil**
  - **Two 8" synchronized elements**
  - **Glide touch controls**
  - **Chef Connect\*\*\***
  - **True Convection with Precise Air**
  - Steam Clean
  - Fit guarantee\*\*

■ Fingerprint Resistant Stainless – PSS93YPFS  
■ Black Stainless – PSS93BPTS  
Recommended Pair: PSA9120





- JSS86**  
**GE PROFILE 30" SLIDE-IN ELECTRIC CONVECTION RANGE**
- No-preheat air fry
  - 12"/9" dual element
  - **True Convection**
  - 9"/6" Power Boil element
  - Fifth warming zone
  - Fast preheat
  - Steam Clean
  - Hidden bake oven interior
  - Glass touch control
  - Large-capacity double oven
  - Fit guarantee\*\*

■ Stainless – JSS86SPSS  
Recommended Pair: JVM7195



- JS645**  
**GE 30" SLIDE-IN RANGE**
- **Two 9"/6" 3,100-watt Power Boil elements**
  - Self-clean oven
  - 5.3 cu. ft. oven capacity
  - Dual-element bake
  - Finished sides
  - Removable full-width storage drawer
  - Stainless steel knobs
  - White LED
  - Fit guarantee\*\*

■ Stainless – JS645SLSS  
■ Slate – JS645ELES  
■ White – JS645DLWW  
Recommended Pair: JVM6175



- JS760**  
**GE 30" SLIDE-IN CONVECTION RANGE**
- No-preheat air fry
  - Upgradeable feature downloads
  - **Built-In WiFi powered by SmartHQ\***
  - 12"/9" dual element
  - **Convection fan**
  - 9"/6" 3,100-watt Power Boil element
  - **Fifth element warming zone**
  - **Fast preheat**
  - **Self-clean with Steam Clean option**
  - **Smooth-glide storage drawer**
  - **Hidden bake oven interior**
  - Fit guarantee\*\*

■ Stainless – JS760SPSS  
■ Slate – JS760EPES  
■ Black Slate – JS760FPDS  
■ White – JS760DPWW  
Recommended Pair: JVM7195

\*See page 347 for WiFi-enabled features.  
\*\*See sales associate or visit [geappliances.com](http://geappliances.com) for details.  
\*\*\*Chef Connect functionality available only when pairing to compatible over-the-range microwave ovens and hoods. Complete features and specifications on pages 347-348. See page 122 for slide-in electric range parts & accessories.

See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.  
The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.





# SLIDE-IN GAS RANGES

WITH FRONT CONTROLS

## FEATURE HIGHLIGHTS



### BUILT-IN WIFI POWERED BY SmarthQ™

Connect, control and manage your oven from anywhere with your smartphone or tablet. Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.



### UPGRADEABLE FEATURE DOWNLOADS

Ensure your oven always has the latest features, like new air fry modes, with downloadable software upgrades.




### NO-PREHEAT AIR FRY

Cook crispier, healthier versions of your favorite foods with an air fryer built right into the oven. Best of all, it doesn't require preheating, saving you time.



### 21,000-BTU TRI-RING BURNER

Versatile burner creates intense heat perfect for searing, frying and sautéing.



### REVERSIBLE CAST-IRON INTEGRATED GRIDDLE/GRILL

From grilled cheese to pancakes to quesadillas, do it all right on the cooktop.



### DUAL-PURPOSE CENTER BURNER

Cook your way with a round burner for steaming broccoli and an oval burner for grilling sandwiches.



### TRUE CONVECTION WITH PRECISE AIR

Accurate heat circulation ensures evenly baked foods.



### CHEF CONNECT

Three options with a single touch. For instant convenience, choose when to automatically sync clocks and the range elements with the microwave's surface light and vent.




### FIT GUARANTEE

Replace your old 30" free-standing range with a new 30" slide-in model. Our slide-in ranges are guaranteed for an exact fit to make replacement easy. See sales associate or [geappliances.com](http://geappliances.com) for details.



SLIDE-IN GAS RANGES




- PGS960**  
**GE PROFILE™ 30" SMART SLIDE-IN, FRONT-CONTROL GAS DOUBLE OVEN CONVECTION RANGE**
- Upgradeable feature downloads
  - Built-in WiFi powered by SmarHq™\*
  - No-preheat air fry
  - Edge-to-edge cooktop
  - 21,000-BTU tri-ring burner
  - Extra-large, integrated, reversible cast-iron grill/griddle
  - Dual-purpose center burner
  - 15,000-BTU Power Boil burner
  - Chef Connect\*\*\*
  - **Large-capacity double oven**
  - True Convection
  - Fit guarantee\*\*

■ Fingerprint Resistant Stainless – PGS960YPFS

Recommended Pair: PSA9120



Model shown in Black Stainless



- PGS930**  
**GE PROFILE 30" SMART SLIDE-IN, FRONT-CONTROL RANGE**
- Upgradeable feature downloads
  - Built-in WiFi powered by SmarHq™\*
  - No-preheat air fry
  - Edge-to-edge cooktop
  - 21,000-BTU tri-ring burner
  - Extra-large, integrated, reversible cast-iron grill/griddle
  - Dual-purpose center burner
  - 15,000-BTU Power Boil burner
  - Chef Connect\*\*\*
  - True Convection
  - Fit guarantee\*\*

■ Fingerprint Resistant Stainless – PGS930YPFS  
■ Black Stainless – PGS930BPTS

Recommended Pair: PVM9179



Model shown in Slate




- JGS760**  
**GE 30" SLIDE-IN, FRONT-CONTROL CONVECTION RANGE**
- **No-preheat air fry**
  - **Upgradeable feature downloads**
  - **Built-in WiFi powered by SmarHq™\***
  - Edge-to-edge cooktop
  - Extra-large, integrated, non-stick griddle
  - 18,000-BTU Power Boil burner
  - **Gas convection**
  - **Self-clean with Steam Clean option**
  - Smooth-glide storage drawer
  - 10,000-BTU oval burner
  - Heavy-duty, dishwasher-safe grates
  - Fit guarantee\*\*

■ Stainless – JGS760SPSS  
■ Slate – JGS760EPES  
■ Black Slate – JGS760FPDS  
■ White – JGS760DPWW

Recommended Pair: JVM7195



Model shown in Slate



- JGSS66**  
**GE 30" SLIDE-IN GAS RANGE**
- Edge-to-edge cooktop
  - Two 15,000-BTU Power Boil burners
  - **Extra-large, integrated, non-stick griddle**
  - **10,000-BTU oval burner**
  - Steam Clean
  - In-oven broil
  - Smooth-glide storage drawer
  - 5.3 cu. ft. oven capacity
  - Fit guarantee\*\*

■ Stainless – JGSS66SELSS  
■ Slate – JGSS66EELES


Recommended Pair: JVM6175



- P2S930**  
**GE PROFILE 30" SMART SLIDE-IN, DUAL-FUEL, FRONT-CONTROL RANGE**
- **Upgradeable feature downloads**
  - Built-in WiFi powered by SmarHq™\*
  - No-preheat air fry
  - Edge-to-edge cooktop
  - **21,000-BTU Tri-ring burner**
  - **Extra-large, integrated, reversible cast-iron grill/griddle**
  - **Dual-purpose center burner**
  - 15,000-BTU Power Boil burner
  - **Chef Connect\*\*\***
  - **True Convection**
  - Fit guarantee\*\*

■ Fingerprint Resistant Stainless – P2S930YPFS


Recommended Pair: PVM9179



- JGSS86**  
**GE 30" SLIDE-IN, FRONT-CONTROL GAS DOUBLE OVEN RANGE**
- No-preheat air fry
  - Edge-to-edge cooktop
  - 15,000-BTU Power Boil burner
  - 18,000-BTU Power Boil burner
  - Extra-large, integrated cast-iron griddle
  - 10,000-BTU oval burner
  - Steam Clean
  - In-oven broil
  - True Convection
  - **Large-capacity double oven**
  - Fit guarantee\*\*

■ Stainless – JGSS86SPSS

Recommended Pair: JVM7195



- JGSS61**  
**GE 30" SLIDE-IN FRONT CONTROL GAS RANGE**
- Edge-to-edge cooktop
  - Two 15,000-BTU Power Boil Burners
  - Precise Simmer burner
  - Heavy duty, dishwasher-safe grates
  - Steam Clean
  - In-oven broil
  - Smooth-glide storage drawer
  - Large capacity oven
  - Finished sides
  - Fit guarantee\*\*

■ Stainless – JGSS61SPSS



Recommended Pair: JVM6175



\*See page 349 for WiFi-enabled features.  
\*\*See sales associate or visit geappliances.com for details.  
\*\*\*Chef Connect functionality available only when pairing to compatible over-the-range microwave ovens and hoods. Complete features and specifications on pages 349-350. See page 123 for slide-in gas range parts & accessories.






See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.  
The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.



SLIDE-IN ELECTRIC RANGE PARTS & ACCESSORIES

 		
	<b>JXFILLR1SS/DD/BB</b>	<b>WB4820881 OR WB48X20862</b>
	FILLER KIT	NEVER-SCRUB ROLLER RACK
	<ul style="list-style-type: none"><li>• Eliminates gap between counter and appliances for a seamless look</li><li>• Adheres directly to counter</li><li>• Easy to install</li><li>• Color options: Stainless, Dark Gray, Black</li></ul>	<ul style="list-style-type: none"><li>• Easily remove even the heaviest dishes with a roller rack that's engineered to glide seamlessly out of the oven</li></ul>
<b>MODEL</b>		
<b>PHS93XYPFS</b>	OPTIONAL UPGRADE	<b>INCLUDED</b>
<b>PHS930YPFS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
<b>PHS930BPTS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
<b>PSS93YPFS</b>	OPTIONAL UPGRADE	—
<b>PSS93BPTS</b>	OPTIONAL UPGRADE	—
<b>PS960YPFS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20862)
<b>JSS86SPSS</b>	OPTIONAL UPGRADE	—
<b>JS760SPSS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
<b>JS760EPES</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
<b>JS760FPDS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
<b>JS760DPWW</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
<b>JS760DPBB</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
<b>JS645SLSS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
<b>JS645ELES</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
<b>JS645FLDS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)
<b>JS645DLWW</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20881)

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM) BY USING GE PARTS ACCOUNT NUMBER.

SLIDE-IN GAS RANGE PARTS & ACCESSORIES

    					
	<b>JXFILLR1SS/DD/BB</b>	<b>WB48X20990 OR WB48X21543</b>	<b>JXGRILL1 / WB31X24998</b>	<b>WB31X24738</b>	<b>JXGRATE1/ WB31X27150</b>
	FILLER KIT	NEVER-SCRUB ROLLER RACK	REVERSIBLE CAST-IRON GRIDDLE/GRILL	NON-STICK ALUMINUM GRIDDLE	CENTER GRATE
	<ul style="list-style-type: none"><li>• Eliminates gap between counter and appliances for a seamless look</li><li>• Adheres directly to counter</li><li>• Easy to install</li><li>• Color options: Stainless, Dark Gray, Black</li></ul>	<ul style="list-style-type: none"><li>• Easily remove even the heaviest dishes with a roller rack that's engineered to glide seamlessly out of the oven</li></ul>	<ul style="list-style-type: none"><li>• Cast iron</li><li>• Interlocks with grates</li><li>• Reversible</li></ul>	<ul style="list-style-type: none"><li>• Heavy-duty, cast-iron construction</li><li>• Interlocks with grates</li></ul>	<ul style="list-style-type: none"><li>• Middle grate</li><li>• Ideal for cooking with odd-sized cookware</li><li>• Accommodates the dual-purpose center burner</li></ul>
<b>MODEL</b>					
<b>PGS960YPFS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	<b>INCLUDED</b>	OPTIONAL UPGRADE	<b>INCLUDED</b>
<b>P2S930YPFS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X20990)	<b>INCLUDED</b>	OPTIONAL UPGRADE	<b>INCLUDED</b>
<b>PGS930YPFS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	<b>INCLUDED</b>	OPTIONAL UPGRADE	<b>INCLUDED</b>
<b>PGS930BPTS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	<b>INCLUDED</b>	OPTIONAL UPGRADE	<b>INCLUDED</b>
<b>JGSS86SPSS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	OPTIONAL UPGRADE	<b>INCLUDED</b>	OPTIONAL UPGRADE
<b>JGS760SPSS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	OPTIONAL UPGRADE	<b>INCLUDED</b>	OPTIONAL UPGRADE
<b>JGS760EPES</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	OPTIONAL UPGRADE	<b>INCLUDED</b>	OPTIONAL UPGRADE
<b>JGS760FPDS</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	OPTIONAL UPGRADE	<b>INCLUDED</b>	OPTIONAL UPGRADE
<b>JGS760DPWW</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	OPTIONAL UPGRADE	<b>INCLUDED</b>	OPTIONAL UPGRADE
<b>JGS760DPBB</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE (WB48X21543)	OPTIONAL UPGRADE	<b>INCLUDED</b>	OPTIONAL UPGRADE
<b>JGSS66SELSS</b>	OPTIONAL UPGRADE	—	OPTIONAL UPGRADE	<b>INCLUDED</b>	OPTIONAL UPGRADE
<b>JGSS66EELES</b>	OPTIONAL UPGRADE	—	OPTIONAL UPGRADE	<b>INCLUDED</b>	OPTIONAL UPGRADE
<b>JGS66FELDS</b>	OPTIONAL UPGRADE	—	OPTIONAL UPGRADE	<b>INCLUDED</b>	OPTIONAL UPGRADE
<b>JGSS61SPSS</b>	OPTIONAL UPGRADE	—	—	—	—

 	
<b>PM15X113</b>	<b>PM15X103</b>
4' UNIVERSAL GAS RANGE CONNECTION WITH AUTO SHUTOFF KIT	4' UNIVERSAL GAS RANGE INSTALLATION KIT
<ul style="list-style-type: none"><li>• Includes step-by-step instructions</li><li>• Helps prevent a hazardous buildup of gas</li><li>• For indoor and outdoor use</li></ul>	<ul style="list-style-type: none"><li>• Fits most major brands</li><li>• For indoor or outdoor use</li><li>• Easy to install</li></ul>
APPLIES TO ALL SLIDE-IN GAS RANGES	APPLIES TO ALL SLIDE-IN GAS RANGES





# FREE-STANDING ELECTRIC RANGES

## FEATURE HIGHLIGHTS



### BUILT-IN WIFI POWERED BY SmarthQ™

Connect, control and manage your oven from anywhere with your smartphone or tablet. Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.



### NO-PREHEAT AIR FRY

With air fry right in the oven, it's easy to cook healthier, crispier foods without the grease. Plus, there's no preheat required.



### FINGERPRINT RESISTANT STAINLESS

Easily wipe away smudges and prints with a Stainless finish that always looks clean.



### SELF-CLEAN AND STEAM CLEAN OPTION

Choose self-clean for tough messes or Steam Clean (available on select models) for light soils or right after cooking.



### 12"/9"/6" POWER BOIL ELEMENT

Every pot and pan fits perfectly on the flexible heating element, capable of delivering an industry-leading 3,600 watts of power.



### GRIDDLE ZONE

Create the perfect place for a griddle, grill, or other large cookware with two same-sized burners that work together to create an evenly heated griddle zone right on the cooktop.



### CHEF CONNECT

Three options with a single touch. For instant convenience, choose when to automatically sync clocks and the range elements with the microwave's surface light and vent.



### TRUE CONVECTION WITH PRECISE AIR

Enjoy golden-brown, perfectly even results with a third heating element and a reversing fan that provides enhanced heat and air circulation.



### FAST PREHEAT


It's never long until dinner, with two heating elements that cut down on the time it takes to preheat the oven.



FREE-STANDING ELECTRIC RANGES



Model shown in Black Stainless



- PB965**  
**GE PROFILE™ 30" SMART DOUBLE OVEN RANGE WITH CONVECTION**
- No-preheat air fry
  - Built-in WiFi powered by SmartHQ™
  - Upgradeable feature downloads
  - Fingerprint Resistant Stainless
  - 12"/9"/6" 3,600-watt Power Boil
  - 8"/5" dual element
  - Griddle zone
  - **Chef Connect\***
  - True Convection with Precise Air
  - **Large-capacity double oven**
  - Fast preheat

- Fingerprint Resistant Stainless - PB965YPFS
- Black Stainless - PB965BPTS

Recommended Pair: PB965BPTS



- PB935**  
**GE PROFILE 30" SMART CONVECTION RANGE**
- No-preheat air fry
  - **Built-in WiFi powered by SmartHQ**
  - **Upgradeable feature downloads**
  - Fingerprint Resistant Stainless
  - **12"/9"/6" 3,600-watt Power Boil**
  - 8"/5" dual element
  - **Griddle zone**
  - **True Convection with Precise Air**
  - Fast preheat

- Fingerprint Resistant Stainless - PB935YPFS

Recommended Pair: PVM9215



- JB655**  
**GE 30" CONVECTION RANGE**
- **No-preheat air fry**
  - **Fingerprint resistant options**
  - **12"/9" dual element**
  - **Fan convection**
  - 9"/6" Power Boil element
  - Fifth element warming zone
  - Self-clean oven
  - 5.3 cu. ft. oven capacity
  - Removable full-width storage drawer

- Stainless - JB655SKSS
- Fingerprint Resistant Stainless - JB655YKFS
- Slate - JB655EKES
- White - JB655DKWW
- Black - JB655DKBB

Recommended Pair: JVM6175



- JB645**  
**GE 30" RANGE**
- **Two 9"/6" Power Boil elements**
  - Self-clean oven
  - Dual-element bake
  - Ceramic-glass cooktop
  - Removable full-width storage drawer
  - 5.3 cu. ft. oven capacity

- Stainless - JB645RKSS
- Slate - JB645EKES
- White - JB645DKWW
- Black - JB645DKBB


Recommended Pair: JVM3160



- JBS86**  
**GE 30" DOUBLE OVEN RANGE WITH CONVECTION**
- No-preheat air fry
  - Convection
  - 12"/9" Power Boil element
  - 9"/6" Power Boil element
  - Warming mode
  - Fifth element warming zone
  - Steam Clean
  - Fast preheat
  - **Large-capacity double oven**

- Stainless - JBS86SPSS
- Slate - JBS86EPES


Recommended Pair: JVM7195



- JB735**  
**GE 30" CONVECTION RANGE**
- No-preheat air fry
  - 12"/9" dual element
  - Fan convection
  - Fast preheat
  - Fifth element warming zone
  - **Self-clean with Steam Clean option**
  - **Hidden bake element**
  - Black gloss interior

- Stainless - JB735SPSS
- Slate - JB735EPES
- Black Slate - JB735FPDS
- White - JB735DPWW
- Black - JB735DPBB


Recommended Pair: JVM6175



- JBS60**  
**GE 30" RANGE**
- **9"/6" Power Boil element**
  - 5.3 cu. ft. oven capacity
  - Ceramic-glass cooktop
  - Removable full-width storage drawer
  - Dual-element bake

- Stainless - JBS60RKSS
- White - JBS60DKWW
- Black - JBS60DKBB

Recommended Pair: JVM3160



- JB625**  
**GE 30" RANGE**
- 8" Power Boil element
  - 5.3 cu. ft. oven capacity
  - Ceramic-glass cooktop
  - **Self-clean oven**
  - Removable full-width storage drawer
  - Dual-element bake

- Stainless - JB625RKSS
- White - JB625DKWW
- Black - JB625DKBB

Recommended Pair: JVM3160



\*Chef Connect functionality available only when pairing to compatible over-the-range microwave ovens and hoods. Complete features and specifications on pages 351-353. See pages 130-131 for free-standing electric range parts & accessories.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.  
The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.



FREE-STANDING ELECTRIC RANGES




**JB480**  
**GE 30" RANGE**

- Front controls
- **Ceramic-glass cooktop**
- 5.0 cu. ft. oven capacity
- Self-clean oven
- Dual-element bake
- Removable full-width storage drawer

■ Stainless - JB480SMSS  
□ White - JB480DMWW  
■ Black - JB480DMBB

Recommended Pair: JVM3160




**JBS460**  
**GE 30" RANGE**

- **Front controls**
- 5.0 cu. ft. oven capacity
- Sensi-Temp Technology
- Dual-element bake
- Standard-clean oven
- Removable full-width storage drawer

□ White - JBS460DMWW  
■ Black - JBS460DMBB

Recommended Pair: JVM3160




**JBS360**  
**GE 30" RANGE**

- 5.0 cu. ft. oven capacity
- Standard-clean oven
- Sensi-Temp Technology
- **Electronic clock and timer**
- Removable full-width storage drawer
- Dual-element bake

■ Stainless - JBS360RRSS  
□ White - JBS360DMWW  
■ Black - JBS360DMBB

Recommended Pair: JVB3300




**JBS160**  
**GE 30" RANGE**

- 5.0 cu. ft. oven capacity
- Standard-clean oven
- Sensi-Temp Technology
- Dual-element bake
- Removable full-width storage drawer

□ White - JBS160DMWW  
■ Black - JBS160DMBB

Recommended Pair: JVB3300




**JB258**  
**GE 30" RANGE**

- **5.3 cu. ft. oven capacity**
- **Self-clean oven**
- Sensi-Temp Technology
- Dual-element bake
- Removable full-width storage drawer

■ Stainless - JB258RMSS  
□ White - JB258DMWW  
■ Black - JB258DMBB

Recommended Pair: JVM3160



**JB256**  
**GE 30" RANGE**

- **5.0 cu. ft. oven capacity**
- **Self-clean oven**
- Sensi-Temp Technology
- Dual-element bake
- Removable full-width storage drawer

■ Stainless - JB256RMSS  
□ White - JB256DMWW  
■ Black - JB256DMBB

Recommended Pair: JVM3160



**JAS640**  
**GE 24" RANGE**

- Front controls
- Ceramic-glass cooktop
- Steam Clean
- Modular backguard
- In-oven broil
- Large window
- Interior oven light
- Storage drawer






■ Stainless - JAS640RMSS

Recommended Pair: JVB3240







Complete features and specifications on pages 354-355.  
See page 297 for Accessibility Requirements.  
See pages 130-131 for free-standing electric range parts & accessories.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

FREE-STANDING ELECTRIC RANGE PARTS & ACCESSORIES



	<b>WB4820881 OR WB48X20862</b> NEVER-SCRUB ROLLER RACK	<b>JXRACK3E</b> SELF-CLEAN OVEN RACKS	<b>WB48X10056G</b> UNIVERSAL BROILER PAN/RACK SET	<b>GE68CC</b> GE ELECTRIC RANGE DRIP BOWLS (4-PACK)	<b>GE68PCS</b> GE ELECTRIC RANGE DRIP BOWLS (4-PACK)
	<ul style="list-style-type: none"><li>• Easily remove even the heaviest dishes with a roller rack that's engineered to glide seamlessly out of the oven</li></ul>	<ul style="list-style-type: none"><li>• 3-pack of racks</li><li>• Fits GE 5.3 cu. ft. free-standing electric ranges</li><li>• 24" H x 17" W x 3/16" D</li></ul>	<ul style="list-style-type: none"><li>• Two-piece, porcelain-coated broiler pan set</li><li>• Use for steaks, seafood, vegetables and more</li><li>• Dishwasher-safe</li><li>• 12-3/4" x 16-1/2"</li></ul>	<ul style="list-style-type: none"><li>• Fits most Hotpoint® and GE electric ranges</li><li>• Gives electric ranges a like-new appearance</li><li>• Includes two 6" and two 8" replacement pans</li><li>• Satin-chrome finish</li></ul>	<ul style="list-style-type: none"><li>• Fits most Hotpoint and GE electric ranges</li><li>• Gives electric ranges a like-new appearance</li><li>• Includes two 6" and two 8" replacement pans</li><li>• Porcelain finish</li></ul>
<b>MODEL</b>					
<b>PB965</b>	OPTIONAL UPGRADE (WB48X20862)	—	OPTIONAL UPGRADE	—	—
<b>PB935</b>	OPTIONAL UPGRADE (WB4820881)	—	OPTIONAL UPGRADE	—	—
<b>JBS86</b>	—	—	OPTIONAL UPGRADE	—	—
<b>JB735</b>	OPTIONAL UPGRADE (WB48X20881)	—	OPTIONAL UPGRADE	—	—
<b>JB655</b>	OPTIONAL UPGRADE (WB48X20881)	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB645</b>	OPTIONAL UPGRADE (WB48X20881)	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB625</b>	OPTIONAL UPGRADE (WB48X20881)	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JBS60</b>	—	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB480</b>	—	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JBS460</b>	—	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB258</b>	—	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JB256</b>	—	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JBS360</b>	—	—	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JBS160</b>	—	—	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JAS640</b>	—	—	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT



	<b>WX09X10006—4' LENGTH, 40-AMP</b> 3-WIRE ELECTRICAL RANGE CORD	<b>WX09X10035—4' LENGTH, 40-AMP</b> 4-WIRE ELECTRICAL RANGE CORD	<b>WB30X31057—8" SENS-TEMP COIL</b>	<b>WB30X31058—6" SENS-TEMP COIL</b>
	<ul style="list-style-type: none"><li>• 99.9% pure copper for optimal performance</li><li>• Reinforced stamped brass plug blades reduce breakage and bending</li><li>• Ring terminals provide dependable, secure installation</li><li>• Space-saving, right-angle plug design gets range closer to the wall</li><li>• Not reconditioned or repackaged</li></ul>	<ul style="list-style-type: none"><li>• 99.9% pure copper for optimal performance</li><li>• Reinforced stamped brass plug blades reduce breakage and bending</li><li>• Ring terminals provide dependable, secure installation</li><li>• Space-saving, right-angle plug design gets range closer to the wall</li><li>• Not reconditioned or repackaged</li><li>• Other lengths and amps available</li></ul>	<ul style="list-style-type: none"><li>• Same performance as traditional coil element with enhanced safety performance</li><li>• Can replace existing coils, interchangeable</li><li>• Easy to install, no tools required</li></ul>	<ul style="list-style-type: none"><li>• Same performance as traditional coil element with enhanced safety performance</li><li>• Can replace existing coils, interchangeable</li><li>• Easy to install, no tools required</li></ul>
<b>MODEL</b>				
<b>PB965</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>PB935</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JBS86</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB735</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB655</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB645</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB625</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JBS60</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JB480</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—
<b>JBS460</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JB258</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JB256</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JBS360</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JBS160</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	OPTIONAL/REPLACEMENT	OPTIONAL/REPLACEMENT
<b>JAS640</b>	OPTIONAL UPGRADE	OPTIONAL UPGRADE	—	—





# FREE-STANDING GAS RANGES

## FEATURE HIGHLIGHTS



### BUILT-IN WIFI POWERED BY SmarthQ™

Connect, control and manage your oven from anywhere with your smartphone or tablet. Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.



### NO-PREHEAT AIR FRY

With air fry right in the oven, it's easy to cook healthier, crispier foods without the grease. Plus, there's no preheat required.



### EDGE-TO-EDGE COOKTOP

A large, continuous cooking surface gives you extra room for pots and pans of all sizes and lets cookware move easily from burner to burner.



### EXTRA-LARGE, INTEGRATED REVERSIBLE CAST-IRON GRILL/GRIDDLE

Enjoy ultimate cooking versatility. Cook up to six grilled cheeses on the industry's largest integrated griddle, and then flip it over to grill your favorite foods.



### TRI-RING BURNER

Quickly go from gentle simmer to rapid boil with one versatile burner.



### CHEF CONNECT

Three options with a single touch. For instant convenience, choose when to automatically sync clocks and the range burners with the microwave's surface light and vent.



### TRUE CONVECTION WITH PRECISE AIR

Enjoy golden-brown, perfectly even results with a third heating element and a reversing fan that provides enhanced heat and air circulation.



### POWER BOIL BURNER

Prepare foods faster with intense heat that rapidly boils liquids.



### DOUBLE OVEN CAPACITY

Family meals and holiday gatherings are easily conquered with two ovens that offer the largest total capacity in the industry.



FREE-STANDING GAS RANGES




- PGB965**  
**GE PROFILE™ 30" SMART DOUBLE OVEN RANGE WITH CONVECTION**
- No-preheat air fry
  - Upgradeable feature downloads
  - Built-in WiFi powered by SmartHQ™
  - Reversible grill and griddle
  - True Convection
  - Chef Connect\*
  - 3 oven racks
  - Center oval burner
  - Self-clean with Steam Clean
  - Heavy duty, dishwasher-safe grates
  - 20,000-BTU Tri-ring burner
  - Heavy duty, never-scrub rack
  - Precise simmer burner
  - **Large-capacity double oven**
- Fingerprint Resistant Stainless – PGB965YPFS  
■ Black Stainless – PGB965BPTS
- Recommended Pair: PVM9215



- P2B935**  
**GE PROFILE 30" SMART DUAL-FUEL CONVECTION RANGE WITH STORAGE DRAWER**
- No-preheat air fry
  - Upgradeable feature downloads
  - Built-in WiFi powered by SmartHQ
  - Fingerprint Resistant Stainless
  - 20,000-BTU multi-ring burner
  - **Dual Fuel**
  - Extra-large, integrated reversible cast-iron grill/griddle
  - **True Convection with Precise Air**
  - 3 oven racks
  - Center oval burner
- Fingerprint Resistant Stainless – P2B935YPFS
- Recommended Pair: PSA9120




Model shown in Slate



- JGB735**  
**GE 30" CONVECTION RANGE**
- No-preheat air fry
  - Edge-to-edge cooktop
  - Extra-large, integrated non-stick griddle
  - 18,000-BTU Power Boil burner
  - **Gas convection oven**
  - Self-clean with Steam Clean option
  - Center oval burner
  - Heavy-duty, dishwasher-safe grates
  - 5.0 cu. ft. oven capacity
- Stainless – JGB735SPSS  
■ Slate – JGB735EPES  
■ Black Slate – JGB735FPDS  
■ White – JGB735DPWW  
■ Black – JGB735DPBB
- Recommended Pair: JVM6175




Model shown in Slate



- JGB660**  
**GE 30" RANGE**
- **Edge-to-edge cooktop**
  - **18,000-BTU Power Boil burner**
  - **Center oval burner**
  - Extra-large, integrated non-stick griddle
  - Precise Simmer burner
  - Self-clean oven
  - 5.0 cu. ft. oven capacity
  - **Heavy-duty, dishwasher-safe grates**
- Fingerprint Resistant Stainless – JGB660YPFS  
■ Stainless – JGB660SPSS  
■ Slate – JGB660EPES  
■ White – JGB660DPWW  
■ Black – JGB660DPBB
- Recommended Pair: JVM6175



- PGB935**  
**GE PROFILE 30" CONVECTION RANGE WITH STORAGE DRAWER**
- No-preheat air fry
  - Upgradeable feature downloads
  - Built-in WiFi powered by SmartHQ
  - **20,000-BTU Tri-ring burner**
  - **Fingerprint Resistant Stainless**
  - **Extra-large, integrated reversible cast-iron grill/griddle**
  - **True Convection**
  - 3 oven racks
  - Center oval burner
  - Self-clean with Steam Clean option
- Fingerprint Resistant Stainless – PGB935YPFS
- Recommended Pair: PVM9215



- JGBS86**  
**GE 30" DOUBLE OVEN RANGE WITH CONVECTION**
- No-preheat air fry
  - Edge-to-edge cooktop
  - 15,000-BTU Power Boil burner
  - Extra-large, integrated non-stick griddle
  - 10,000-BTU oval burner
  - Steam Clean
  - In-oven broil
  - **Large-capacity double oven**
  - Precise Simmer burner
  - Heavy-duty, dishwasher-safe grates
- Stainless – JGBS86SPSS  
■ Slate – JGBS86EPES
- Recommended Pair: JVM7195



- JGB645**  
**GE 30" RANGE**
- **Two-piece, continuous edge-to-edge cooktop**
  - **15,000-BTU Power Boil burner**
  - Precise Simmer burner
  - Self-clean oven
  - **Heavy-duty, dishwasher-safe grates**
  - 5.0 cu. ft. oven capacity
  - Sealed cooktop burners
- Stainless – JGB645SEKSS
- Recommended Pair: JVM6172



- JGB635**  
**GE 30" RANGE**
- 13,000-BTU burner
  - Black matte steel grates
  - Precise Simmer burner
  - Self-clean oven
  - 5.0 cu. ft. oven capacity
  - Sealed cooktop burners
  - In-oven broil
- Stainless – JGB635REKSS  
■ White – JGB635DEKWW  
■ Black – JGB635DEKBB
- Recommended Pair: JVM3160



\*Chef Connect functionality available only when pairing to compatible over-the-range microwave ovens and hoods. Complete features and specifications on pages 356-359. See pages 138-139 for free-standing gas range parts & accessories. See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**

For definitions of logos, see page 13. The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.




FREE-STANDING GAS RANGES



- JGBS66**  
**GE 30" RANGE WITH BROILER DRAWER**
- Edge-to-edge cooktop
  - Extra-large, integrated non-stick griddle
  - 15,000-BTU Power Boil burner
  - Center oval burner
  - Steam Clean
  - Precise Simmer burner
  - Heavy-cast, dishwasher-safe grates
  - 5.0 cu. ft. oven capacity
  - Sealed cooktop burners

Stainless - JGBS66REKSS  
Slate - JGBS66EEKES  
White - JGBS66DEKWW  
Black - JGBS66DEKBB

Recommended Pair: JVM3160



- JGBS61**  
**GE 30" RANGE**
- Continuous grates
  - 13,000-BTU burner
  - Precise Simmer burner
  - Sealed cooktop burners
  - Black matte steel, cast-iron grates
  - Standard-clean oven
  - 4.8 cu. ft. oven capacity
  - Flexible broiling

Stainless - JGBS61RPSS  
White - JGBS61DPWW  
Black - JGBS61DPBB

Recommended Pair: JVM3160



- JGBS10**  
**GE 30" RANGE WITH BROILER DRAWER**
- 4.8 cu. ft. oven capacity
  - Standard-clean oven
  - Flexible broiling
  - Black gloss steel grates
  - Sealed cooktop burners

White - JGBS10DEMWW  
Black - JGBS10DEMBB

Recommended Pair: JVB3300



Model shown in White



- JGAS640**  
**GE 24" RANGE**
- Front controls
  - Edge-to-edge cooktop with heavy-cast grates
  - In-oven broil
  - Sealed cooktop burners
  - Steam Clean
  - Modular backguard

Stainless - JGAS640RMSS

Recommended Pair: JVB3240



- JGBS60**  
**GE 30" RANGE WITH BROILER DRAWER**
- 13,000-BTU burner
  - Precise Simmer burner
  - Sealed cooktop burners
  - **Black matte steel grates**
  - Standard-clean oven
  - 4.8 cu. ft. oven capacity
  - Flexible broiling
  - Electronic clock and timer

Stainless - JGBS60REKSS  
White - JGBS60DEKWW  
Black - JGBS60DEKBB

Recommended Pair: JVM3160



- JGBS30**  
**GE 30" RANGE**
- 13,000-BTU burner
  - **Big view window**
  - Precise Simmer burner
  - Sealed cooktop burners
  - Black gloss steel grates
  - 4.8 cu. ft. oven capacity






Stainless - JGBS30REKSS  
White - JGBS30DEKWW  
Black - JGBS30DEKBB





Recommended Pair: JVM3160



Complete features and specifications on pages 358-359.  
See pages 138-139 for free-standing gas range parts & accessories.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

FREE-STANDING GAS RANGE PARTS & ACCESSORIES

					
	<b>JXGRILL1/ WB31X24998</b> REVERSIBLE CAST-IRON GRIDDLE/GRILL	<b>WB31X24738</b> NON-STICK ALUMINUM GRIDDLE	<b>JXGRATE1/ WB31X27150</b> CENTER GRATE	<b>JXRACK3G*</b> SELF-CLEAN OVEN RACKS—3 PACK	<b>WB48X20990 OR WB48X21543</b> NEVER-SCRUB ROLLER RACK
	<ul style="list-style-type: none"><li>• Cast iron</li><li>• Interlocks with grates</li><li>• Reversible</li></ul>	<ul style="list-style-type: none"><li>• Heavy-duty, cast-iron construction</li><li>• Interlocks with grates</li></ul>	<ul style="list-style-type: none"><li>• Middle grate</li><li>• Ideal for cooking with odd-sized cookware</li><li>• Accommodates the dual-purpose center burner</li></ul>	<ul style="list-style-type: none"><li>• 3-pack of racks</li><li>• 23" H x 15-1/2" W x 3/16" D</li><li>• Works with both self-clean and Steam Clean settings</li></ul>	<ul style="list-style-type: none"><li>• Easily remove even the heaviest dishes with a roller rack that's engineered to glide seamlessly out of the oven</li></ul>
MODEL					
PGB965	INCLUDED	OPTIONAL UPGRADE	INCLUDED	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
P2B935	INCLUDED	OPTIONAL UPGRADE	INCLUDED	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X20990)
PGB935	INCLUDED	OPTIONAL UPGRADE	INCLUDED	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGBS86	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGB735	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGB660	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGB645	—	—	—	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGB450	—	—	—	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGB635	—	—	—	OPTIONAL/ REPLACEMENT	OPTIONAL UPGRADE (WB48X21543)
JGBS66	OPTIONAL UPGRADE	INCLUDED	OPTIONAL UPGRADE	—	—
JGBS61	—	—	—	—	—
JGBS60	—	—	—	—	—
JGBS30	—	—	—	—	—
JGBS10	—	—	—	—	—
JGAS640	—	—	—	—	—

			
<b>WB48X10056</b> UNIVERSAL BROILER PAN/RACK SET	<b>WB48X5108</b> ROASTING RACK	<b>PM15X113</b> 4' UNIVERSAL GAS RANGE CONNECTION WITH AUTO SHUTOFF KIT	<b>PM15X103</b> 4' UNIVERSAL GAS RANGE INSTALLATION KIT
<ul style="list-style-type: none"><li>• Two piece, porcelain-coated</li><li>• Dishwasher-safe</li><li>• 12-3/4" x 16-1/2"</li></ul>	<ul style="list-style-type: none"><li>• Designed to accompany universal broiler pan (WB48X10056G and WB48X10056)</li><li>• Raised rack design allows juices to flow away from the food</li></ul>	<ul style="list-style-type: none"><li>• Includes step-by-step instructions</li><li>• Helps prevent a hazardous buildup of gas</li><li>• For indoor and outdoor use</li></ul>	<ul style="list-style-type: none"><li>• Fits most major brands</li><li>• For indoor or outdoor use</li><li>• Easy to install</li></ul>
APPLIES TO ALL FREE-STANDING GAS RANGES	APPLIES TO ALL FREE-STANDING GAS RANGES	APPLIES TO ALL FREE-STANDING GAS RANGES	APPLIES TO ALL FREE-STANDING GAS RANGES

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM) BY USING GE PARTS ACCOUNT NUMBER.





# OVER-THE-RANGE OVENS

## FEATURE HIGHLIGHTS

### ADVANTIUM® OVENS




#### SPEEDCOOK OVEN

Impress last-minute dinner guests with Advantium cooking technology that delivers oven-quality results two- to eight-times faster than a conventional oven.



#### MULTIPLE COOKING FUNCTIONS

Expand your cooking versatility with True European Convection, Sensor Microwave, Broil, Warming/Proofing Oven, and Precision Cook Oven options all in one oven.



#### NO PREHEATING REQUIRED

Start cooking as soon as inspiration strikes with powerful halogen bulbs that produce nearly instantaneous heat and eliminate preheating.



#### CUSTOM RECIPE SAVER

Favorite recipes are always close at hand with a feature that allows you to store cooking instructions for up to 30 different dishes.



#### 175+ PREPROGRAMMED MENU SELECTIONS

Quickly find the selection you need with a menu that organizes dishes into 12 convenient categories.



#### BACKLIT CONTROLS

Digital readouts are easy to read and maintain a modern appearance.

### MICROWAVE OVENS



#### SENSOR COOKING CONTROLS

Automatically adjusts time and power for delicious cooking results.



#### AIR FRY

Cook healthier, crispier versions of your favorite foods in less time, thanks to an air fryer built into your microwave..



#### CONVECTION

Choose this setting when baking or browning is desired.

OVER-THE-RANGE OVENS WITH ADVANTIUM® TECHNOLOGY



**PSA9240**  
GE PROFILE™ 1.7 CU. FT. CAPACITY OVEN WITH ADVANTIUM TECHNOLOGY

- **Speedcook oven (240V)**
- Multiple cooking functions
- **True European Convection**
- No preheating required
- Over 175 preprogrammed menu selections
- Custom Recipe Saver
- Backlit controls
- **Speedcooking grill tray**
- Three-speed, 300-CFM venting system


■ Stainless – PSA9240SPSS



**PSA9120**  
GE PROFILE 1.7 CU. FT. CAPACITY OVEN WITH ADVANTIUM TECHNOLOGY

- **Speedcook oven (120V)**
- Multiple cooking functions
- **No preheating required**
- **Over 175 preprogrammed menu selections**
- **Custom Recipe Saver**
- **Backlit controls**
- Three-speed, 300-CFM venting system

■ Stainless – PSA9120SPSS

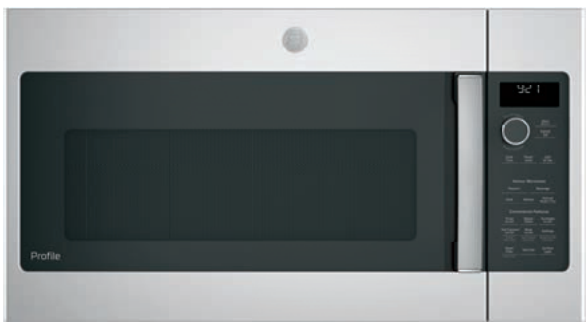

**PVM9215**  
GE PROFILE 2.1 CU. FT. CAPACITY SENSOR OVEN

- 1,000 watts (IEC-705 test procedure)
- Easy-clean interior with steam clean
- **Chef Connect**
- Weight and time defrost
- **LED cooktop lighting**
- **Four-speed with boost, 400-CFM venting system**
- **My Cycle**
- Turntable on/off

■ Stainless – PVM9215SKSS

RECIRCULATING MODEL

■ Stainless – PNM9216SKSS



**PVM9225**  
GE PROFILE 2.1 CU. FT. CAPACITY SENSOR OVEN

- Extendable vent
- Sensor cook/reheat
- 400 CFM
- Chef Connect
- Steam Clean
- LED lighting

■ Stainless – PVM9225SRSS

OVER-THE-RANGE MICROWAVE OVENS



**PVM9179**  
GE PROFILE 1.7 CU. FT. CAPACITY CONVECTION OVEN

- Air Fry
- 950 watts (IEC-705 test procedure)
- **Fast Cook**
- Sensor cooking controls
- Chef Connect
- LED cooktop lighting
- Easy-clean interior with steam clean
- **Convection rack**
- My Cycle


■ Stainless – PVM9179SKSS  
■ Black Stainless – PVM9179BLTS  
■ White – PVM9179DKWW  
■ Black – PVM9179DKBB



**PVM9005**  
GE PROFILE 2.1 CU. FT. CAPACITY SENSOR OVEN

- 1,050 watts (IEC-705 test procedure)
- Chef Connect
- **Bottom control with integrated handle**
- Four-speed, 400-CFM venting system
- 10 power levels
- “Add 30 seconds” button

■ Stainless – PVM9005SJSS  
■ Black Stainless – PVM9005BLTS  
■ Slate – PVM9005EJES

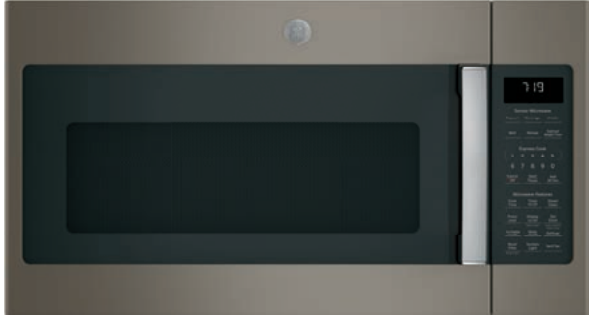

**JVM7195**  
GE 1.9 CU. FT. CAPACITY SENSOR OVEN

- 1,000 watts (IEC-705 test procedure)
- **Easy-clean interior with Steam Clean**
- Melt
- Weight and time defrost
- **Four-speed, 400-CFM venting system**
- Turntable on/off

■ Stainless – JVM7195SKSS  
■ Slate – JVM7195EKES  
■ Black Slate – JVM7195FLDS  
■ White – JVM7195DKWW  
■ Black – JVM7195DKBB

Model shown in Slate

RECIRCULATING MODELS

■ Stainless – JNM7196SKSS  
■ White – JNM7196DKWW  
■ Black – JNM7196DKBB



**JVM6175**  
GE 1.7 CU. FT. CAPACITY SENSOR OVEN

- Fingerprint resistant options
- 1,000 watts (IEC-705 test procedure)
- **Weight and time defrost**
- “Add 30 seconds” button
- Melt
- Two-speed, 300-CFM venting system
- Turntable on/off

■ Stainless – JVM6175SKSS  
■ Fingerprint Resistant Stainless – JVM6175YKFS  
■ Black Stainless – JVM6175BLTS  
■ Slate – JVM6175EKES  
■ White – JVM6175DKWW  
■ Black – JVM6175DKBB

Complete features and specifications on pages 360-363.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by GE Appliances is under license. Other trademarks and trade names are those of their respective owners.



OVER-THE-RANGE MICROWAVE OVENS



- JVM6172**  
**GE 1.7 CU. FT. CAPACITY OVEN**
- 1,000 watts (IEC-705 test procedure)
  - Convenience cooking controls
  - “Add 30 seconds” button
  - Weight and time defrost
  - **Turntable on/off**
  - Two-speed, 300-CFM venting system
  - 10 power levels

■ Stainless – JVM6172SKSS  
□ White – JVM6172DKWW  
■ Black – JVM6172DKBB



- CONTRACT FOCUS**  
**JVM3162**  
**GE 1.6 CU. FT. CAPACITY OVEN**
- 950 watts (IEC-705 test procedure)
  - Convenience cooking controls
  - Auto and time defrost
  - Turntable on/off
  - Two-speed, 300-CFM venting system
  - “Add 30 seconds” button
  - 10 power levels

■ Stainless – JVM3162RJSS  
□ White – JVM3162DJWW  
■ Black – JVM3162DJBB

RECIRCULATING MODELS

■ Stainless – JNM3163RJSS  
□ White – JNM3163DJWW  
■ Black – JNM3163DJBB



- JVM3160**  
**GE 1.6 CU. FT. CAPACITY OVEN**
- **1,000 watts (IEC-705 test procedure)**
  - Convenience cooking controls
  - Auto and time defrost
  - Turntable on/off
  - Two-speed, 300-CFM venting system

■ Stainless – JVM3160RFSS  
■ Slate – JVM3160EFES  
□ White – JVM3160DFWW  
■ Bisque – JVM3160DFCC  
■ Black – JVM3160DFBB

ADVANTIUM® AND MICROWAVE PARTS & ACCESSORIES



	JX36	JX15BUMP
	36" FILLER KIT	15" CABINETRY BUMP OUT KIT
	<ul style="list-style-type: none"><li>• Microwave Filler Kit to allow a standard 30" microwave to fit into a 36" opening</li><li>• Parts included: 2 trim kit side mounts, 2 installation screws, 1 connection bar</li></ul>	<ul style="list-style-type: none"><li>• Wall bracket that extends the unit forward by 3"</li><li>• To be used for any 13"-16" cabinets that are deeper than specified</li><li>• Approximate dimensions are 30"W x 16.25"H x 3"D</li></ul>
MODEL		
PSA9240SPSS	JX36BSS	JX15BUMPBB
PSA9120SPSS	JX36BSS	JX15BUMPBB
PVM9179BLTS	JX36BTS	JX15BUMPBB
PVM9179SKSS	JX36BSS	JX15BUMPBB
PVM9179EKES	JX36BES	JX15BUMPBB
PVM9179DKWW	JX36BWW	JX15BUMPWW
PVM9179DKBB	JX36BBB	JX15BUMPBB
PVM9005BLTS		JX15BUMPBB
PVM9005SJSS		JX15BUMPBB
PVM9005EJES		JX15BUMPBB
PVM9215SKSS	JX36BSS	JX15BUMPBB
PNM9216SKSS	JX36BSS	JX15BUMPBB
JNM7196BLTS	JX36BTS	JX15BUMPBB
JNM7196SKSS	JX36BSS	JX15BUMPBB
JNM7196DKWW	JX36BWW	JX15BUMPWW
JNM7196DKBB	JX36BBB	JX15BUMPBB
JVM7195BLTS	JX36BTS	JX15BUMPBB
JVM7195SKSS	JX36BSS	JX15BUMPBB
JVM7195EKES	JX36BES	JX15BUMPBB
JVM7195DKWW	JX36BWW	JX15BUMPWW
JVM7195DKBB	JX36BBB	JX15BUMPBB
JVM6175BLTS	JX36BTS	JX15BUMPBB
JVM6175SKSS	JX36BSS	JX15BUMPBB
JVM6175EKES	JX36BES	JX15BUMPBB
JVM6175DKWW	JX36BWW	JX15BUMPWW
JVM6175DKBB	JX36BBB	JX15BUMPBB
JVM6172SKSS	JX36BSS	JX15BUMPBB
JVM6172DKWW	JX36BWW	JX15BUMPWW
JVM6172DKBB	JX36BBB	JX15BUMPBB
JNM3163RJSS	JX36BSS	JX15BUMPBB
JNM3163DJWW	JX36BWW	JX15BUMPWW
JNM3163DJBB	JX36BBB	JX15BUMPBB
JVM3162RJSS	JX36BSS	JX15BUMPBB
JVM3162DJWW	JX36BWW	JX15BUMPWW
JVM3162DJBB	JX36BBB	JX15BUMPBB
JNM3161MFSA	JX36B	JX15BUMPBB
JVM3160RFSS	JX36B	JX15BUMPBB
JVM3160EFES	JX36B	JX15BUMPBB
JVM3160DFWW	JX36B	JX15BUMPWW
JVM3160DFCC	JX36B	
JVM3160DFBB	JX36B	JX15BUMPBB



# COUNTERTOP MICROWAVE OVENS

## FEATURE HIGHLIGHTS



### SENSOR COOKING CONTROLS

Automatically adjusts time and power for delicious cooking results.




### CONVECTION/ COMBINATION COOKING

Combines microwave with traditional radiant heat to bake and roast foods with accuracy.



### SPACEMAKER® OVEN

Space-saving design frees up counter space.

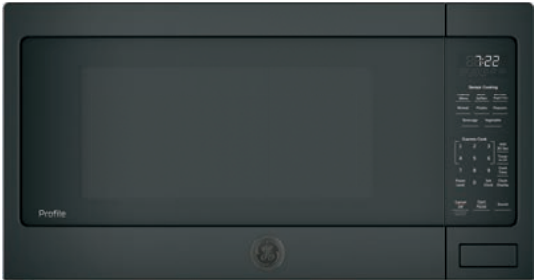

Model shown in Black

### PES7227

#### GE PROFILE™ 2.2 CU. FT. CAPACITY SENSOR OVEN

- 1,100 watts (IEC-705 test procedure)
- Weight and time defrost
- Extra-large 16" turntable
- Instant On controls
- Control lockout
- "Add 30 seconds" button
- Kitchen timer

Stainless - PES7227SLSS  
Black - PES7227DLBB

FOR COUNTERTOP APPLICATION ONLY.  
FOR BUILT-IN ONLY USE PEB7227 - SEE PAGE 83.




### PEB9159

#### GE PROFILE 1.5 CU. FT. CAPACITY COUNTERTOP CONVECTION/MICROWAVE OVEN

- 1,000 watts (IEC-705 test procedure)
- Sensor cooking controls
- Warming oven
- Optional built-in trim kit (JX9152/JX9153)
- Convection rack

Stainless - PEB9159SRSS  
Black - PEB9159DRBB

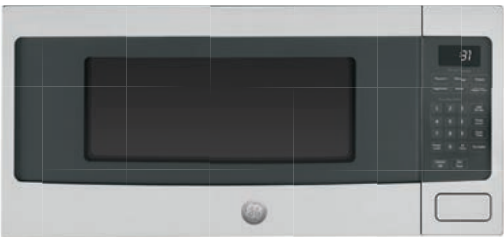

### PEM31

#### GE PROFILE 1.1 CU. FT. CAPACITY SPACEMAKER OVEN

- 800 watts (IEC-705 test procedure)
- Optional built-in trim kit (JX827/JX830)
- Optional hanging kit (JXA019K)
- Sensor cooking controls
- Weight and time defrost
- Turntable on/off

Stainless - PEM31SFSS  
Black Stainless - PEM31BMTS  
White - PEM31DFWV  
Black - PEM31DFBB



### JES2251

#### GE PROFILE 2.2 CU. FT. CAPACITY INVERTER OVEN

- 1,200 watts (IEC-705 test procedure)
- Sensor cooking controls
- Full stainless steel exterior
- Auto and time defrost
- Extra-large 16" turntable
- Instant On controls
- Control lockout

Stainless - JES2251SJSS

\*Only applicable under ADA-compliant installation.  
Complete features and specifications on pages 329-331 and 364.  
See page 297 for Accessibility Requirements. Note: Model can be ADA/UFAS compliant in countertop or built-in configuration.  
For built-in, please see installation information for individual models.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.



COUNTERTOP MICROWAVE OVENS



**JES2051**  
Model shown in Black  
**GE 2.0 CU. FT. CAPACITY SENSOR OVEN**  
• **1,200 watts (IEC-705 test procedure)**  
• Auto and time defrost  
• Extra-large 16” turntable  
• Instant On controls  
• Control lockout  
• Timer on/off

■ Stainless – JES2051SNSS  
□ White – JES2051DNWW  
■ Black – JES2051DNBB



**JES1657**  
**GE 1.6 CU. FT. CAPACITY SENSOR OVEN**  
• **1,150 watts (IEC-705 test procedure)**  
• Weight and time defrost  
• Turntable  
• Instant On controls  
• Control lockout  
• Timer on/off

■ Stainless – JES1657SMSS  
■ Black Stainless – JES1657BMTS  
□ White – JES1657DMWW  
■ Black – JES1657DMBB



**JES1460**  
Model shown in White  
**GE 1.4 CU. FT. CAPACITY SENSOR OVEN**  
• **1,100 watts (IEC-705 test procedure)**  
• Weight and time defrost  
• Turntable  
• Instant On controls  
• Control lockout  
• Timer on/off

□ White – JES1460DSWW  
■ Black – JES1460DSBB



**JES1145**  
**GE 1.1 CU. FT. CAPACITY OVEN**  
• **950 watts (IEC-705 test procedure)**  
• Convenience cooking controls  
• Weight and time defrost  
• Turntable  
• Instant On controls  
• Control lockout  
• Kitchen timer

■ Stainless – JES1145SHSS  
□ White – JES1145DLWW  
■ Black – JES1145DMBB



**JES1109**  
**GE 1.0 CU. FT. CAPACITY COUNTERTOP CONVECTION MICROWAVE OVEN WITH AIR FRY**  
• Air Fry  
• Convection  
• Broil  
• Preset controls  
• 1,050 watts

• Stainless exterior  
• Crisper pan  
• Auto Defrost & Time Defrost

■ Stainless – JES1109RRSS



**JES1097**  
**GE 0.9 CU. FT. CAPACITY SMART OVEN WITH SCAN-TO-COOK TECHNOLOGY**  
• 900 watts (IEC-705 test procedure)  
• Convenience cooking controls  
• Auto and time defrost

• Turntable  
• Control lockout  
• Kitchen timer

■ Stainless – JES1097SMSS



**JES1095**  
Model shown in Black Stainless  
**GE 0.9 CU. FT. CAPACITY OVEN**  
• 900 watts (IEC-705 test procedure)  
• Convenience cooking controls  
• Auto and time defrost  
• Turntable

• Control lockout  
• Kitchen timer

■ Stainless – JES1095SMSS  
■ Black Stainless – JES1095BMTS  
□ White – JES1095DMWW  
■ Black – JES1095DMBB



**JES1072**  
**GE 0.7 CU. FT. CAPACITY OVEN**  
• 700 watts (IEC-705 test procedure)  
• Convenience cooking controls  
• Auto and time defrost  
• Turntable

• Control lockout  
• Kitchen timer  
• Instant On controls

■ Stainless – JES1072SHSS  
□ White – JES1072DMWW  
■ Black – JES1072DMBB



**JEM3072**  
Model shown in White  
**GE 0.7 CU. FT. CAPACITY SPACEMAKER® OVEN**  
• 700 watts (IEC-705 test procedure)  
• **Optional hanging kit\* (JXA019K)**  
• Convenience cooking controls  
• Auto and time defrost

• Turntable  
• Instant On controls  
• Control lockout

■ Stainless – JEM3072SHSS  
□ White – JEM3072DHWW  
■ Black – JEM3072DHBB

Complete features and specifications on pages 364-365.  
\*Optional undercabinet mounting kit sold separately. Refer to page 365 for installation options.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.





# DISHWASHERS



## NICE AND CLEAN

Expect table-ready dishes after every cycle, thanks to a new level of washing and drying power from GE Appliances & GE Profile™. Plus, a wide range of finishes and configurations ensures the right look and fit for any kitchen.



PDP715SBNTS—See pg. 157.



PDT755SYRFS—See pg. 156.



GDP645SYNFS—See pg. 158.



GDP630PGRBB—See pg. 159.



GDT630PMRES—See pg. 158.



GDF535PSRSS—See pg. 160.



GDF645SSNSS—See pg. 160.



UCG1520NSS—See pg. 163.





# BUILT-IN DISHWASHERS


## FEATURE HIGHLIGHTS



**DRY BOOST™**  
Using Dry Boost provides up to three times better drying.\*  
\*Compared to heated dry option.



**DEEP CLEAN SILVERWARE JETS**  
Producing table-ready silverware, powerful jets are directed to the locations where the silverware baskets can be placed.



**TWIN TURBO DRY BOOST™**  
Ensure a complete dry with every cycle, thanks to a dual fan system and inline heater that provide exceptional performance, even with plastics.



**LEAK DEFENSE WITH ACTIVE FLOOD PROTECT**  
Uncommon leaks can be easily detected and contained.



**PIRANHA™ HARD-FOOD DISPOSER WITH REMOVABLE FILTER**  
To ensure consistently clean items, this stainless steel blade rotates at 3,600 RPM to pulverize food particles.




**BOTTLE JETS**  
Hard-to-reach areas inside tall items are now reachable, thanks to dedicated jets integrated into the upper rack that shower water deep inside for the ultimate clean.



**THIRD RACK**  
Easily clean an entire flatware collection, knives and small utensils with a one-piece customizable rack that glides smoothly.



**WASH ZONES**  
Wash a true half-load in either the upper or lower rack without sacrificing options and cycles available on a full wash.



**BUILT-IN WIFI**  
Monitor performance, check status and automatically reorder detergent using your mobile device.  
Visit [geappliances.com/connect](http://geappliances.com/connect) to learn about apps that support this appliance.



BUILT-IN HIDDEN CONTROLS DISHWASHERS



Model shown in Black Stainless




Third Rack included

- PDT785S**  
**GE PROFILE™ STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Twin Turbo Dry Boost™
  - Built-in WiFi powered by SmartHQ™
  - Deep Clean Silverware Jets
  - Leak Defense with Active Flood Protect
  - Bottle Jets
  - **Third Rack**
  - Piranha™ hard-food disposer
  - 1-Hour Wash
  - Steam + Sani
  - 16 place settings
  - **39 dBA**
- Fingerprint Resistant Stainless – PDT785SYNFS  
■ Black Stainless – PDT785SBNTS



Third Rack optional\*\*

- PDT775S**  
**GE PROFILE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- **Twin Turbo Dry Boost**
  - Built-in WiFi powered by SmartHQ
  - Deep Clean Silverware Jets
  - Leak Defense with Active Flood Protect
  - Bottle Jets
  - Piranha hard-food disposer
  - 1-Hour Wash
  - Steam + Sani
  - 16 place settings
  - 42 dBA
- Fingerprint Resistant Stainless – PDT775SYNFS

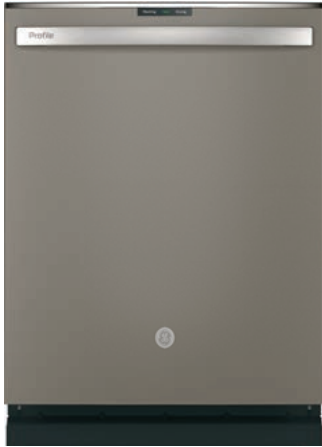

Model shown in Slate



Third Rack included

- PDT715S**  
**GE PROFILE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Dry Boost with Fan Assist
  - **Deep Clean Silverware Jets**
  - Bottle Jets
  - Third Rack
  - Steam + Sani
  - Piranha hard-food disposer
  - Lower rack multi-position, fold-down tines
  - Adjustable full-extension smooth-glide upper rack
  - 16 place settings
  - WiFi optional\*
  - **45 dBA**
- Fingerprint Resistant Stainless – PDT715SYNFS  
■ Black Stainless – PDT715SBNTS  
■ Slate – PDT715SMNES



Third Rack included

- PDP715S**  
**GE PROFILE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Dry Boost with Fan Assist
  - **Deep Clean Silverware Jets**
  - Bottle Jets
  - Third Rack
  - Steam + Sani
  - Piranha hard-food disposer
  - Lower rack multi-position, fold-down tines
  - Adjustable full-extension smooth-glide upper rack
  - 16 place settings
  - WiFi optional\*
  - **45 dBA**
- Fingerprint Resistant Stainless – PDP715SYNFS  
■ Black Stainless – PDP715SBNTS




Third Rack included

- PDT755S**  
**GE PROFILE ULTRAFRESH SYSTEM™ DISHWASHER WITH MICROBAN® ANTIMICROBIAL TECHNOLOGY**
- **Microban® Antimicrobial Technology**
  - **UltraFresh System**
  - Steam + Sani
  - Dry Boost™ with Fan Assist
  - **Built-In WiFi powered by SmartHQ**
  - Deep Clean Silverware Jets
  - Built-In Third Rack
  - Bottle Wash Jets
  - Active Flood Protect
  - **42 dBA**
- Fingerprint Resistant Stainless – PDT755SYRFS



Third Rack included

- PDP755S**  
**GE PROFILE ULTRAFRESH SYSTEM DISHWASHER WITH MICROBAN ANTIMICROBIAL TECHNOLOGY**
- **Microban Antimicrobial Technology**
  - **UltraFresh System**
  - Steam + Sani
  - Dry Boost with Fan Assist
  - **Built-In WiFi powered by SmartHQ**
  - Deep Clean Silverware Jets
  - Built-In Third Rack
  - Bottle Wash Jets
  - Active Flood Protect
  - **42 dBA**
- Fingerprint Resistant Stainless – PDP755SYRFS

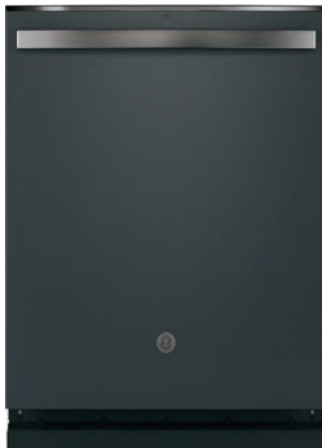

Model shown in Black Slate



Third Rack included

- GDT665S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Dry Boost with Fan Assist
  - Bottle Jets
  - **Third Rack**
  - Steam + Sani
  - 1-Hour Wash
  - **Adjustable full-extension smooth-glide upper rack**
  - AutoSense Cycle
  - 16 place settings
  - WiFi optional\*
  - 46 dBA
- Stainless – GDT665SSNSS  
■ Slate – GDT665SMNES  
■ Black Slate – GDT665SFNDS  
■ White – GDT665SGNWW  
■ Black – GDT665SGNB



Third Rack included

- GDP665S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Dry Boost with Fan Assist
  - Bottle Jets
  - **Third Rack**
  - Steam + Sani
  - 1-Hour Wash
  - **Adjustable full-extension smooth-glide upper rack**
  - AutoSense Cycle
  - 16 place settings
  - WiFi optional\*
  - 46 dBA
- Fingerprint Resistant Stainless – GDP665SYNFS

See page 297 for Accessibility Requirements.  
Complete features and specifications on pages 366-369.

**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*SmartHQ Connect Module is required and sold separately. It is available for order on [geappliances.com](http://geappliances.com), part number PBX23W00Y0.  
\*\*Optional Third Rack sold separately. See page 167.

BUILT-IN HIDDEN CONTROLS DISHWASHERS



- GDT645S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Dry Boost™ with Fan Assist
  - **Bottle Jets**
  - Wash zones
  - Steam + Sani
  - 1-Hour Wash
  - Manual + adjustable upper rack
  - Piranha™ hard-food disposer
  - AutoSense Cycle
  - 16 place settings
  - WiFi optional\*
  - 48 dBA
- Fingerprint Resistant Stainless – GDT645SYNFS
  - Stainless – GDT645SSNSS
  - Slate – GDT645SMNES
  - White – GDT645SGNWW
  - Black – GDT645SGNB



- GDP645S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- Dry Boost with Fan Assist
  - **Bottle Jets**
  - Wash zones
  - Steam + Sani
  - 1-Hour Wash
  - Manual + adjustable upper rack
  - Piranha hard-food disposer
  - AutoSense Cycle
  - 16 place settings
  - WiFi optional\*
  - 48 dBA
- Fingerprint Resistant Stainless – GDP645SYNFS




- GDP630P**  
**GE TOP CONTROL WITH PLASTIC INTERIOR DISHWASHER WITH SANITIZE CYCLE & DRY BOOST**
- **Third Rack**
  - **Bottle Jets**
  - Dry Boost
  - Active Flood Protect
  - **Smooth Touch Controls**
  - **Wash zones**
  - Steam + Sani
  - AutoSense Cycle
  - WiFi optional\*
  - **50 dBA**
- Fingerprint Resistant Stainless – GDP630PYRFS
  - Slate – GDP630PMRES
  - White – GDP630PGRWW
  - Black – GDP630PGRBB




- GDT550P**  
**GE TOP CONTROL WITH PLASTIC INTERIOR DISHWASHER WITH SANITIZE CYCLE & DRY BOOST**
- Dry Boost
  - Steam + Sani
  - **AutoSense Cycle**
  - **Manual + adjustable Upper Rack**
  - Reliable performance
  - Active Flood Protect
  - **52 dBA**
  - Third Rack optional
- Fingerprint Resistant Stainless – GDT550PYRFS
  - Slate – GDT550PMRES
  - White – GDT550PGRWW
  - Black – GDT550PGRBB


Model shown in Slate



- GDT635H**  
**GE TOP CONTROL WITH PLASTIC INTERIOR DISHWASHER WITH SANITIZE CYCLE & DRY BOOST**
- **Built-in WiFi powered by SmartHQ™**
  - Dry Boost
  - Active Flood Protect
  - Smooth Touch Controls
  - Steam + Sani
  - Reliable performance
  - Wash zones
  - 50 dBA
  - Third Rack optional
- Stainless – GDT635HSRSS

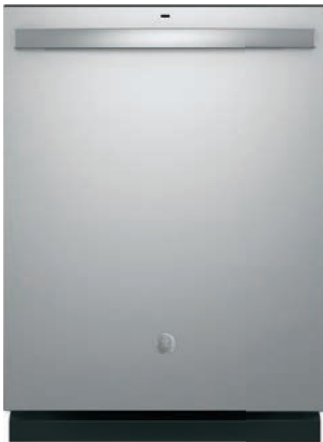

- GDT630P**  
**GE TOP CONTROL WITH PLASTIC INTERIOR DISHWASHER WITH SANITIZE CYCLE & DRY BOOST**
- **Third Rack**
  - **Bottle Jets**
  - Dry Boost
  - Active Flood Protect
  - **Smooth Touch Controls**
  - **Wash zones**
  - Steam + Sani
  - AutoSense Cycle
  - WiFi optional\*
  - **50 dBA**
- Fingerprint Resistant Stainless – GDT630PYRFS
  - Slate – GDT630PMRES
  - White – GDT630PGRWW
  - Black – GDT630PGRBB



- GDT535P**  
**GE TOP CONTROL WITH PLASTIC INTERIOR DISHWASHER WITH SANITIZE CYCLE & DRY BOOST**
- Reliable Performance
  - Dry Boost
  - **Steam+Sani**
  - Active Flood Protect
  - 1-Hour Wash
  - Piranha hard-food disposer
  - Cabinet-depth flush install
  - WiFi optional\*
  - **55 dBA**
- Stainless – GDT535PSRSS
  - White – GDT535PGRWW
  - Black – GDT535PGRBB




Complete features and specifications on pages 368-369.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*SmartHQ Connect Module is required and sold separately.  
It is available for order on geappliances.com, part number PBX23W00Y0.  
\*\*Optional Third Rack sold separately. See page 167.



BUILT-IN FRONT CONTROL DISHWASHERS

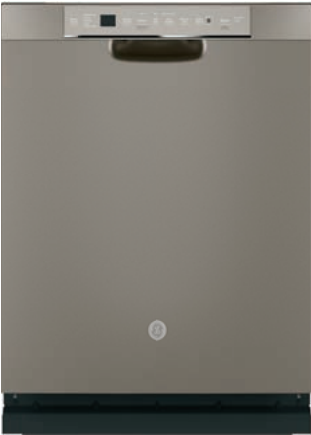

Model shown in Slate



- GDF645S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- **Dry Boost™ with Fan Assist**
  - **Bottle Jets**
  - **Wash zones**
  - Steam + Sani
  - 1-Hour Wash
  - Manual + adjustable upper rack
  - Piranha™ hard-food disposer
  - AutoSense Cycle
  - 16 place settings
  - WiFi optional\*
  - **48 dBA**
- Stainless – GDF645SSNSS  
■ Slate – GDF645SMNES



Model shown in Black



Third Rack optional\*\*

- GDF550P**  
**GE FRONT CONTROL WITH PLASTIC INTERIOR DISHWASHER WITH SANITIZE CYCLE & DRY BOOST**
- Dry Boost
  - Steam + Sani
  - **AutoSense Cycle**
  - **Manual + adjustable Upper Rack**
  - Reliable performance
  - Active Flood Protect
  - WiFi optional\*
  - **52 dBA**
  - Third Rack optional
- Stainless – GDF550PSRSS  
■ Slate – GDF550PMRES  
■ White – GDF550PGRWW  
■ Black – GDF550PGRBB



Model shown in White




- GDF450P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**
- **Heavy Wash with Dry Boost**
  - Normal Wash with Heated Dry
  - Active Flood Protect
  - Piranha hard-food disposer
  - 1-Hour Wash
  - Cabinet-depth flush install
  - Built-up-floor capable
  - **WiFi optional\***
  - **60 dBA**
- Stainless – GDF450PSRSS  
■ White – GDF450PGRWW  
■ Black – GDF450PGRBB



Model shown in Black



- GSD2100V**  
**GE PLASTIC INTERIOR DISHWASHER**
- 2-level wash system
  - 2-stage filtration with extra-fine filter
  - Piranha hard-food disposer
  - Hot Start option
  - Rinse only
  - Short wash
  - 5 cycles/2 options
  - Up to 12-place-setting capacity racking
  - **64 dBA**
- White – GSD2100VWW  
■ Bisque – GSD2100VCC  
■ Black – GSD2100VBB

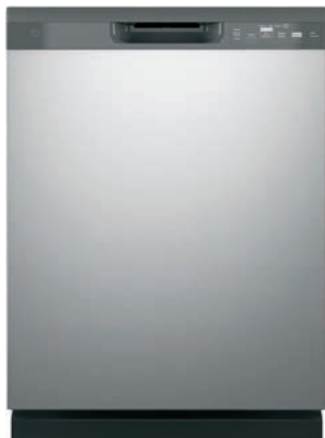

- GDF535P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**
- Dry Boost
  - **Steam + Sani**
  - Active Flood Protect
  - Piranha hard-food disposer
  - 1-Hour Wash
  - Heavy Wash
  - Cabinet-depth flush install
  - WiFi optional\*
  - **55 dBA**
- Stainless – GDF535PSRSS  
■ White – GDF535PGRWW  
■ Bisque – GDF535PGRCC  
■ Black – GDF535PGRBB



Model shown in White



- GDF510P**  
**GE PLASTIC INTERIOR SMART DISHWASHER**
- **Dry Boost**
  - Active Flood Protect
  - Piranha hard-food disposer
  - 1-Hour Wash
  - Heavy Wash
  - Cabinet-depth flush install
  - Built-up-floor capable
  - WiFi optional\*
  - **59 dBA**
- Stainless – GDF510PSRSS  
■ White – GDF510PGRWW  
■ Black – GDF510PGRBB  
■ Stainless – GDF511PSRSS (with power cord)  
■ White – GDF511PGRWW (with power cord)  
■ Black – GDF511PGRBB (with power cord)

Complete features and specifications on pages 370-372.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*SmartHQ™ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.  
\*\*Optional Third Rack sold separately. See page 167.

GE SPACEMAKER® DISHWASHERS



Model shown in White

- GSM2200V**  
**GE PLASTIC INTERIOR UNDER-THE-SINK DISHWASHER**
- Spacemaker upper rack
  - 2-stage filtration with extra-fine filter
  - Piranha™ hard-food disposer
  - Hot Start option
  - Deluxe silverware basket
  - 64 dBA
- Stainless – GSM2260VSS  
■ White – GSM2200VWW  
■ Black – GSM2200VBB



- GDT226S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- ADA compliant with low-profile installation
  - 3-level wash
  - AutoSense Cycle
  - Piranha hard-food disposer with removable filter
  - Sanitize option (NSF 184 Certified)
  - WiFi optional\*
  - 51 dBA
- Stainless – GDT226SSLSS  
■ White – GDT226SGLWW  
■ Black – GDT226SGLBB  
Panel-ready – GDT226SILII

PORTABLE DISHWASHERS



- PDT145S**  
**GE PROFILE™ 18" BUILT-IN SMART DISHWASHER**
- ADA compliant
  - 3-level wash
  - AutoSense Cycle
  - Piranha hard-food disposer with removable filter
  - WiFi optional\*
  - 47 dBA
- Stainless – PDT145SSLSS  
■ White – PDT145SGLWW  
■ Black – PDT145SGLBB



- GPT225S**  
**GE STAINLESS INTERIOR PORTABLE SMART DISHWASHER**
- AutoSense Cycle
  - Piranha hard-food disposer with removable filter
  - Sanitize option (NSF 184 Certified)
  - 3-level wash
  - WiFi optional\*
  - 54 dBA
- Stainless – GPT225SSLSS  
■ White – GPT225SGLWW  
■ Black – GPT225SGLBB



- GDT226SILII**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- ADA compliant with low-profile installation
  - 3-Level Wash
  - AutoSense Cycle
  - Piranha hard-food disposer with removable filter
  - Sanitize Option (NSF 184 Certified)
  - WiFi option\*
  - 51 dBA

Custom Panel – GDT226SILII



- GDT225S**  
**GE STAINLESS STEEL INTERIOR SMART DISHWASHER**
- ADA compliant
  - 3-level wash
  - AutoSense Cycle
  - Piranha hard-food disposer with removable filter
  - WiFi optional\*
  - 51 dBA
- Stainless – GDT225SSLSS  
■ White – GDT225SGLWW  
■ Black – GDT225SGLBB



- GPT145S**  
**GE STAINLESS INTERIOR PORTABLE SMART DISHWASHER**
- AutoSense Cycle
  - Piranha hard-food disposer with removable filter
  - Sanitize option (NSF 184 Certified)
  - 3-level wash
  - WiFi optional\*
  - 52 dBA
- Stainless – GPT145SSLSS

COMPACTOR



- UCG1520N**  
**BUILT-IN COMPACTOR**
- Hidden controls
  - Built-in only
  - 1.4 cu. ft. capacity
  - 1/3 HP
  - Removable key lock
  - Toe pedal opener
  - Reduces volume by 75%
- Stainless – UCG1520NSS  
■ White – UCG1500NWW  
■ Black – UCG1500NBB  
Custom Panel – UCG1510NII

Complete features and specifications on pages 372-375.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

NSF (National Sanitation Foundation)  
\*SmartHQ™ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.





# DISPOSERS

## FEATURE HIGHLIGHTS



**POWER GRINDING MOTOR**  
Quickly hits max speed and high torque so foods are less likely to jam or clog.



**STAINLESS STEEL GRINDING BLADES AND TURNTABLE**  
Made with heavy-duty steel to last for years.



**SEPTIC SAFE**  
Guaranteed to be safe for your septic system.

## DISPOSERS



**GFC1020N**  
**GE CONTINUOUS-FEED DISPOSER**

- Power Grinding 1 HP motor
- Over 2,800 RPM
- Easy Mount Installation
- 3-bolt-mount adapter kit Included
- Drain-Boost technology
- Stainless steel grinding components
- Optional accessory power cord sold separately (model WC12X10002)



**GFC720N**  
**GE CONTINUOUS-FEED DISPOSER**

- Power Grinding 3/4 HP motor
- Over 2,700 RPM
- Easy Mount Installation
- 3-bolt-mount adapter kit Included
- Drain-Boost technology
- Stainless steel grinding components
- Optional accessory power cord sold separately (model WC12X10002)



**GFC530N**  
**GE CONTINUOUS-FEED DISPOSER**

- Power Grinding 1/2 HP motor
- Over 2,600 RPM
- Easy Mount Installation
- 3-bolt-mount adapter kit Included
- Drain-Boost technology
- **Stainless steel grinding components**
- Optional accessory power cord sold separately (model WC12X10002)



**GFC520N**  
**GE CONTINUOUS-FEED DISPOSER**

- Power Grinding 1/2 HP motor
- Over 2,600 RPM
- Easy Mount Installation
- 3-bolt-mount adapter kit Included
- Drain-Boost technology
- Galvanized steel grinding blades
- Optional accessory power cord sold separately (model WC12X10002)

**GFC535N**  
Similar to GFC530N with attached power cord.

**GFC525N**  
Similar to GFC520N with attached power cord.



**GREEN05P**  
**GE CONTINUOUS-FEED DISPOSER**

- Power Grinding 1/2 HP motor
- Over 2,600 RPM
- 3-bolt-mount design
- Attached power cord
- Simple, easy install for homeowners
- High-power, finer grind
- Jam-free guarantee\*
- Stainless steel grinding components



**GFC320N**  
**GE CONTINUOUS-FEED DISPOSER**

- Power Grinding 1/3 HP motor
- Over 2,300 RPM
- Easy Mount Installation
- 3-bolt-mount adapter kit Included
- Drain-Boost technology
- Galvanized steel grinding blades
- Optional accessory power cord sold separately (model WC12X10002)

**GFC325N**  
Similar to GFC320N with attached power cord.



**GFB760N**  
**GE BATCH-FEED DISPOSER**

- Power Grinding 3/4 HP motor
- Over 2,700 RPM
- Magnetic sink stopper for activation
- Easy Mount Installation
- 3-bolt-mount adapter kit Included
- Drain-Boost technology
- Stainless steel grinding components
- Optional accessory power cord sold separately (model WC12X10002)


**Note:** For all corded models an optional accessory 3-bolt-mount adapter kit (PM3X214) is sold separately.

\*Applies when used according to owner's manual. Complete features and specifications on page 375.  
**Bold = feature upgrade from previous model.**

DISHWASHER PARTS & ACCESSORIES



	PM28X329	PM28X326—6’ WX28X327—12’	WX09X70911—7.9’ WX09X70910—5.4’	WD24X10065	WX28X329	WX28X321
	6’ UNIVERSAL DISHWASHER INSTALLATION KIT	UNIVERSAL DISHWASHER CONNECTOR KIT WITH ADAPTER	UNIVERSAL 3-PRONG POWER CORD FOR BUILT-IN DISHWASHERS	12’ DISHWASHER DRAIN HOSE	DISHWASHER GARDEN HOSE ELBOW	10’ DISHWASHER DRAIN HOSE
	<ul style="list-style-type: none"><li>• Safely installs any dishwasher</li><li>• Includes universal 3-wire power cord and 6’ connector</li><li>• UL® listed</li></ul>	<ul style="list-style-type: none"><li>• Braided polymer for superior bursting strength and chemical resistance</li><li>• Includes garden hose connector</li><li>• Fits most major brands of dishwashers</li></ul>	<ul style="list-style-type: none"><li>• Universal design fits most major brands</li><li>• Includes all needed hardware for installation</li><li>• UL listed</li></ul>	<ul style="list-style-type: none"><li>• Fast installation for dishwasher within 12 ft. of drain/water access</li></ul>	<ul style="list-style-type: none"><li>• 3/8” compression x 3/4” garden hose 90° elbow to connect water supply</li></ul>	<ul style="list-style-type: none"><li>• Please search by your appliance model number to ensure this part will fit your appliance</li><li>• Small-port 10-ft. drain hose / 10-ft. universal connector kit</li><li>• 10-ft. drain hose: For standard tub dishwashers</li><li>• Easy installation for dishwasher within 10-ft. of drain/water access</li></ul>
MODEL						
PDT785S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
PDT775S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
PDT755S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
PDP755S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
PDT715S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
PDP715S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT665S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDP665S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT645S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDP645S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT635H	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDP630P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT630P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT550P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT535P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF645S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF550P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF535P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF510P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDF450P	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GSD2100V	OPTIONAL	OPTIONAL	OPTIONAL	—	OPTIONAL	OPTIONAL
GSM2200V	OPTIONAL	OPTIONAL	OPTIONAL	—	OPTIONAL	OPTIONAL
GDT225S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
PDT145S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GPT225S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT145S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—
GDT226S	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	—

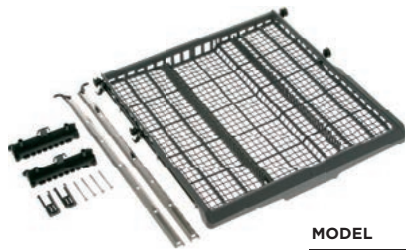

GPF3RACK	
DISHWASHER THIRD-RACK ACCESSORY KIT	
<ul style="list-style-type: none"><li>• Learn how to easily install the third-rack accessory kit in your plastic tub dishwasher</li><li>• For select plastic tub dishwashers only</li><li>• Upgrade your standard two-rack dishwasher with a third rack</li><li>• Easily clean an entire flatware collection, knives and small utensils with an additional rack across the top of the dishwasher</li><li>• GE Appliances Exclusive</li></ul>	
MODEL	
GDT635HSM	OPTIONAL
GDT635HMM	OPTIONAL
GDT635HSR	OPTIONAL
GDT605PSM	OPTIONAL
GDT605PBM	OPTIONAL
GDT605PMM	OPTIONAL
GDT605PFM	OPTIONAL
GDT605PGM	OPTIONAL
GDF530PSM	OPTIONAL
GDF530PMM	OPTIONAL
GDF530PGM	OPTIONAL
GDF550PGR	OPTIONAL
GDF550PMR	OPTIONAL
GDF550PSR	OPTIONAL
GDT550PGR	OPTIONAL
GDT550PMR	OPTIONAL
GDT550PYR	OPTIONAL
PDT775SYN	OPTIONAL
PDT775SBN	OPTIONAL

COMPACTOR / DISPOSER PARTS & ACCESSORIES



	WC12X10002	PM3X214	WC60X5017	WC17X10019, WC17X10011, WC17X10016 (All 3 pieces required)
	UNIVERSAL DISPOSER POWER CORD KIT	3-BOLT-MOUNT ADAPTER KIT	HEAVY-DUTY COMPACTOR BAGS	TOE KICK DOOR ASM SS
	<ul style="list-style-type: none"><li>• Fits most leading brands of disposers</li><li>• 3’ length</li><li>• UL listed</li></ul>	<ul style="list-style-type: none"><li>• Adapter allows mounting an Easy Mount disposer onto an existing 3-bolt-mount system</li><li>• Includes splash guard</li></ul>	<ul style="list-style-type: none"><li>• 12 heavy-duty rectangular compactor bags</li><li>• Made with 50% post-consumer recycled plastic</li></ul>	<ul style="list-style-type: none"><li>• Optional stainless toe kick conversion</li></ul>
MODEL				
GFC1020N	OPTIONAL	INCLUDED	—	—
GFC720N	OPTIONAL	INCLUDED	—	—
GFC530N	OPTIONAL	INCLUDED	—	—
GFC535N	INCLUDED	OPTIONAL	—	—
GREEN05P	INCLUDED	INCLUDED	—	—
GFC520N	OPTIONAL	INCLUDED	—	—
GFC525N	INCLUDED	OPTIONAL	—	—
GFC320N	OPTIONAL	INCLUDED	—	—
GFC325N	INCLUDED	OPTIONAL	—	—
GFB760N	OPTIONAL	INCLUDED	—	—
UCG1600L	—	—	—	—
UCG1680L	—	—	—	—

UL is a registered trademark of Underwriters Laboratories, Inc.

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM).





CLOTHES CARE



# LAUNDRY MADE BETTER

Washers and dryers from GE Appliances are loaded with features that make laundry day easier. The UltraFresh Vent System with OdorBlock™, SmartDispense™ and Sensor Dry™ simplify every step, while new finishes like Sapphire Blue and Satin Nickel add a perfect touch of color to the laundry room.



GEFW650SPNSN & GFD65ESPNSN—See pg. 174.



NEW Sapphire Blue finish—See pg. 174.



NEW Satin Nickel finish—See pg. 174.



GUD27GSPMDG/GUD27ESPMDG—See pg. 185.



GTW465ASNWW & GTD42EASJWW—See pg. 182.



GFT14ESSMWW & GFW148SSMWW—See pg. 177.



GEFW650SSNWW & GFD65ESSNWW—See pg. 174.





# FRONT LOAD CLOTHES CARE

## FEATURE HIGHLIGHTS



### ULTRAFRESH VENT SYSTEM WITH ODORBLOCK™

The first and only UltraFresh Vent System with OdorBlock™ eliminates excess moisture to help prevent odors, ensuring your washer stays fresh and clean.



### MICROBAN® ANTIMICROBIAL TECHNOLOGY

Built into components including the gasket, dispenser and draining system, delivering protection that lives on load after load.



### SMARTDISPENSE™ TECHNOLOGY

Save time and make laundry effortless with an intelligent dispenser that holds up to 32 loads of detergent and automatically dispenses the right amount each time.



### 1 STEP WASH + DRY

Wash and dry a small load, eliminating the need to transfer clothes to the dryer.



### BUILT-IN WIFI POWERED BY SmarthQ™\*

Start, stop and monitor your laundry from anywhere while receiving real-time notifications and updates.



### DYNAMIC BALANCING TECHNOLOGY

Our patented, time-saving technology senses and re-balances uneven loads during the spin cycle, providing a quiet wash.



### REVERSIBLE DOOR

Easily reverse your washer and dryer doors for superior installation flexibility.



### WASHER LINK

Wirelessly links your washer to your dryer so you only choose a setting once.



### POWERSTEAM

Refresh small loads and dewrinkle larger loads with the power of steam.



FRONT LOAD CLOTHES CARE



- GE 5.0 CU. FT. CAPACITY SMART WASHER WITH STEAM**
- UltraFresh Vent System with OdorBlock™
  - SmartDispense™ Technology
  - **1 Step Wash + Dry**
  - Built-In WiFi powered by SmartHQ™
  - Dynamic Balancing Technology (dBT™)
  - Reversible door
  - Sanitize + Allergen
  - Quick Wash
- Sapphire Blue - GFW850SPNRS  
□ White - GFW850SSNWW

Matching Dryer: GFD85ES/GS  
Shown with optional pedestal: GFP1528PNRS, GFP1528SNWW.  
7" Riser also available: GFR0728PNRS, GFR0728SNWW




- GE 7.8 CU. FT. CAPACITY SMART DRYER WITH STEAM**
- **Stainless steel drum**
  - **Washer Link**
  - Steam Refresh
  - Built-In WiFi powered by SmartHQ
  - Quick Dry
  - Reduce Static
  - Sanitize cycle
  - Vent sensor
- Sapphire Blue - GFD85ESPNRS (Electric)  
■ Sapphire Blue - GFD85GSPNRS (Gas)  
□ White - GFD85ESSNWW (Electric)  
□ White - GFD85GSSNWW (Gas)

Matching Washer: GFW850S  
Shown with optional pedestal: GFP1528PNRS, GFP1528SNWW.  
7" Riser also available: GFR0728PNRS, GFR0728SNWW



- GE 4.8 CU. FT. CAPACITY SMART WASHER**
- UltraFresh Vent System with OdorBlock
  - Built-In WiFi powered by SmartHQ
  - Time Saver
  - Dynamic Balancing Technology (dBT)
  - Reversible door
  - True 32" closet depth
  - Quick Wash
  - Sanitize Cycle with Oxi
- White - GFW550SSNWW

Matching Dryer: GFD55ES/GS, GFV55ES  
Shown with optional pedestal: GFP1528SNWW.  
7" Riser also available: GFR0728SNWW



- GE 7.8 CU. FT. CAPACITY SMART DRYER**
- Built-In WiFi powered by SmartHQ
  - Quick Dry
  - Sanitize cycle
  - Wrinkle Care
  - Sensor Dry
  - Damp Alert
  - Vent sensor
  - Simplified 4-way venting
- White - GFD55ESSNWW (Electric)  
□ White - GFD55GSSNWW (Gas)

**GEV55—LONG-VENT MODEL**  
Similar to GFD55ESSN with up to 200-ft. venting capability.  
□ White - GFV55ESSNWW (Electric)

Matching Washer: GFW510SCN, GFW550S  
Shown with optional pedestal: GFP1528SNWW.  
7" Riser also available: GFR0728SNWW



- GE 4.8 CU. FT. CAPACITY SMART WASHER WITH STEAM**
- UltraFresh Vent System with OdorBlock
  - **SmartDispense Technology**
  - Built-In WiFi powered by SmartHQ
  - Dynamic Balancing Technology (dBT)
  - Reversible door
  - **Sanitize + Allergen**
  - Quick Wash
  - True 32" closet depth
- Satin Nickel - GFW650SPNSN  
□ White - GFW650SSNWW

Matching Dryer: GFD65ES/GS  
Shown with optional pedestal: GFP1528PNSN, GFP1528SNWW.  
7" Riser also available: GFR0728PNSN, GFR0728SNWW



- GE 7.8 CU. FT. CAPACITY SMART DRYER WITH STEAM**
- **Steam Refresh**
  - Built-In WiFi powered by SmartHQ
  - Quick Dry
  - **Reduce Static**
  - Sanitize cycle
  - Wrinkle Care
  - Damp Alert
  - Vent sensor
- Satin Nickel - GFD65ESPNSN (Electric)  
■ Satin Nickel - GFD65GSPNSN (Gas)  
□ White - GFD65ESSNWW (Electric)  
□ White - GFD65GSSNWW (Gas)

Matching Washer: GFW650S  
Shown with optional pedestal: GFP1528PNSN, GFP1528SNWW.  
7" Riser also available: GFR0728PNSN, GFR0728SNWW



- CONTRACT ONLY**  
**GE 4.5 CU. FT. CAPACITY SMART WASHER**
- UltraFresh Vent System with OdorBlock
  - Built-In WiFi powered by SmartHQ
  - Dynamic Balancing Technology (dBT)
  - Reversible door
  - True 32" closet depth
  - Quick Wash
  - 10-year warranty
  - Sanitize Cycle with Oxi
- White - GFW510SCNWW

Matching Dryer: GFD55ES/GS, GFV55ES  
Shown with optional pedestal: GFP1528SNWW.  
7" Riser also available: GFR0728SNWW





FRONT LOAD COMBINATION WASHER & DRYER



- GFQ14E**  
**GE 24" 2.4 CU. FT. CAPACITY FRONT LOAD WASHER & CONDENSER DRYER COMBO**
- 2.4 cu. ft. capacity
  - No vent required, standard 120V plug
  - All-In-One Wash & Dry
  - Detergent, bleach and fabric softener dispensers
  - Auto Wash + Dry
  - Steam wash
  - Sanitize cycles
  - Add a Garment
  - ADA compliant with the use of GAF140SSNWW riser
  - WiFi optional\*
- ☐ White - GFQ14ESSNWW




FRONT LOAD WASHER & CONDENSER DRYERS



- GFW148S**  
**GE 2.4 CU. FT. CAPACITY 24" SMART FRONT LOAD WASHER**
- Plugs into dryer or wall
  - Stainless steel basket
  - Steam
  - Electronic touch controls
  - 14 wash cycles
  - 1,400-RPM spin speed
  - WiFi optional\*
  - ADA compliant with the use of GAF140SSNWW riser
- ☐ White - GFW148SSMWW
- Matching Dryers: GFT14ESSM, GFD14ESSN



- GFT14ES**  
**GE 4.1 CU. FT. CAPACITY 24" SMART VENTLESS CONDENSER DRYER**
- Reversible door
  - Stainless steel drum
  - Outlet for washer
  - Sanitize cycle
  - Extended Tumble
  - Can drain to water tank or standpipe
  - WiFi optional\*
  - ADA compliant with the use of GAF140SSNWW riser
- ☐ White - GFT14ESSMWW (Electric)
- Matching Washer: GFW148SSM

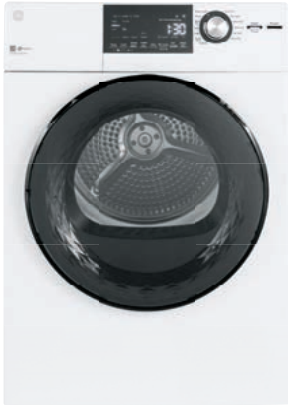

- GFD14ES**  
**GE 4.3 CU. FT. CAPACITY 24" SMART VENTED ELECTRIC DRYER**
- Reversible door
  - Stainless steel drum
  - Outlet for washer
  - Sanitize cycle
  - Extended tumble
  - WiFi optional\*
  - ADA compliant with the use of GAF140SSNWW riser
- ☐ White - GFD14ESSNWW (Electric)
- Matching Washer: GFW148SSM



- GAF140SSNWW**  
**4" RISER AND DRIP PAN FOR 24" FRONT LOAD WASHER AND DRYERS**
- 4" riser that meets ADA standard
  - Easy installation
  - Integrated drip pan
  - Compatible with GFW148/GFT14/GFD14/GFQ14

Complete features and specifications on page 379.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

\*SmarthQ™ Connect Module is required and sold separately. It is available for order on [geappliances.com](http://geappliances.com), part number PBX23W00Y0.





# TOP LOAD CLOTHES CARE

## FEATURE HIGHLIGHTS

### WASHERS




#### SMARTDISPENSE™ TECHNOLOGY

An intelligent dispenser that holds up to 48 loads of detergent and automatically dispenses the right amount, saving you time and making laundry effortless.



#### FLEXDISPENSE™

Automatically releases liquid or powder detergent, fabric softener, and even detergent packs like Tide PODS™, at the right time for faster activation and optimal cleaning performance.



#### POWER PREWASH

Get even the most heavily soiled items perfectly clean in a single cycle that adds detergent, agitates, and soaks, then drains the dirty water and repeats the wash process.



#### WATER STATION

Pre-treat your clothes inside the washer with an integrated water station that dispenses water and detergent together, or just water, all at your desired temperature.



#### BUILT-IN WIFI BY SmartHQ™

Start the washer before your commute home, thanks to the GE Appliances app that lets you monitor and control your laundry pair from anywhere, as well as receive real-time notifications and updates.



#### DEEP FILL

Customize your water levels with just the touch of a button, and fill the tub with as much water as you want so you can wash your way.

### DRYERS



#### STEAM

Dewrinkle and refresh your laundry right in the dryer with innovative built-in steam technology.



#### SENSOR DRY

Prevent over-drying and get more wear out of your clothing, thanks to innovative dual thermistor technology that continually monitors temperature and moisture in the dryer.



#### 120-FT. VENTING CAPABILITY

Maximize your dryer's performance with innovative venting, designed to provide optimal airflow, enhanced drying ability and flexible installation.



TOP LOAD WASHERS & DRYERS



**GTW840C**  
**GE 5.2 CU. FT. CAPACITY SMART STAINLESS STEEL WASHER**

- **SmartDispense™** Technology
- **Power Prewash**
- **Water Station**
- **Built-In WiFi powered by SmartHQ™**
- Efficient infusor
- QuietWash
- Deep Fill
- Multiple rinse options
- Limited 10-year motor warranty

■ Diamond Gray – GTW840CPNDG  
□ White with Silver backsplash – GTW840CSNWS

Matching Dryer: GTD84EC/GC



**GTW845C**  
**GE 5.0 CU. FT. CAPACITY SMART STAINLESS STEEL WASHER**

- **SmartDispense** Technology
- **Power Prewash**
- **Water Station**
- **Built-In WiFi powered by SmartHQ**
- Dual-action agitator
- QuietWash
- Deep Fill
- Multiple rinse options
- Limited 10-year motor warranty

■ Diamond Gray – GTW845CPNDG  
□ White with Silver backsplash – GTW845CSNWS

Matching Dryer: GTD84EC/GC




**GTD84EC/GC**  
**GE 7.4 CU. FT. CAPACITY SMART DRYER WITH STEAM**

- **Steam**
- **Blocked Vent Sensor**
- **Built-In WiFi powered by SmartHQ**
- Sensor Dry
- Up to 120-ft. venting
- Wrinkle Care
- Digital touch control
- My Cycle settings
- Quick Dry

■ Diamond Gray – GTD84ECPNDG (Electric)  
■ Diamond Gray – GTD84GCPNDG (Gas)  
□ White with Silver backsplash – GTD84ECSNWS (Electric)  
□ White with Silver backsplash – GTD84GCSNWS (Gas)

Matching Washers: GTW840CSN, GTW840CPN, GTW845CSN and GTW845CPN

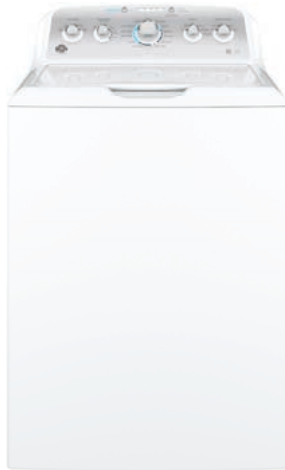

**GTW500A**  
**GE 4.6 CU. FT. CAPACITY STAINLESS STEEL WASHER**

- Stain Pretreat
- DeepClean cycle
- Deep Fill
- Speed Wash
- Deep Rinse
- 2nd Rinse
- Efficient infusor
- 5 soil levels

□ White with Silver backsplash – GTW500ASNWS

Matching Dryer: GTD45EA/GASJ



**GTD45EA/GA**  
**GE 7.2 CU. FT. CAPACITY DRYER**

- **Sensor Dry**
- Up to 120-ft. venting capability
- Aluminized alloy drum
- Extended Tumble
- End-of-cycle signal

□ White with Silver backsplash – GTD45EASJWS (Electric)  
□ White with Silver backsplash – GTD45GASJWS (Gas)

Matching Washers: GTW500ASN, GTW490ACJWS

Complete features and specifications on pages 382-385.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

TOP LOAD WASHERS & DRYERS



**GTW465A**  
**GE 4.5 CU. FT. CAPACITY**  
**STAINLESS STEEL WASHER**

- Deep Fill
- Water level/Load size
- DeepClean cycle
- Speed Wash
- Deep Rinse
- 2nd Rinse
- Auto Soak
- Dual-action agitator

☐ White - GTW465ASNWW

Matching Dryer: GTD42EA/GASJ



**GTD42EA/GA**  
**GE 7.2 CU. FT. CAPACITY DRYER**

- Auto Dry
- Up to 120-ft. venting capability
- Aluminized alloy drum
- **Extended Tumble**
- End-of-cycle signal
- **4 heat selections**

☐ White - GTD42EASJWW (Electric)

☐ White - GTD42GASJWW (Gas)

Matching Washer: GTW465ASN



**GTW335A**  
**GE 4.2 CU. FT. CAPACITY**  
**STAINLESS STEEL WASHER**

- Water level/Load size
- DeepClean cycle
- Large capacity
- Deep Rinse
- Heavy-duty agitator
- Stainless steel basket
- 11 wash cycles
- 6 water temperatures

☐ White - GTW335ASNWW

Matching Dryers: GTD33EA/GASK, GTX33EA/GASK



**GTD33EA/GA**  
**GE 7.2 CU. FT. CAPACITY DRYER**

- Auto Dry
- Up to 120-ft. venting capability
- Aluminized alloy drum
- 3 heat selections
- Rotary electromechanical controls
- Upfront lint filter
- Reverse-a-Door

☐ White - GTD33EASKWW (Electric)

☐ White - GTD33GASKWW (Gas)

**GTX33EA/GASKWW**

Similar to GTD33EA/GASK except 6.2 cu. ft. capacity

Matching Washer: GTW335ASN



**CONTRACT ONLY**

**GTW490A**  
**GE 4.4 CU. FT. CAPACITY**  
**STAINLESS STEEL WASHER**

- **ENERGY STAR**® certified
- **Efficient Infusor**
- **Deep Fill**
- **Stain Pretreat**
- Deep Rinse
- **Auto Soak**
- Speed Wash

☐ White/Silver backslash - GTW490ACJWS

Matching Dryers: GTD45EA/GASJ



**CONTRACT ONLY**

**GTW220A**  
**GE 3.8 CU. FT. CAPACITY**  
**STAINLESS STEEL WASHER**

- Stainless steel basket
- Heavy-duty agitator
- **Precise Fill with 4 wash levels**
- Rotary electronic controls with cycle status lights
- 10 wash cycles
- Deep Rinse

☐ White - GTW220ACKWW

Matching Dryer: GTX22EA/GASK



**CONTRACT ONLY**

**GTX22EA/GA**  
**GE 6.2 CU. FT. CAPACITY DRYER**

- Auto Dry
- Up to 120-ft. venting capability
- Aluminized alloy drum
- 3 heat selections
- Rotary electromechanical controls
- Upfront lint filter
- Reverse-a-Door

☐ White - GTX22EASKWW (Electric)

☐ White - GTX22GASKWW (Gas)

Matching Washer: GTW220ACK

Complete features and specifications on pages 382-385.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

Contract Only Models are included for the Builder Channel only.  
See your Area Sales Manager for details.



STACKABLE/PORTABLE WASHERS/DRYERS



**GNW128P**  
**GE SPACE-SAVING 2.8 CU. FT. CAPACITY PORTABLE WASHER**

- Large capacity
- Small footprint
- Caster wheels included
- Included unicoupler
- Electronic one-touch controls with LED readout
- 8 washer cycles
- 4 wash temperatures
- Stainless steel basket

White – GNW128PSMWW



**GNW128S**  
**GE SPACE-SAVING 2.8 CU. FT. CAPACITY STATIONARY WASHER**

- Large capacity
- Small footprint
- Electronic one-touch controls with LED readout
- 8 washer cycles
- 4 wash temperatures
- Stainless steel basket

White – GNW128SSMWW



**DSKP333EC**  
**GE 120V PORTABLE DRYER 3.6 CU. FT. CAPACITY**

- 3 dry cycles
- 3 heat selections
- Dura Drum interior
- Quiet-by-Design

White – DSKP333ECWW



**DSKS433EB**  
**GE 240V STATIONARY DRYER 3.6 CU. FT. CAPACITY**

- Auto Dry
- **4 heat selections**
- 3 dry cycles
- Rotary controls
- Upfront lint filter

White – DSKS433EBWW



**DSKS333EC**  
**GE SPACEMAKER® 120V 3.6 CU. FT. STATIONARY ELECTRIC DRYER**

- 3 dry cycles
- 3 heat selections
- Dura Drum interior
- Quiet-by-Design

White – DSKS333ECWW

Complete features and specifications on pages 386-387.  
See page 297 for Accessibility Requirements.  
**Bold = feature upgrade from previous model.**  
For definitions of logos, see page 13.

UNITIZED WASHERS/DRYERS



**GUD27ES/GS**  
**GE 27" UNITIZED WASHER/DRYER WITH 3.8 CU. FT. CAPACITY WASHER AND 5.9 CU. FT. CAPACITY DRYER**

- Stainless steel basket
- Rotary electromechanical controls (dryer)
- 11 wash cycles
- 6 wash temperatures
- 1 wash/spin speed combination
- Auto Load Sensing with 4 water levels
- Rotary electronic controls (washer)
- Bleach dispenser
- WiFi optional (washer)\*

White – GUD27ESSMWW (Electric)  
White – GUD27GSSMWW (Gas)  
Diamond Gray – GUD27ESPMDG (Electric)  
Diamond Gray – GUD27GSPMDG (Gas)

**GUV27ES—LONG-VENT MODEL**  
**UP TO 200-FT. VENTING CAPABILITY**

White – GUV27ESSMWW (Electric)



**GUD27EE/GE**  
**GE 27" ENERGY STAR® UNITIZED WASHER/DRYER WITH 3.9 CU. FT. CAPACITY WASHER AND 5.9 CU. FT. CAPACITY DRYER**

- Precise Fill technology
- Deep Rinse
- 11 wash cycles
- 6 wash temperatures
- Efficient infusor
- Cycle status lights
- End-of-cycle chime
- WiFi optional\*

White – GUD27EESNWW (Electric)  
White – GUD27GESNWW (Gas)



**GUD24ES/GS**  
**GE 24" UNITIZED WASHER/DRYER WITH 2.3 CU. FT. CAPACITY WASHER AND 4.4 CU. FT. CAPACITY DRYER**



- Stainless steel basket
- Rotary electromechanical controls (dryer)
- 11 wash cycles
- 6 wash temperatures
- 1 wash/spin speed combination
- Auto Load Sensing
- Rotary electronic controls (washer)
- Bleach dispenser
- WiFi optional (washer)\*


White – GUD24ESSMWW (Electric)  
White – GUD24GSSMWW (Gas)



\*SmartHQ™ Connect Module is required and sold separately.  
It is available for order on geappliances.com, part number PBX23W00Y0.

CLOTHES CARE PARTS & ACCESSORIES

				
	<b>WX14X10011</b> UNIVERSAL 6' STAINLESS STEEL WASHER HOSE WITH 90° ELBOW, 2-PACK	<b>WX14X10005</b> UNIVERSAL 4' POLYMER-COATED WASHER HOSE, 2-PACK	<b>WH41X10207</b> UNIVERSAL 4' RUBBER WASHER HOSE, 2-PACK	<b>WH49X301</b> WASHING MACHINE DRAIN HOSE EXTENSION KIT
	<ul style="list-style-type: none"><li>• Heavy-duty stainless steel with protective, non-corrosive coating</li><li>• Burst-resistant, triple-ply design for extra durability</li><li>• 90° elbow for installation in tight spaces</li></ul>	<ul style="list-style-type: none"><li>• Certified 1,600 PSI burst strength for greater durability</li><li>• Dual crimping inside and outside reduces chance of leaking</li><li>• Durable braided stainless steel exterior resists puncturing and tearing</li><li>• GE Appliances recommends new hoses for approved installation</li></ul>	<ul style="list-style-type: none"><li>• Not repackaged or reconditioned</li><li>• 800 PSI strength for greater durability</li><li>• Woven polyester reinforcement adds strength, reduces stretching and deterioration</li><li>• GE Appliances recommends new hoses for approved installation</li><li>• GE Appliances recommends replacing hoses every 5 years</li></ul>	
MODEL				
GFW850S	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFD85	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFW650S	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFD65	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFW550S	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFD55/GFV55	-	-	-	-
GFW510S	INCLUDED	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFW148S	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFT14	-	-	-	OPTIONAL ACCESSORY
GFD14	-	-	-	OPTIONAL ACCESSORY
GFQ14	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTW840	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTW845	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTD84	-	-	-	-
GTW500A	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTD45	-	-	-	-
GTW465	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTD42	-	-	-	-
GTW490A	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	INCLUDED	OPTIONAL ACCESSORY
GTW335A	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	OPTIONAL ACCESSORY
GTD33/GTX33	-	-	-	-
GTW220A	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	INCLUDED	OPTIONAL ACCESSORY
GTX22	-	-	-	-
GNW128P	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GNW128S	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
DSKP333	-	-	-	-
DSKS433	-	-	-	-
DSKS333	-	-	-	-
GUD27	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GUD24	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	AVAILABLE FOR INSTALLATION	-
GFQ14E				

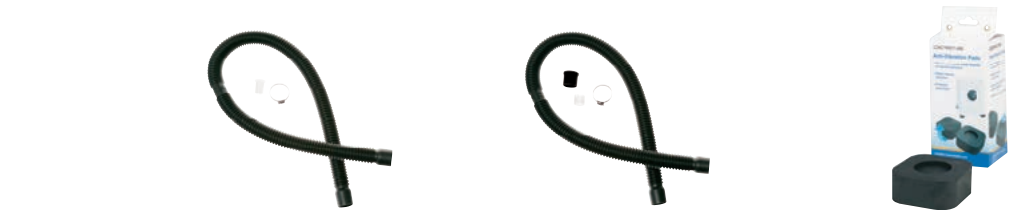

	<b>WH49X316</b> WASHING MACHINE DRAIN HOSE EXTENSION KIT	<b>WH49X317</b> WASHING MACHINE DRAIN HOSE EXTENSION KIT	<b>WX17X10001CA</b> UNIVERSAL ANTI-VIBRATION PADS
			<ul style="list-style-type: none"><li>• Helps reduce noise and vibration from washer and/or dryer</li><li>• Protects floors</li></ul>
MODEL			
GFW850S	OPTIONAL ACCESSORY	-	OPTIONAL ACCESSORY
GFD85	-	-	-
GFW650S	OPTIONAL ACCESSORY	-	OPTIONAL ACCESSORY
GFD65	-	-	-
GFW550S	OPTIONAL ACCESSORY	-	OPTIONAL ACCESSORY
GFD55/GFV55	-	-	-
GFW510S	OPTIONAL ACCESSORY	-	OPTIONAL ACCESSORY
GFW148S	-	OPTIONAL ACCESSORY	-
GFT14	-	-	-
GFD14	-	-	-
GFQ14	-	-	-
GTW840C	-	-	OPTIONAL ACCESSORY
GTW845S	-	-	OPTIONAL ACCESSORY
GTD84	-	-	-
GTW500A	-	-	OPTIONAL ACCESSORY
GTD45	-	-	-
GTW465	-	-	OPTIONAL ACCESSORY
GTD42	-	-	-
GTW490A	-	-	OPTIONAL ACCESSORY
GTW335A	-	-	OPTIONAL ACCESSORY
GTD33 /GTX33	-	-	-
GTW220A	-	-	OPTIONAL ACCESSORY
GTX22	-	-	-
GNW128P	-	OPTIONAL ACCESSORY	-
GNW128S	-	OPTIONAL ACCESSORY	-
DSKP333	-	-	-
DSKS433	-	-	-
DSKS333	-	-	-
GUD27	-	-	-
GUD24	-	-	-
QFW150	-	OPTIONAL ACCESSORY	-
GFQ148	-	OPTIONAL ACCESSORY	-
GFQ14E			


ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM).



CLOTHES CARE PARTS & ACCESSORIES



MODEL	PM7X2 (WHITE)	WX09X10020	PM08X10085
	UNIVERSAL LOW-PROFILE WASHER FLOOR TRAY	UNIVERSAL 4-WIRE, 6', 30-AMP ELECTRICAL DRYER CORD	GE APPLIANCES EXCLUSIVE UNIVERSAL FLEXIBLE METAL TRANSITION DRYER DUCT
	<ul style="list-style-type: none"><li>Protects floor from scuffs, spills, and overflows</li><li>Low-profile washer tray allows pedestal drawer to fully extend without having to lift the washing machine</li><li>Ideal for 2nd floor laundry rooms</li><li>PVC connector included and easily attaches to floor drain for added protection</li><li>Interior dimensions: 29"W x 33"L Exterior dimensions: 31" x 35"</li><li>Maximum capacity: 6.78 gallons/27.5 liters</li></ul>	<ul style="list-style-type: none"><li>99.9% pure copper for optimal performance</li><li>Reinforced stamped brass plug blades reduce breakage and bending</li><li>Ring terminals provide dependable, secure installation</li><li>Space-saving, right-angle plug design gets dryer closer to the wall</li></ul> <p><b>WX09X10018</b>—4-wire, 4', 30-amp <b>WX09X10019</b>—4-wire, 5', 30-amp <b>WX09X10002</b>—3-wire, 4', 30-amp <b>WX09X10003</b>—3-wire, 5', 30-amp <b>WX09X10004</b>—3-wire, 6', 30-amp</p>	<ul style="list-style-type: none"><li>Allows 90° turns without elbows or cutting</li><li>Crush-resistant for enhanced airflow</li><li>8' length fits most installations</li><li>UL* listed*</li></ul>
GFW850S	OPTIONAL ACCESSORY	–	–
GFD85	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GFW650S	OPTIONAL ACCESSORY	–	–
GFD65	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GFW450S	OPTIONAL ACCESSORY	–	–
GFW550S	OPTIONAL ACCESSORY	–	–
GFD55/GFV55	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GFW510S	OPTIONAL ACCESSORY	–	–
GFW148S	–	–	–
GFT14	–	OPTIONAL ACCESSORY	–
GFD14	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GFQ14	–	–	–
GTW840C	OPTIONAL ACCESSORY	–	–
GTW845S	OPTIONAL ACCESSORY	–	–
GTD84	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GTW500A	OPTIONAL ACCESSORY	–	–
GTD45	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GTW465	OPTIONAL ACCESSORY	–	–
GTD42	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GTW490A	OPTIONAL ACCESSORY	–	–
GTW335A	OPTIONAL ACCESSORY	–	–
GTD33 /GTX33	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GTW220A	OPTIONAL ACCESSORY	–	–
GTX22	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GNW128P	–	–	–
GNW128S	–	–	–
DSKP333	–	–	OPTIONAL ACCESSORY
DSKS433	–	–	OPTIONAL ACCESSORY
DSKS333	–	–	OPTIONAL ACCESSORY
GUD27	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GUD24	–	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY
GFQ14E			




MODEL	PM8X73	PM15X114 - 4' PM15X118 - 5'	WE25X0217	WE25M87
	UNIVERSAL FLEXIBLE DRYER DUCT	GAS DRYER CONNECTION KIT WITH AUTO SHUTOFF	GE GAS DRYER LP CONVERSION KIT ACCESSORY	DRYER NATURAL GAS TO PROPANE
	<ul style="list-style-type: none"><li>Flexible design allows for ease of installation</li><li>Made from heavy-duty, 4-ply aluminum foil laminate</li><li>8' x 4" diameter (fully extended)</li><li>UL listed*</li></ul>	<ul style="list-style-type: none"><li>Includes step-by-step instructions and everything needed for safe and easy installation of a gas dryer</li><li>Helps prevent a hazardous buildup of gas</li><li>For indoor or outdoor use</li></ul>	<ul style="list-style-type: none"><li>TL 27" Dryer</li><li>HALC 27" Dryer</li></ul>	
GFW850S	–	–	–	–
GFD85	OPTIONAL ACCESSORY	OPTIONAL FOR INSTALLATION (GAS MODEL ONLY)	–	OPTIONAL FOR INSTALLATION (GAS MODEL ONLY)
GFW650S	–	–	–	–
GFD65	OPTIONAL ACCESSORY	OPTIONAL FOR INSTALLATION (GAS MODEL ONLY)	–	OPTIONAL FOR INSTALLATION (GAS MODEL ONLY)
GFW550S	–	–	–	–
GFD55/GFV55	OPTIONAL ACCESSORY	OPTIONAL FOR INSTALLATION (GAS MODEL ONLY)	–	OPTIONAL FOR INSTALLATION (GAS MODEL ONLY)
GFW510S	–	–	–	–
GFW148S	–	–	–	–
GFT14	–	–	–	–
GFD14	OPTIONAL ACCESSORY	–	–	–
GFQ14	–	–	–	–
GTW840C	–	–	–	–
GTW845S	–	–	–	–
GTD84	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	–
GTW500A	–	–	–	–
GTD45	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	–
GTW465	–	–	–	–
GTD42	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	–
GTW490A	–	–	–	–
GTW335A	–	–	–	–
GTD33 /GTX33	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	–
GTW220A	–	–	–	–
GTX22	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	–
GNW128P	–	–	–	–
GNW128S	–	–	–	–
DSKP333	OPTIONAL ACCESSORY	–	–	–
DSKS433	OPTIONAL ACCESSORY	–	–	–
DSKS333	OPTIONAL ACCESSORY	–	–	–
GUD27	OPTIONAL ACCESSORY	–	–	–
GUD24	OPTIONAL ACCESSORY	–	–	–
GFQ14E				

\*UL is a registered trademark of Underwriters Laboratories, Inc.

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200  
OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM).

CLOTHES CARE PARTS & ACCESSORIES

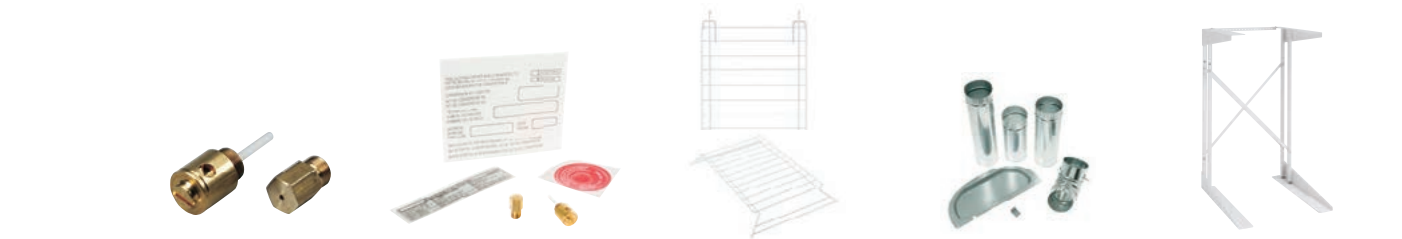

	WE25M73 DRYER LP CONVERSION KIT - 24"	WE25M74 DRYER LP CONVERSION KIT - 27"	WE01X22274 OPTIONAL DRYER RACK	WE16X29317 DRYER SIDE VENT	DSDR24F GE STACK RACK
MODEL					• For use with up to 24"-wide portable or stationary washers and DSKS model dryers
GFW850S	-	-			-
GFD85	-	-	WE02X29449	OPTIONAL ACCESSORY	-
GFW650S	-	-	-	-	-
GFD65	-	-	WE02X29449	OPTIONAL ACCESSORY	-
GFW550S	-	-	-	-	-
GFD55/GFV55	-	-	WE02X29449	OPTIONAL ACCESSORY	-
GFW510S	-	-	-	-	-
GFW148S	-	-	-	-	-
GFT14	-	-	-	-	-
GFD14	-	-	-	-	-
GFQ14	-	-	-	-	-
GTW840C	-	-	-	-	-
GTW845S	-	-	-	-	-
GTD84	-	OPTIONAL FOR INSTALLATION	-	-	-
GTW500A	-	-	-	-	-
GTD45	-	OPTIONAL FOR INSTALLATION	-	-	-
GTW465	-	-	-	-	-
GTD42	-	OPTIONAL FOR INSTALLATION	-	-	-
GTW490A	-	-	-	-	-
GTW335A	-	-	-	-	-
GTD33 / GTX33	-	OPTIONAL FOR INSTALLATION	-	-	-
GTW220A	-	-	-	-	-
GTX22	-	OPTIONAL FOR INSTALLATION	-	-	-
GNW128P	-	-	-	-	OPTIONAL FOR INSTALLATION
GNW128S	-	-	-	-	OPTIONAL FOR INSTALLATION
DSKP333	-	-	-	-	-
DSKS433	-	-	-	-	OPTIONAL FOR INSTALLATION
DSKS333	-	-	-	-	OPTIONAL FOR INSTALLATION
GUD27	-	OPTIONAL FOR INSTALLATION	-	-	-
GUD24	OPTIONAL FOR INSTALLATION	-	-	-	-
GFQ14E					



	GFA28KITN GE WASHER/DRYER STACK BRACKET KIT	GFR0728 7" RIGHTHEIGHT RISER	WMK35 WALL-MOUNT KIT	GFA24KITL GE WASHER/DRYER 24" STACK BRACKET KIT
MODEL		• GFR0728SNWW • GFR0728PNDG • GFR0728PNSN • GFR0728PNRS	• Only applies to stationary models	• For use with 24" front load washers and dryers
GFW850S	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFD85	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFW650S	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFD65	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFW550S	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFD55/GFV55	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFW510S	OPTIONAL ACCESSORY	OPTIONAL ACCESSORY	-	-
GFW148S	-	-	-	OPTIONAL ACCESSORY
GFT14	-	-	-	OPTIONAL ACCESSORY
GFD14	-	-	-	OPTIONAL ACCESSORY
GFQ14	-	-	-	OPTIONAL ACCESSORY
GTW840C	-	-	-	-
GTW845S	-	-	-	-
GTD84	-	-	-	-
GTW500A	-	-	-	-
GTD45	-	-	-	-
GTW465	-	-	-	-
GTD42	-	-	-	-
GTW490A	-	-	-	-
GTW335A	-	-	-	-
GTD33/GTX33	-	-	-	-
GTW220A	-	-	-	-
GTX22	-	-	-	-
GNW128P	-	-	-	-
GNW128S	-	-	-	-
DSKP333	-	-	-	-
DSKS433	-	-	-	-
DSKS333	-	-	-	-
GUD27	-	-	-	-
GUD24	-	-	-	-
GFQ14E				

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200  
OR ONLINE AT [WWW.GEAPPLIANCEPARTS.COM](http://WWW.GEAPPLIANCEPARTS.COM).



A woman with dark hair tied back, wearing a grey long-sleeved shirt and a smartwatch, stands in a modern kitchen. She is holding a smartphone in her right hand, displaying a bar chart app titled 'CURRENT SCHEDULE' with a weekly layout (S M T W T F S). In her left hand, she holds a tall glass of water with ice. The kitchen features blue cabinetry, a stainless steel refrigerator, a microwave, a gas cooktop, and a dishwasher. A mosaic tile backsplash and a knife block are visible on the countertop. A potted plant is on the left.

# PICK THE PERFECT PACKAGE

When you're helping create a dream kitchen, appliance options are a must. That's why we've created a host of striking packages, with options and combinations you can tailor to the tastes and needs of your customers. Choose among silver, gold and platinum package tiers across GE Profile™ and GE Appliances brands. Then hand-pick the right appliances to create the right package for your customer.





# FREE-STANDING PACKAGE OPTIONS



Smart Appliance options  
available in package





# SILVER PACKAGE OPTIONS

For the hard-working kitchen

## FREE-STANDING



### 25.3 CU. FT. SIDE-BY-SIDE REFRIGERATOR

- Fingerprint Resistant Stainless - GSS25GYPFS
- Slate - GSS25GMPES
- White - GSS25GGPWW
- Black - GSS25GGPBB
- Bisque - GSS25GGPCC



### 27 CU. FT. FRENCH-DOOR REFRIGERATOR

- Fingerprint Resistant Stainless - GNE27JYMF5
- Slate - GNE27JMME5
- White - GNE27JGMWW
- Black - GNE27JGMBB



### 30" FREE-STANDING ELECTRIC RANGE

- Stainless - JB645RKSS
- Slate - JB645EKES
- Black Slate - JB645FKDS
- White - JB645DKWW
- Black - JB645DKBB



### 30" FREE-STANDING ELECTRIC CONVECTION RANGE

- Stainless - JB735SPSS
- Slate - JB735EPES
- Black Slate - JB735FPDS
- White - JB735DPWW
- Black - JB735DPBB



### 30" FREE-STANDING GAS RANGE

- Stainless - JGBS66REKSS
- Slate - JGBS66EEKES
- Black Slate - JGBS66FEKDS
- White - JGBS66DEKWW
- Black - JGBS66DEKBB



### 30" FREE-STANDING GAS CONVECTION RANGE

- Stainless - JGB735SPSS
- Slate - JGB735EPES
- Black Slate - JGB735FPDS
- White - JGB735DPWW
- Black - JGB735DPBB



### 1.6 CU. FT. OVER-THE-RANGE MICROWAVE OVEN

- Stainless - JVM316ORFSS
- Slate - JVM316OFES
- White - JVM316ODFWW
- Black - JVM316ODFBB
- Bisque - JVM316ODFCC



### TOP CONTROL WITH PLASTIC INTERIOR DISHWASHER

- Fingerprint Resistant Stainless - GDT550PYRFS
- Slate - GDT550PMRES
- White - GDT550PGRWW
- Black - GDT550PGRBB

Available in front control



### TOP CONTROL WITH PLASTIC INTERIOR DISHWASHER

- Fingerprint Resistant Stainless - GDT630PYRFS
- Slate - GDT630PMRES
- White - GDT630PGRWW
- Black - GDT630PGRBB

Available in pocket handle





# GOLD PACKAGE OPTIONS

For the family kitchen

## FREE-STANDING



**25.1 CU. FT. SIDE-BY-SIDE REFRIGERATOR**

- Fingerprint Resistant Stainless - GSS25IYNFS
- Black Stainless - GSS25IBNTS
- Slate - GSS25IMNES



**25.6 CU. FT. FRENCH-DOOR REFRIGERATOR**

- Fingerprint Resistant Stainless - GFE26JYMFS
- Slate - GFE26JMMES
- Black Slate - GFE26JEMDS
- White - GFE26JGMWW
- Black - GFE26JGMBB



**30" FREE-STANDING ELECTRIC DOUBLE OVEN CONVECTION RANGE**

- Stainless - JBS86SPSS
- Slate - JBS86EPES



**30" SLIDE-IN ELECTRIC RANGE**

- Stainless - JS645SLSS
- White - JS645DLWW
- Slate - JS645ELES



**30" FREE-STANDING GAS DOUBLE OVEN CONVECTION RANGE**

- Stainless - JGBS86SPSS
- Slate - JGBS86EPES



**30" SLIDE-IN FRONT-CONTROL GAS RANGE**

- Stainless - JGSS66SELSS
- Slate - JGSS66EELES



**1.7 CU. FT. OVER-THE-RANGE SENSOR MICROWAVE OVEN**

- Fingerprint Resistant Stainless - JVM6175YKFS
- Stainless - JVM6175SKSS
- Black Stainless - JVM6175BLTS
- Slate - JVM6175EKES
- White - JVM6175DKWW
- Black - JVM6175DKBB



**TOP CONTROL WITH PLASTIC INTERIOR DISHWASHER**

- Fingerprint Resistant Stainless - GDP630PYRFS
- Slate - GDP630PMRES
- White - GDP630PGRWW
- Black - GDP630PGRBB

Available in towel bar handle



**TOP CONTROL WITH STAINLESS STEEL INTERIOR DISHWASHER**

- Fingerprint Resistant Stainless - GDP645SYNFS
- Fingerprint Resistant Stainless - GDT645SYNFS
- Stainless - GDT645SSNSS
- Slate - GDT645SMNES
- White - GDT645SGNWW
- Black - GDT645SGNBB

Available in front control







# PLATINUM PACKAGE OPTIONS

For the high-performing kitchen

FREE-STANDING



### 27.7 CU. FT. FRENCH-DOOR REFRIGERATOR

- Fingerprint Resistant Stainless - GFE28GYNFS
- Slate - GFE28GMKES
- Black Slate - GFE28GELDS



### 30" SLIDE-IN ELECTRIC CONVECTION RANGE

- Stainless - JS760SPSS
- Slate - JS760EPES
- Black Slate - JS760FPDS
- White - JS760DPWW



### 30" SLIDE-IN FRONT-CONTROL CONVECTION GAS RANGE

- Stainless - JGS760SPSS
- Slate - JGS760EPES
- Black Slate - JGS760FPDS
- White - JGS760DPWW



### 30" SLIDE-IN ELECTRIC CONVECTION DOUBLE OVEN RANGE

- Stainless - JSS86SPSS



### 30" SLIDE-IN CONVECTION DOUBLE OVEN GAS RANGE

- Stainless - JGSS86SPSS



### 1.9 CU. FT. OVER-THE-RANGE SENSOR MICROWAVE OVEN

- Stainless - JVM7195SKSS
- Slate - JVM7195EKES
- Black Slate - JVM7195FLDS
- White - JVM7195DKWW
- Black - JVM7195DKBB



### STAINLESS STEEL INTERIOR SMART DISHWASHER

- Fingerprint Resistant Stainless - GDP665SYNFS
- Stainless - GDT665SSNSS
- Slate - GDT665SMNES
- Black Slate - GDT665SFNDS
- White - GDT665SGNWW
- Black - GDT665SGNBB







# Free-standing

## PACKAGE OPTIONS



Smart Appliance options  
available in package





# Silver Package Options

For the modern kitchen

FREE-STANDING



**27.7 CU. FT. FRENCH-DOOR REFRIGERATOR**  
with Hands-Free AutoFill

- Fingerprint Resistant Stainless - PFE28KYNFS
- Slate - PFE28KMKEs
- Black Slate - PFE28KBLTS



**25.3 CU. FT. SIDE-BY-SIDE REFRIGERATOR**

- Fingerprint Resistant Stainless - PSE25KYHFS



**30" SMART FREE-STANDING ELECTRIC DOUBLE OVEN CONVECTION RANGE**

- Fingerprint Resistant Stainless - PB965YPFS
- Black Stainless - PB965BPts



**30" SMART FREE-STANDING GAS DOUBLE OVEN CONVECTION RANGE**

- Fingerprint Resistant Stainless - PGB965YPFS
- Black Stainless - PGB965BPts



**30" SMART FREE-STANDING ELECTRIC CONVECTION RANGE**

- Fingerprint Resistant Stainless - PB935YPFS



**30" SMART FREE-STANDING GAS CONVECTION RANGE**

- Fingerprint Resistant Stainless - PGB935YPFS



**2.1 CU. FT. OVER-THE-RANGE SENSOR MICROWAVE OVEN**

- Stainless - PVM9005SJSS
- Black Stainless - PVM9005BLTS
- Slate - PVM9005EJES



**2.1 CU. FT. OVER-THE-RANGE SENSOR MICROWAVE OVEN**

- Stainless - PVM9215SKSS



**TOP CONTROL WITH STAINLESS STEEL INTERIOR DISHWASHER**

- Fingerprint Resistant Stainless - PDP715SYNFS
- Black Stainless - PDP715SBNTS

Available in towel bar handle



# Gold Package Options

For the technology enthusiast

FREE-STANDING



**27.7 CU. FT. FRENCH-DOOR REFRIGERATOR**  
with Door in Door and Hands-Free AutoFill

- Fingerprint Resistant Stainless - PFD28KYNFS



**30" SMART SLIDE-IN ELECTRIC CONVECTION RANGE**

- Fingerprint Resistant Stainless - PSS93YPFS
- Black Stainless - PSS93BPTS



**30" SMART SLIDE-IN FRONT-CONTROL GAS RANGE**

- Fingerprint Resistant Stainless - PGS930YPFS
- Black Stainless - PGS930BPTS



**1.7 CU. FT. CONVECTION OVER-THE-RANGE MICROWAVE**

- Stainless - PVM9179SKSS
- Black Stainless - PVM9179BLTS
- White - PVM9179DKWW
- Black - PVM9179DKBB



**STAINLESS STEEL INTERIOR SMART DISHWASHER**

- Fingerprint Resistant Stainless - PDT775SYNFS





# Platinum Package Options

For the ultimate smart home

FREE-STANDING



**27.9 CU. FT. SMART 4-DOOR FRENCH-DOOR REFRIGERATOR** with Door in Door  
Fingerprint Resistant Stainless - PVD28BYNFS



**27.7 CU. FT. SMART FRENCH-DOOR REFRIGERATOR** with Keurig® K-Cup® Brewing System  
Fingerprint Resistant Stainless - PFE28PYNFS



**30" SMART SLIDE-IN FRONT-CONTROL INDUCTION RANGE** with In-Oven Camera  
Stainless - PHS93XYPFS



**30" SMART SLIDE-IN FRONT-CONTROL DUAL-FUEL RANGE**  
Fingerprint Resistant Stainless - P2S930YPFS



**30" SMART SLIDE-IN FRONT-CONTROL ELECTRIC DOUBLE OVEN CONVECTION RANGE**  
Fingerprint Resistant Stainless - PS960YPFS



**30" SMART SLIDE-IN FRONT-CONTROL GAS DOUBLE OVEN CONVECTION RANGE**  
Fingerprint Resistant Stainless - PGS960YPFS



**OVER-THE-RANGE OVEN** with Advantium® Technology  
Stainless - PSA9240SPSS  
Stainless - PSA9120SPSS



**STAINLESS STEEL INTERIOR SMART DISHWASHER**  
Fingerprint Resistant Stainless - PDT785SYNFS  
Black Stainless - PDT785SBNTS







# BUILT-IN PACKAGE OPTIONS



Smart Appliance options  
available in package





# SILVER PACKAGE OPTIONS

For the hard-working kitchen

## BUILT-IN



**21.8 CU. FT. COUNTER-DEPTH SIDE-BY-SIDE REFRIGERATOR**

- Fingerprint Resistant Stainless - GZS22IYNFS
- Slate - GZS22IMNES



**17.5 CU. FT. COUNTER-DEPTH FRENCH-DOOR REFRIGERATOR**

- Stainless - GYE18JYLFS
- Slate - GYE18JMLES



**30" SMART BUILT-IN SINGLE WALL OVEN**

- Stainless - JTS3000SNSS
- White - JTS3000DNWW



**30" SMART BUILT-IN DOUBLE WALL OVEN**

- Stainless - JTD3000SNSS
- Slate - JTD3000ENES
- White - JTD3000DNWW



**30" COMBINATION DOUBLE WALL OVEN**

- Stainless - JT3800SHSS



**36" BUILT-IN KNOB CONTROL ELECTRIC COOKTOP**

- Stainless - JP3036SLSS
- White - JGP3036DLWW
- Black - JP3036DLBB

**30" BUILT-IN KNOB CONTROL ELECTRIC COOKTOP**

- Stainless - JP3030SJSS
- White - JP3030TJWW
- Black - JP3030DJBB



**36" BUILT-IN GAS COOKTOP**

- Stainless - JGP3036SLSS
- White - JGP3036DLWW
- Black - JGP3036DLBB

**30" BUILT-IN GAS COOKTOP**

- Stainless - JGP3030SLSS
- White - JGP3030DLWW
- Black - JGP3030DLBB



**30" UNDER-THE-CABINET HOOD**

- Stainless - JVV3300SJSS
- Slate - JVV3300EJES
- White - JVV3300DJWW
- Black - JVV3300DJBB

**36" UNDER-THE-CABINET HOOD**

- Stainless - JVV5360SJSS
- White - JVV5360DJWW



**1.1 CU. FT. CAPACITY COUNTERTOP MICROWAVE OVEN**

- Stainless - JES1145SHSS
- White - JES1145DLWW
- Black - JES1145DMBB



**TOP CONTROL WITH PLASTIC INTERIOR DISHWASHER**

- Stainless - GDT535PSRSS
- White - GDT535PGRWW
- Black - GDT535PGRBB



**TOP CONTROL WITH PLASTIC INTERIOR DISHWASHER**

- Fingerprint Resistant Stainless - GDT550PYRFS
- Slate - GDT550PMRES
- White - GDT550PGRWW
- Black - GDT550PGRBB

Available in front control



**TOP CONTROL WITH PLASTIC INTERIOR DISHWASHER**

- Fingerprint Resistant Stainless - GDT630PYRFS
- Slate - GDT630PMRES
- White - GDT630PGRWW
- Black - GDT630PGRBB

Available in pocket handle





# GOLD PACKAGE OPTIONS

For the family kitchen

## BUILT-IN



### 23.1 CU. FT. COUNTER-DEPTH FRENCH-DOOR REFRIGERATOR

- Fingerprint Resistant Stainless - GWE23GYNFS
- Slate - GWE23GMNES
- Black Slate - GWE23GENDS



### 30" SMART BUILT-IN CONVECTION SINGLE WALL OVEN

- Stainless - JTS5000SNSS
- Slate - JTS5000ENES
- Black - JTS5000DNBB




### 30" SMART BUILT-IN CONVECTION DOUBLE WALL OVEN

- Stainless - JTD5000SNSS
- Slate - JTD5000ENES
- Black - JTD5000DNBB



### 30" COMBINATION DOUBLE WALL OVEN

- Stainless - JT3800SHSS



### 30" BUILT-IN GAS COOKTOP

- Stainless - JGP5030SLSS
- Black - JGP5030DLBB

### 36" BUILT-IN GAS COOKTOP

- Stainless - JGP5036SLSS
- Black - JGP5036DLBB



### 30" BUILT-IN TOUCH CONTROL ELECTRIC COOKTOP

- Stainless - JP5030SJSS
- Black - JP5030DJBB

### 36" BUILT-IN TOUCH CONTROL ELECTRIC COOKTOP

- Stainless - JP5036SJSS
- Black - JP5036DJBB



### 30" UNDER-THE-CABINET HOOD

- Stainless - JVB5300SJSS
- Slate - JVB5300EJES
- Black Slate - JVB5300BJTS
- White - JVB5300DJWW
- Black - JVB5300DJBB



### 1.6 CU. FT. COUNTERTOP MICROWAVE OVEN

- Stainless - JES1657SMSS
- Black Stainless - JES1657BMTS
- White - JES1657DMWW
- Black - JES1657DMBB



### TOP CONTROL WITH PLASTIC INTERIOR DISHWASHER

- Fingerprint Resistant Stainless - GDP630PYRFS
- Slate - GDP630PMRES
- White - GDP630PGRWW
- Black - GDP630PGRBB

Available in towel bar handle



### STAINLESS STEEL INTERIOR SMART DISHWASHER

- Fingerprint Resistant Stainless - GDP645SYNFS
- Fingerprint Resistant Stainless - GDT645SYNFS
- Stainless - GDT645SSNSS
- Slate - GDT645SMNES
- White - GDT645SGNWW
- Black - GDT645SGNBB

Available in front control







# PLATINUM PACKAGE OPTIONS

For the high-performing kitchen

## BUILT-IN



### 22.1 CU. FT. COUNTER-DEPTH FRENCH-DOOR REFRIGERATOR

- Stainless - GYE22GYNFS
- Slate - GYE22GMNES
- Black Slate - GYE22GENDS



### 30" SMART BUILT-IN CONVECTION SINGLE WALL OVEN

- Stainless - JTS5000SNSS
- Slate - JTS5000ENES
- Black - JTS5000DNBB



### 30" SMART BUILT-IN CONVECTION DOUBLE WALL OVEN

- Stainless - JTD5000SNSS
- Slate - JTD5000ENES
- Black - JTD5000DNBB



### 30" COMBINATION DOUBLE WALL OVEN

- Stainless - JT3800SHSS



### 30" BUILT-IN GAS COOKTOP

- Stainless - JGP5030SLSS
- Black - JGP5030DLBB

### 36" BUILT-IN GAS COOKTOP

- Stainless - JGP5036SLSS
- Black - JGP5036DLBB



### 30" BUILT-IN TOUCH CONTROL ELECTRIC COOKTOP

- Stainless - JP5030SJSS
- Black - JP5030DJBB

### 36" BUILT-IN TOUCH CONTROL ELECTRIC COOKTOP

- Stainless - JP5036SJSS



### 30" WALL-MOUNT PYRAMID CHIMNEY HOOD

- Stainless - JVV5301SJSS
- Black Stainless - JVV5301BJTS
- Slate - JVV5301EJES
- Black Slate - JVV5301FJDS

### 36" WALL-MOUNT PYRAMID CHIMNEY HOOD

- Stainless - JVV5361SJSS
- Slate - JVV5361EJES
- Black Slate - JVV5361FJDS

Ceiling duct cover kit available



### 2.0 CU. FT. CAPACITY COUNTERTOP MICROWAVE OVEN

- Stainless - JES2051SNSS
- White - JES2051DNWW
- Black - JES2051DNBB



### STAINLESS STEEL INTERIOR SMART DISHWASHER

- Fingerprint Resistant Stainless - GDP665SYNFS
- Stainless - GDT665SSNSS
- Slate - GDT665SMNES
- Black Slate - GDT665SFNDS
- White - GDT665SGNWW
- Black - GDT665SGNBB





# PLATINUM PACKAGE OPTIONS

(Continued)

## BUILT-IN



**BEVERAGE CENTER**  
Stainless - GVS04BQNSS



**WINE CENTER**  
Stainless - GWS04HAESS



**ICE MAKER 15" - NUGGET ICE**  
Panel Ready - UNC15NJII

**STAINLESS STEEL ICE MAKER DOOR KIT**  
Stainless - PIP70SS



**ICE MAKER 15" - GOURMET CLEAR ICE**  
Panel Ready - UCC15NJII

**STAINLESS STEEL ICE MAKER DOOR KIT**  
Stainless - PIP70SS







# Built-in

## PACKAGE OPTIONS



Smart Appliance options  
available in package



# Silver Package Options

For the modern kitchen

## BUILT-IN



**21.9 CU. FT. COUNTER-DEPTH SIDE-BY-SIDE REFRIGERATOR**

■ Fingerprint Resistant Stainless - PZS22MYKFS



**23.1 CU. FT. COUNTER-DEPTH FRENCH-DOOR REFRIGERATOR**

■ Fingerprint Resistant Stainless - PWE23KYNFS  
■ Slate - PWE23KMKES  
■ Black Slate - PWE23KELDS



**30" SMART BUILT-IN CONVECTION SINGLE WALL OVEN**

■ Stainless - PTS7000SNSS  
■ Black Stainless - PTS7000BNTS



**30" SMART BUILT-IN CONVECTION DOUBLE WALL OVEN**

■ Stainless - PTD7000SNSS  
■ Black Stainless - PTD7000BNTS



**30" BUILT-IN COMBINATION CONVECTION MICROWAVE/ CONVECTION WALL OVEN**

■ Stainless - PT7800SHSS



**30" SMART BUILT-IN TWIN FLEX CONVECTION WALL OVEN**

■ Stainless - PTS9200SNSS



**30" SMART BUILT-IN CONVECTION SINGLE WALL OVEN**

with left-hand, side-swing door  
■ Stainless - PTS700LSNSS



**30" SMART BUILT-IN CONVECTION DOUBLE WALL OVEN**

with left-hand, side-swing door  
■ Stainless - PTD700LSNSS



**30" BUILT-IN KNOB CONTROL ELECTRIC COOKTOP**

■ Black - PP7030DJBB

**36" BUILT-IN KNOB CONTROL ELECTRIC COOKTOP**

■ Black - PP7036DJBB



**30" BUILT-IN GAS COOKTOP**

■ Stainless - PGP7030SLSS

**36" BUILT-IN GAS COOKTOP**

■ Stainless - PGP7036SLSS



**BUILT-IN MICROWAVE/ CONVECTION OVEN**

■ Stainless - PWB7030SLSS



**1.1 CU. FT. COUNTERTOP MICROWAVE OVEN**

■ Stainless - PEM31SFSS  
■ Black Stainless - PEM31BMTS  
■ White - PEM31DFWW  
■ Black - PEM31DFBB

Built-in kits available



**STAINLESS STEEL INTERIOR SMART DISHWASHER**

■ Fingerprint Resistant Stainless - PDP715SYNFS  
■ Fingerprint Resistant Stainless - PDT715SYNFS  
■ Black Stainless - PDP715SBNTS  
■ Black Stainless - PDT715SBNTS



**30" DESIGNER WALL-MOUNT HOOD**

with Dimmable LED Lighting  
■ Stainless - UVW8301SLSS

**36" DESIGNER WALL-MOUNT HOOD**

with Dimmable LED Lighting  
■ Stainless - UVW8361SLSS

12 & 14 ft. ceiling duct cover kits available







# Gold Package Options

For the technology enthusiast

## BUILT-IN



### 21.9 CU. FT. COUNTER-DEPTH SIDE-BY-SIDE REFRIGERATOR

Stainless - PZS22MYKFS



### 22.1 CU. FT. COUNTER-DEPTH FRENCH-DOOR REFRIGERATOR with Hands-Free AutoFill

Fingerprint Resistant Stainless - PYE22KYNFS  
Black Stainless - PYE22KBLTS  
Slate - PYE22KMKES  
Black Slate - PYE22KELDS



### 30" SMART BUILT-IN CONVECTION SINGLE WALL OVEN

Stainless - PTS9000SNSS  
Black Stainless - PTS9000BNTS




### 30" SMART BUILT-IN CONVECTION DOUBLE WALL OVEN

Stainless - PTD9000SNSS  
Black Stainless - PTD9000BNTS



### 30" BUILT-IN TOUCH CONTROL ELECTRIC COOKTOP

Stainless - PP9030SJSS  
Black - PP9030DJBB



### 30" BUILT-IN GAS COOKTOP

Stainless - PGP9030SLSS

### 36" BUILT-IN GAS COOKTOP

Stainless - PGP9036SLSS



### 30" DESIGNER WALL-MOUNT HOOD with Dimmable LED Lighting

Stainless - UVW8301SLSS

### 36" DESIGNER WALL-MOUNT HOOD with Dimmable LED Lighting

Stainless - UVW8361SLSS

12 & 14 ft. ceiling duct cover kits available



### 30" COMMERCIAL HOOD

Stainless - UVW93042PSS

### 36" COMMERCIAL HOOD

Stainless - UVW93642PSS



### 30" SINGLE WALL OVEN with Advantium® Technology

Stainless - PSB9120SFSS  
Black Stainless - PSB9120BLTS



### 1.1 CU. FT. COUNTERTOP MICROWAVE OVEN

Stainless - PEM31SFSS  
Black Stainless - PEM31BMTS  
White - PEM31DFWW  
Black - PEM31DFBB

Built-in kits available



### STAINLESS STEEL INTERIOR SMART DISHWASHER

Fingerprint Resistant Stainless - PDT775SYNFS





# Platinum Package Options

For the ultimate smart home

## BUILT-IN



**22.1 CU. FT. SMART COUNTER-DEPTH FRENCH-DOOR REFRIGERATOR**  
with Door In Door and Hands-Free AutoFill

Stainless - PYD22KYNFS



**22.1 CU. FT. COUNTER-DEPTH FRENCH-DOOR REFRIGERATOR**  
with Keurig® K-Cup® Brewing System

Stainless - PYE22PYNFS



**30" SMART BUILT-IN CONVECTION SINGLE WALL OVEN**

Stainless - PTS9000SNSS  
Black Stainless - PTS9000BNTS



**30" SMART BUILT-IN CONVECTION DOUBLE WALL OVEN**

Stainless - PTD9000SNSS  
Black Stainless - PTD9000BNTS



**36" BUILT-IN GAS COOKTOP**

Stainless - PGP9036SLSS

**30" BUILT-IN GAS COOKTOP**

Stainless - PGP9030SLSS



**36" BUILT-IN TOUCH CONTROL INDUCTION COOKTOP**

Stainless - PHP9036SJSS  
Black - PHP9036DJBB

**30" BUILT-IN TOUCH CONTROL INDUCTION COOKTOP**

Stainless - PHP9030SJSS  
Black - PHP9030DJBB



**30" COMMERCIAL HOOD**

Stainless - UVW93042PSS

**36" COMMERCIAL HOOD**

Stainless - UVW93642PSS



**30" SMART DESIGNER WALL-MOUNT HOOD**  
with Perimeter Venting

Stainless - UVW9301SLSS  
Black Stainless - UVW9301BLTS

**36" SMART DESIGNER WALL-MOUNT HOOD**  
with Perimeter Venting

Stainless - UVW9361SLSS  
Black Stainless - UVW9361BLTS

High ceiling duct cover kits available



**30" SINGLE WALL OVEN**  
with Advantium® Technology

Stainless - PSB9240SFSS



**1.5 CU. FT. COUNTERTOP CONVECTION/MICROWAVE OVEN**

Stainless - PEB9159SJSS  
Black - PEB9159DJBB

Built-in kits available



**STAINLESS STEEL INTERIOR SMART DISHWASHER**

Fingerprint Resistant Stainless - PDT785SYNFS  
Black Stainless - PDT785SBNTS





# Profile™ Platinum Package Options

(Continued)

## BUILT-IN



**BEVERAGE CENTER**  
 Stainless - PVS06BSPSS



**WINE CENTER**  
 Stainless - PWS06DSPSS



**ICE MAKER 15" - NUGGET ICE**  
 Panel Ready - UNC15NJII

**STAINLESS STEEL ICE MAKER DOOR KIT**  
 Stainless - PIP70SS



**ICE MAKER 15" - GOURMET CLEAR ICE**  
 Panel Ready - UCC15NJII

**STAINLESS STEEL ICE MAKER DOOR KIT**  
 Stainless - PIP70SS



**UNIVERSAL 15" BUILT-IN COMPACTOR**  
 Stainless - UCG1520NSS  
 White - UCG1500NWW  
 Black - UCG1500NBB  
 Panel Ready - UCG1510NII

REFRIGERATION

COOKING

DISHWASHERS

CLOTHES CARE

PACKAGE OPTIONS

WATER SYSTEMS

AIR CONDITIONERS





# CLOTHES CARE PACKAGE OPTIONS



Smart Appliance options  
available in package





# CLOTHES CARE PACKAGE OPTIONS

## FRONT LOAD



**4.8 CU. FT. CAPACITY SMART FRONT LOAD WASHER**  
with UltraFresh Vent System, OdorBlock™ and Sanitize with Oxi

White - GFW550SSNWW

**7.8 CU. FT. CAPACITY SMART FRONT LOAD DRYER**  
with Sanitize Cycle

White - GFD55ESSNWW (Electric)  
White - GFD55GSSNWW (Gas)



**5.0 CU. FT. CAPACITY SMART FRONT LOAD STEAM WASHER**  
with SmartDispense, UltraFresh Vent System with OdorBlock and Sanitize + Allergen

Sapphire Blue - GFW850SPNRS  
White - GFW850SSNWW

**7.8 CU. FT. CAPACITY SMART FRONT LOAD DRYER**  
with Steam and Sanitize Cycle

Sapphire Blue - GFD85ESPNRS (Electric)  
White - GFD85ESSNWW (Electric)  
Sapphire Blue - GFD85GSPNRS (Gas)  
White - GFD85GSSNWW (Gas)



**4.8 CU. FT. CAPACITY SMART FRONT LOAD STEAM WASHER**  
with SmartDispense™, UltraFresh Vent System with OdorBlock and Sanitize + Allergen

Satin Nickel - GFW650SPNSN  
White - GFW650SSNWW


**7.8 CU. FT. CAPACITY SMART FRONT LOAD DRYER**  
with Steam and Sanitize Cycle

Satin Nickel - GFD65ESPN (Electric)  
White - GFD65ESSNWW (Electric)  
Satin Nickel - GFD65GSPNSN (Gas)  
White - GFD65GSSNWW (Gas)



**FRONT LOAD WASHER/DRYER PEDESTAL**

Sapphire Blue - GFP1528PNRS  
Satin Nickel - GFP1528PNSN  
White - GFP1528SNWW



**FRONT LOAD WASHER/DRYER 7" RIGHTHEIGHT™ RISER**

Sapphire Blue - GFR0728PNRS  
Satin Nickel - GFR0728PNSN  
White - GFR0728SNWW





# CLOTHES CARE PACKAGE OPTIONS

## TOP LOAD



**4.2 CU. FT. CAPACITY WASHER**  
with Stainless Steel Basket  
☐ White - GTW335ASNWW

**7.2 CU. FT. CAPACITY ALUMINIZED ALLOY DRUM DRYER**  
☐ White - GTD33EASKWW (ELECTRIC)  
☐ White - GTD33GASKWW (GAS)



**4.5 CU. FT. CAPACITY WASHER**  
with Stainless Steel Basket  
☐ White - GTW465ASNWW

**7.2 CU. FT. CAPACITY ALUMINIZED ALLOY DRUM DRYER**  
☐ White - GTD42EASJWW (ELECTRIC)  
☐ White - GTD42GASJWW (GAS)



**4.6 CU. FT. CAPACITY WASHER**  
with Stainless Steel Basket  
☐ White - GTW500ASNWS

**7.2 CU. FT. CAPACITY ALUMINIZED ALLOY DRUM DRYER**  
with Sensor Dry  
☐ White - GTD45EASJWS (ELECTRIC)  
☐ White - GTD45GASJWS (GAS)



**5.2 CU. FT. CAPACITY SMART WASHER**  
with Sanitize with Oxi and SmartDispense™  
☒ Diamond Gray - GTW840CPNDG  
☐ White - GTW840CSNWS

**7.2 CU. FT. CAPACITY SMART ALUMINIZED ALLOY DRUM DRYER**  
with Sanitize Cycle and Sensor Dry  
☒ Diamond Gray - GTD84ECPNDG (ELECTRIC)  
☐ White - GTD84ECSNWS (ELECTRIC)  
☒ Diamond Gray - GTD84GCPNDG (GAS)  
☐ White - GTD84GCSNW (GAS)



**5.0 CU. FT. CAPACITY SMART WASHER**  
with Sanitize with Oxi and SmartDispense™  
☒ Diamond Gray - GTW845CPNDG  
☐ White - GTW845CSNWS

**7.4 CU. FT. CAPACITY SMART ALUMINIZED ALLOY DRUM DRYER**  
with Sanitize Cycle and Sensor Dry  
☒ Diamond Gray - GTD84ECPNDG (ELECTRIC)  
☐ White - GTD84ECSNWS (ELECTRIC)  
☒ Diamond Gray - GTD84GCPNDG (GAS)  
☐ White - GTD84GCSNWS (GAS)







# WATER SYSTEMS



# REALMAX™ SERIES WATER HEATERS

## FEATURE HIGHLIGHTS



### REALMAX CAPACITY

Get the most hot showers from our RealMAX series of water heaters that hold a true 30, 40 and 50 gallons of hot water.



### LEADING PERFORMANCE

Live comfortably with best-in-class performance that delivers high first hour ratings. (Measured through DOE First Hour Rating)



### LEADING WARRANTY

GE Appliances offers an industry-leading warranty on all our water heaters.



GE REALMAX™ SERIES ELECTRIC TANK-STYLE WATER HEATERS



- GE50T10BAM** (PREMIUM)  
**GE REALMAX PREMIUM 50-GALLON RATED CAPACITY TALL**
- Family size 3 to 5\*
  - Thermostat
  - Two 5,500-watt stainless steel heating elements
  - 76-gallon First Hour Rating
  - Brass drain valves

- GE50T08BAM** (CHOICE)
- Two 5,500-watt copper heating elements



- GE50S10BAM** (PREMIUM)  
**GE REALMAX PREMIUM 50-GALLON RATED CAPACITY SHORT**
- Family size 3 to 5\*
  - Thermostat
  - Two 5,500-watt stainless steel heating elements
  - 76-gallon First Hour Rating
  - Brass drain valves

- GE50S08BAM** (CHOICE)
- Two 5,500-watt copper heating elements



- GE30T10BAM** (PREMIUM)  
**GE REALMAX PREMIUM 30-GALLON RATED CAPACITY TALL**
- Family size 1 to 3\*
  - Thermostat
  - Two 5,500-watt stainless steel heating elements
  - 54-gallon First Hour Rating
  - Brass drain valves

- GE30T08BAM** (CHOICE)
- Two 5,500-watt copper heating elements



- GE30S10BAM** (PREMIUM)  
**GE REALMAX PREMIUM 30-GALLON RATED CAPACITY SHORT**
- Family size 1 to 3\*
  - Thermostat
  - Two 5,500-watt stainless steel heating elements
  - 53-gallon First Hour Rating
  - Brass drain valves

- GE30S08BAM** (CHOICE)
- Two 5,500-watt copper heating elements



- GE40T10BAM** (PREMIUM)  
**GE REALMAX PREMIUM 40-GALLON RATED CAPACITY TALL**
- Family size 2 to 4\*
  - Thermostat
  - Two 5,500-watt stainless steel heating elements
  - 65-gallon First Hour Rating
  - Brass drain valves

- GE40T08BAM** (CHOICE)
- Two 5,500-watt copper heating elements



- GE40S10BAM** (PREMIUM)  
**GE REALMAX PREMIUM 40-GALLON RATED CAPACITY SHORT**
- Family size 2 to 4\*
  - Thermostat
  - Two 5,500-watt stainless steel heating elements
  - 66-gallon First Hour Rating
  - Brass drain valves

- GE40S08BAM** (CHOICE)
- Two 5,500-watt copper heating elements



- GE40L08BSM** (CHOICE)  
**GE REALMAX CHOICE 36-GALLON RATED CAPACITY LOWBOY**
- Family size 2 to 4\*
  - Thermostat
  - Two 5,500-watt copper heating elements
  - 63-gallon First Hour Rating
  - Side port

- GE40L08BAM** (CHOICE)
- Top port
  - 61-gallon First Hour Rating



- GE30L08BSM** (CHOICE)  
**GE REALMAX CHOICE 26-GALLON RATED CAPACITY LOWBOY**
- Family size 1 to 3\*
  - Thermostat
  - Two 5,500-watt copper heating elements
  - 58-gallon First Hour Rating
  - Side port

- GE30L08BAM** (CHOICE)
- Top port
  - 53-gallon First Hour Rating

\*Household sizing based on back-to-back showers, 8 minutes long. Complete features and specifications on pages 390-391.

GE REALMAX™ ATMOSPHERIC NATURAL GAS  
TANK-STYLE WATER HEATERS



- GG50T12BXR**  
**GE REALMAX PLATINUM 50-GALLON TALL NATURAL GAS**
- Family size 3-5+\*
  - Thermostat
  - High-performance 40K BTU burner
  - Brass drain valve
  - 86-gallon First Hour Rating
- GG50T10BXR** (not shown)  
**GE REALMAX PREMIUM 50-GALLON TALL NATURAL GAS**
- Polymer drain valve
- GG50T08BXR** (not shown)  
**GE REALMAX CHOICE 50-GALLON TALL NATURAL GAS**
- Polymer drain valve



- GG50S10BXR**  
**GE REALMAX PREMIUM 50-GALLON SHORT NATURAL GAS**
- Family size 3-5+\*
  - Thermostat
  - High-performance 40K BTU burner
  - Polymer drain valve
  - 87-gallon First Hour Rating
- GG50S08BXR** (not shown)  
**GE REALMAX CHOICE 50-GALLON SHORT NATURAL GAS**



- GG40T12BXR**  
**GE REALMAX PLATINUM 40-GALLON TALL NATURAL GAS**
- Family size 2-4\*
  - Thermostat
  - High-performance 40K BTU burner
  - Brass drain valve
  - 84-gallon First Hour Rating
- GG40T10BXR** (not shown)  
**GE REALMAX PREMIUM 40-GALLON TALL NATURAL GAS**
- Polymer drain valve
- GG40T08BXR** (not shown)  
**GE REALMAX CHOICE 40-GALLON TALL NATURAL GAS**
- Polymer drain valve



- GG40S12BXR**  
**GE REALMAX PLATINUM 40-GALLON SHORT NATURAL GAS**
- Family size 2-4\*
  - Thermostat
  - High-performance 38K BTU burner
  - Brass drain valve
  - 83-gallon First Hour Rating
- GG40S10BXR** (not shown)  
**GE REALMAX PREMIUM 40-GALLON SHORT NATURAL GAS**
- Polymer drain valve
- GG40S08BXR** (not shown)  
**GE REALMAX CHOICE 40-GALLON SHORT NATURAL GAS**
- Polymer drain valve



- GG30T08BXR**  
**GE REALMAX CHOICE 30-GALLON TALL NATURAL GAS**
- Family size 1-3\*
  - Thermostat
  - High-performance 38K BTU burner
  - Polymer drain valve
  - 74-gallon First Hour Rating



- GG30S08BXR**  
**GE REALMAX CHOICE 30-GALLON SHORT NATURAL GAS**
- Family size 1-3\*
  - Thermostat
  - High-performance 34K BTU burner
  - Polymer drain valve
  - 67-gallon First Hour Rating

GE REALMAX ATMOSPHERIC LIQUID PROPANE  
TANK-STYLE WATER HEATERS



- GP50T12BXR**  
**GE REALMAX PLATINUM 50-GALLON TALL LIQUID PROPANE**
- Family size 3-5+\*
  - Thermostat
  - High-performance 36K BTU burner
  - Brass drain valve
  - 86-gallon First Hour Rating
- GP50T10BXR** (not shown)  
**GE REALMAX PREMIUM 50-GALLON TALL LIQUID PROPANE**
- Polymer drain valve
- GP50T08BXR** (not shown)  
**GE REALMAX CHOICE 50-GALLON TALL LIQUID PROPANE**
- Polymer drain valve



- GP40T12BXR**  
**GE REALMAX PLATINUM 40-GALLON TALL LIQUID PROPANE**
- Family size 2-4\*
  - Thermostat
  - High-performance 36K BTU burner
  - Brass drain valve
  - 84-gallon First Hour Rating
- GP40T10BXR** (not shown)  
**GE REALMAX PREMIUM 40-GALLON TALL LIQUID PROPANE**
- Polymer drain valve
- GP40T08BXR** (not shown)  
**GE REALMAX CHOICE 40-GALLON TALL LIQUID PROPANE**
- Polymer drain valve



- GP30T08BXR**  
**GE REALMAX CHOICE 30-GALLON TALL LIQUID PROPANE**
- Family size 1-3\*
  - Thermostat
  - High-performance 36K BTU burner
  - Polymer drain valve
  - 74-gallon First Hour Rating



- GP40S12BXR**  
**GE REALMAX PLATINUM 40-GALLON SHORT LIQUID PROPANE**
- Family size 2-4\*
  - Thermostat
  - High-performance 35K BTU burner
  - Brass drain valve
  - 84-gallon First Hour Rating
- GP40S10BXR** (not shown)  
**GE REALMAX PREMIUM 40-GALLON SHORT LIQUID PROPANE**
- Polymer drain valve
- GP40S08BXR** (not shown)  
**GE REALMAX CHOICE 40-GALLON SHORT LIQUID PROPANE**
- Polymer drain valve



- GP30S08BXR**  
**GE REALMAX CHOICE 30-GALLON SHORT LIQUID PROPANE**
- Family size 1-3\*
  - Thermostat
  - High-performance 34K BTU burner
  - Polymer drain valve
  - 67-gallon First Hour Rating

\*Household sizing based on back-to-back showers, 8 minutes long. Complete features and specifications on page 392. For definitions of logos, see page 13.


**SmartShield™ Safety System** monitors the surrounding air and automatically shuts off the unit if abnormal temperatures are detected.





# ELECTRIC POINT-OF-USE TANK-STYLE

## FEATURE HIGHLIGHTS



### WHOLE HOME FLEXIBILITY

Installation options provide hot water to a specific hookup or to a small house, condo or apartment.




### IDEAL LOCATION

Place under the kitchen, bathroom and pantry sinks.



### COMPACT DESIGN

Make the most of tight spaces with a water heater that fits everywhere.



### STRAIGHTFORWARD CONNECTION

The heater connects right into a 120-Volt supply.

## ELECTRIC POINT-OF-USE TANK-STYLE WATER HEATERS



### GE20P08BAR GE REALMAX CHOICE 18-GALLON ELECTRIC POINT-OF-USE TANK-STYLE

- Stainless steel heating element
- Anode rod
- Optional 6' cord included
- Whole home flexibility
- Built-to-last warranty
- Easy installation
- Hot water booster
- Drain valve
- 120 voltage (MAX)



### GE10P08BAR GE REALMAX CHOICE 10-GALLON ELECTRIC POINT-OF-USE TANK-STYLE

- Stainless steel heating element
- Anode rod
- Optional 6' cord included
- Built-to-last warranty
- Easy installation
- Hot water booster
- Drain valve
- 120 voltage (MAX)



### GE06P08BAR GE 6-GALLON ELECTRIC POINT-OF-USE TANK-STYLE

- Stainless steel heating element
- Anode rod
- Optional 6' cord included
- Built-to-last warranty
- Easy installation
- Hot water booster
- Wall or floor mount
- Intuitive controls
- 120 voltage (MAX)



### GE02P08BAR GE 2.5-GALLON ELECTRIC POINT-OF-USE TANK-STYLE

- Stainless steel heating element
- Anode rod
- 6' cord factory installed on 2.5G
- Built-to-last warranty
- Easy installation
- Hot water booster
- Wall or floor mount
- Intuitive controls
- 120 Voltage (MAX)




# ELECTRIC WATER HEATERS

## FEATURE HIGHLIGHTS



### REAL CAPACITY

Get the most hot showers from the only water heaters that hold a real 50, 40 or 30 gallons of water.\*



### BUILT-IN WIFI

Easily adjust temperatures, set vacation mode schedules and receive notifications with built-in WiFi powered by SmartHQ™.



### HIGH FIRST HOUR RATING (FHR)\*\*

Live comfortably with these best-in-class units that deliver a high volume of hot water in the first hour.



### QUICK RECOVERY

Two 5500W heating elements quickly increase water temperature for hot water when you need it.



### ANODE SENSING

Durable design offers long-lasting protection against corrosion.



### DIGITAL DISPLAY

Make easy, accurate adjustments at the touch of a button.



### STAINLESS STEEL HEATING ELEMENTS

Ultra-durable stainless steel heating elements resist rust and corrosion.



### BRASS DRAIN VALVE

Rustproof construction can be counted on to provide long-lasting service.



### EASY SETUP

Replace the old water heater quickly and easily using standard water and electrical connections.

\*Compared to 50, 40 and 30 gallon electric steel tank water heaters per DOE rated gallon capacity.  
\*\*First Hour Rating (FHR) test simulates hot water usage and indicates how many gallons of water are delivered in one hour before water temperature drops from 125°F to 110°F.



GE ELECTRIC WATER HEATERS



**GE50T12BLM**  
**GE 50-GALLON RATED CAPACITY TALL**

- Family size 3 to 5\*
- Electronic controls
- Built-in WiFi powered by SmartHQ™
- Normal/Vacation modes
- Two 5,500-watt stainless steel heating elements
- 78-gallon First Hour Rating
- Sensing anode rod
- Brass drain valve

**GE50T10BLM** (not shown)  
• Two 5,500-watt copper heating elements

**GE50T10BAM** (not shown)  
• Thermostat

**GE50T08BAM** (not shown)  
• Thermostat

- Standard anode rod
- Two 5,500-watt stainless steel heating elements
- Brass drain valves
- Two 5,500-watt copper heating elements



**GE50S12BLM**  
**GE 50-GALLON RATED CAPACITY SHORT**

- Family size 3 to 5\*
- Electronic controls
- Built-in WiFi powered by SmartHQ
- Normal/Vacation modes
- Two 5,500-watt stainless steel heating elements
- 75-gallon First Hour Rating
- Sensing anode rod
- Brass drain valve

**GE50S10BLM** (not shown)  
• Two 5,500-watt copper heating elements

**GE50S10BAM** (not shown)  
• Thermostat

**GE50S08BAM** (not shown)  
• Thermostat

- Standard anode rod
- Two 5,500-watt stainless steel heating elements
- Brass drain valves
- Two 5,500-watt copper heating elements



**GE40T12BLM**  
**GE 40-GALLON RATED CAPACITY TALL**

- Family size 2 to 4\*
- Electronic controls
- Built-in WiFi powered by SmartHQ
- Normal/Vacation modes
- Two 5,500-watt stainless steel heating elements
- 66-gallon First Hour Rating
- Sensing anode rod
- Brass drain valve

**GE40T10BLM** (not shown)  
• Two 5,500-watt copper heating elements

**GE40T10BAM** (not shown)  
• Thermostat

**GE40T08BAM** (not shown)  
• Thermostat

- Standard anode rod
- Two 5,500-watt stainless steel heating elements
- Brass drain valves
- Two 5,500-watt copper heating elements



**GE40S12BLM**  
**GE 40-GALLON RATED CAPACITY SHORT**

- Family size 2 to 4\*
- Electronic controls
- Built-in WiFi powered by SmartHQ
- Normal/Vacation modes
- Two 5,500-watt stainless steel heating elements
- 65-gallon First Hour Rating
- Sensing anode rod
- Brass drain valve

**GE40S10BLM** (not shown)  
• Two 5,500-watt copper heating elements

**GE40S10BAM** (not shown)  
• Thermostat

**GE40S08BAM** (not shown)  
• Thermostat

- Standard anode rod
- Two 5,500-watt stainless steel heating elements
- Brass drain valves
- Two 5,500-watt copper heating elements



**GE30T12BLM**  
**GE 30-GALLON RATED CAPACITY TALL**

- Family size 1 to 3\*
- Electronic controls
- Built-in WiFi powered by SmartHQ
- Normal/Vacation modes
- Two 5,500-watt stainless steel heating elements
- 59-gallon First Hour Rating
- Sensing anode rod
- Brass drain valve

**GE30T10BLM** (not shown)  
• Two 5,500-watt copper heating elements

**GE30T10BAM** (not shown)  
• Thermostat

**GE30T08BAM** (not shown)  
• Thermostat

- Standard anode rod
- Two 5,500-watt stainless steel heating elements
- Brass drain valves
- Two 5,500-watt copper heating elements



**GE30S12BLM**  
**GE 30-GALLON RATED CAPACITY SHORT**

- Family size 1 to 3\*
- Electronic controls
- Built-in WiFi powered by SmartHQ
- Normal/Vacation modes
- Two 5,500-watt stainless steel heating elements
- 60-gallon First Hour Rating
- Sensing anode rod
- Brass drain valve

**GE30S10BLM** (not shown)  
• Two 5,500-watt copper heating elements

**GE30S10BAM** (not shown)  
• Thermostat

**GE30S08BAM** (not shown)  
• Thermostat

- Standard anode rod
- Two 5,500-watt stainless steel heating elements
- Brass drain valves
- Two 5,500-watt copper heating elements

\*Household sizing based on back-to-back showers, 8 minutes long. Complete features and specifications on pages 390–391. For definitions of logos, see page 13.



# FLEXIBLE-CAPACITY ELECTRONIC WATER HEATERS


Up to 60% more hot water on X-High setting\*

## FEATURE HIGHLIGHTS




### FLEXIBLE CAPACITY

Choose from three capacity settings to enjoy up to 60% additional hot water when you need it.\*



### INTEGRATED, ELECTRONIC MIXING VALVE

Access additional hot water to accommodate guests with a valve that lets users select from three capacity settings: Normal, High and X-High.



### BUILT-IN WIFI

Easily change water capacity setting, adjust temperatures, set vacation mode, set schedules and receive notifications with built-in WiFi powered by SmartHQ™.

## FLEXIBLE-CAPACITY ELECTRONIC WATER HEATERS



- GE50S10BMM**  
**GE 50-GALLON RATED CAPACITY**
- Integrated, electronic mixing valve
  - Performs like an 80-gallon on X-High setting\*
  - Up to 60% more hot water on X-High setting\*
  - Family size: 3 to 6\*\*
  - Electronic controls
  - Built-in WiFi powered by SmartHQ
  - Normal/Vacation modes
  - 75-gallon First Hour Rating
  - Two 5,500-watt stainless steel heating elements
  - Brass drain valve



- GE40S10BMM**  
**GE 40-GALLON RATED CAPACITY**
- Integrated, electronic mixing valve
  - Performs like a 64-gallon on X-High setting\*
  - Up to 60% more hot water on X-High setting\*
  - Family size: 2 to 5\*\*
  - Electronic controls
  - Built-in WiFi powered by SmartHQ
  - Normal/Vacation modes
  - 65-gallon First Hour Rating
  - Two 5,500-watt stainless steel heating elements
  - Brass drain valve



- GE30S10BMM**  
**GE 30-GALLON RATED CAPACITY**
- Integrated, electronic mixing valve
  - Performs like a 48-gallon on X-High setting\*
  - Up to 60% more hot water on X-High setting\*
  - Family size: 1 to 4\*\*
  - Electronic controls
  - Built-in WiFi powered by SmartHQ
  - Normal/Vacation modes
  - 59-gallon First Hour Rating
  - Two 5,500-watt stainless steel heating elements
  - Brass drain valve

\*Versus comparable water heater without mixing valve at 120° F setting and 58° F inlet water temperature. Not all features available on all models.

\*\*Household sizing based on back-to-back showers, 8 minutes long. Complete features and specifications on page 391. For definitions of logos, see page 13.





# TANKLESS ELECTRIC WATER HEATERS

## FEATURE HIGHLIGHTS



### UNLIMITED HOT WATER ON DEMAND

Tankless electric water heater provides instant, continuous water flow.



### ENERGY EFFICIENT

Conserves energy and water by only using energy when hot water is in use, saving you money.



### SELF-MODULATING TECHNOLOGY

Utilizes inlet and outlet temperature sensors to optimize energy usage and keep water temperature consistent.



### INTUITIVE DESIGN

Adjust temperature and settings with easy-to-use touch screen.



### SPACE SAVER

Compact design takes up significantly less space than a tank-style water heater.



### SCALE REDUCTION TECHNOLOGY

Extends the life of the unit by shielding heating elements from water and scale buildup.



### PERFORMANCE\*

Enough to run three showers and one faucet simultaneously in warm climates.



### POINT OF USE

Installs at the point of use, for hot water where you need it.



### WHOLE HOME SOLUTION

Large sizes easily provide enough hot water for a small house or apartment.

\*Results are based on 72°F inlet water temperature and 105°F outlet water temperature, in one hour before water temperature drops from 125°F to 110°F.

TANKLESS ELECTRIC WATER HEATERS



**GE04SNLPDG**  
GE TANKLESS ELECTRIC POINT-OF-USE WATER HEATER

- Instant hot water on demand
- 3.5 kW
- Operates on 120V
- Touch screen and remote control
- Ideal for under the sink and booster for washer or long pipe runs
- Up to 0.7 GPM (gallons per minute)\*
- Enough for one sink\*



**GE06SNLPDG**  
GE TANKLESS ELECTRIC POINT-OF-USE WATER HEATER

- Instant hot water on demand
- 5.5 kW
- Touch screen and remote control
- Ideal for under the sink and booster for washer or long pipe runs
- Up to 1.2 GPM (gallons per minute)\*
- Enough for two sinks or one shower\*



**GE15SNHPDG**  
GE TANKLESS ELECTRIC POINT OF USE WATER HEATER

- Instant hot water on demand
- 14.6 kW
- Touch screen and remote control
- Ideal for under the sink and booster for washer or long pipe runs
- Up to 2.9 GPM (gallons per minute)\*
- Enough for two sinks and one shower\*



**GE18SNHPDG**  
GE TANKLESS ELECTRIC WHOLE HOME SOLUTION WATER HEATER

- Instant hot water on demand
- 18 kW
- Touch screen
- Ideal for under the sink, small home, apartment, condo
- Booster for laundry or long pipe runs
- Up to 3.8 GPM (gallons per minute)\*
- Enough for one sink and two showers\*



**GE08SNHPDG**  
GE TANKLESS ELECTRIC POINT-OF-USE WATER HEATER

- Instant hot water on demand
- 8 kW
- Touch screen and remote control
- Ideal for under the sink and booster for washer or long pipe runs
- Up to 1.7 GPM (gallons per minute)\*
- Enough for one sink and one shower\*



**GE11SNHPDG**  
GE TANKLESS ELECTRIC POINT-OF-USE WATER HEATER

- Instant hot water on demand
- 11 kW
- Touch screen and remote control
- Ideal for under the sink and booster for washer or long pipe runs
- Up to 2.5 GPM (gallons per minute)\*
- Enough for two sinks and one shower\*



**GE24DNHPDG**  
GE TANKLESS ELECTRIC WHOLE HOME SOLUTION WATER HEATER

- Instant hot water on demand
- 24 kW
- Touch screen
- Ideal for small home, apartment, condo
- Booster for laundry or long pipe runs
- Up to 5.3 GPM (gallons per minute)\*
- Enough for four sinks and two showers\*



**GE27DNHPDG**  
GE TANKLESS ELECTRIC WHOLE HOME SOLUTION WATER HEATER

- Instant hot water on demand
- 27 kW
- Touch screen
- Ideal for small home, apartment, condo
- Booster for laundry or long pipe runs
- Up to 5.4 GPM (gallons per minute)\*
- Enough for one sink and three showers\*


\*Results are based on 72° F inlet water temperature and 105° F outlet water temperature. Complete features and specifications on page 393.






# GEOSPRING™ SOLAR WATER HEATERS

## FEATURE HIGHLIGHTS

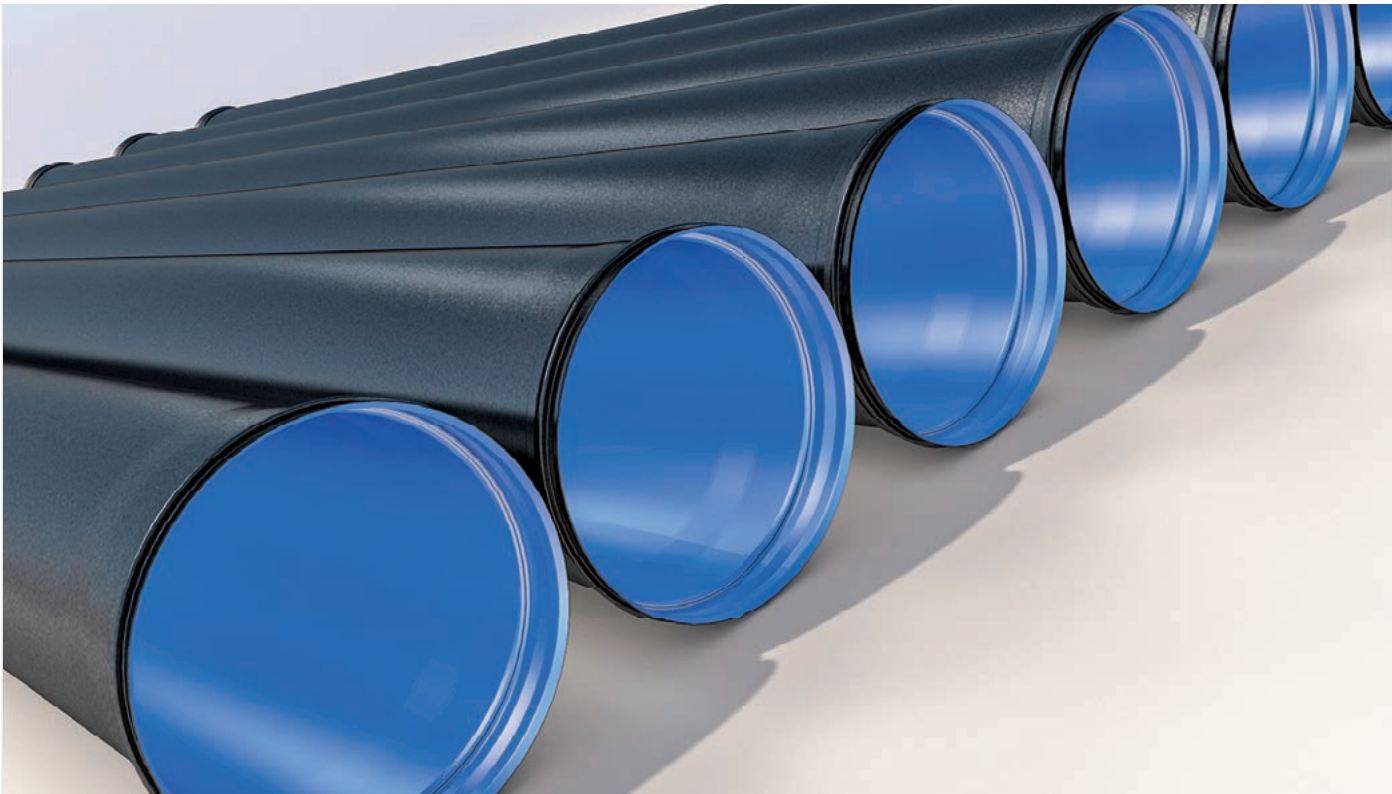


### INTERNAL TANK COATING

Resilient internal coating offers maximum corrosion resistance and trouble-free performance.

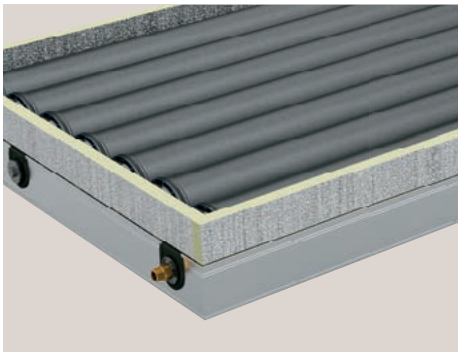

### STORAGE PIPES

An integrated solar collector allows the tank to maintain hot water temperatures even if the sun isn't shining.

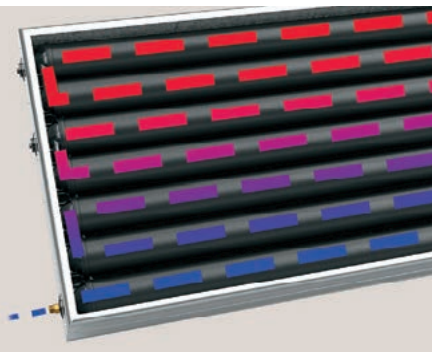

### SERPENTINE SYSTEM

Water is heated and stored directly in the solar collector, making hot water available as soon as it is heated by the sun.

REFRIGERATION

COOKING

DISHWASHERS

CLOTHES CARE

PACKAGE OPTIONS

WATER SYSTEMS


AIR CONDITIONERS




GEOSPRING™ SOLAR WATER HEATERS



- GT50C10BAM**  
**GE 51-GALLON WITH INTEGRATED COLLECTOR STORAGE**
- GeoSpring Solar technology
  - Solar glass for efficient water heating
  - Clear heat insulation delivers maximum heat retention
  - Integrated storage pipes maintain temperatures even when the sun is not shining
  - Serpentine system makes hot water available immediately
  - Internal tank coating offers maximum corrosion resistance

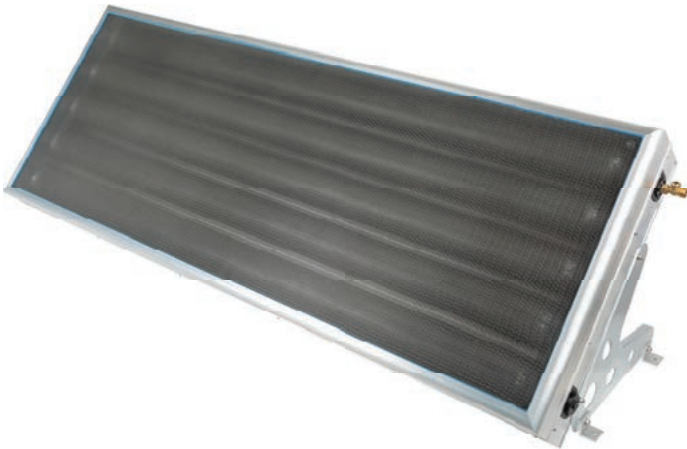

- GT40C10BAM**  
**GE 38-GALLON WITH INTEGRATED COLLECTOR STORAGE**
- GeoSpring Solar technology
  - Solar glass for efficient water heating
  - Clear heat insulation delivers maximum heat retention
  - Integrated storage pipes maintain temperatures even when the sun is not shining
  - Serpentine system makes hot water available immediately
  - Internal tank coating offers maximum corrosion resistance

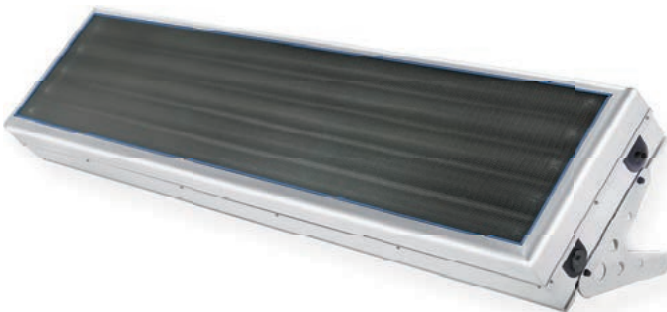

- GT25C10BAM**  
**GE 24-GALLON WITH INTEGRATED COLLECTOR STORAGE**
- GeoSpring Solar technology
  - Solar glass for efficient water heating
  - Clear heat insulation delivers maximum heat retention
  - Integrated storage pipes maintain temperatures even when the sun is not shining
  - Serpentine system makes hot water available immediately
  - Internal tank coating offers maximum corrosion resistance

\*Applies to 51-gallon model when paired with a tankless gas water heater. Complete features and specifications on page 393. For definitions of logos, see page 13.

ONE-OF-A-KIND DESIGN FOR VERSATILE INSTALLATION

Accommodate any roof style with a unit that’s easy to set up.



Pitched roof installation



Flat roof installation



Connected in parallel installation



Combined with additional storage tank installation



Ground mount installation

MOUNTING HARDWARE



ZERO DEGREE MOUNTING BRACKETS

For fixing unit securely to a pitched roof.



FLAT ROOF BRACKETS

Two different bracket sets for 30- or 45-degree positioning.

ACCESSORIES

Be sure to pair the right solar panel and accessories by selecting the roof type, making note of whether installation will take place in a high-wind area, and finishing the job with a protective cover to ensure years of reliable hot-water service.

STEP 1	CHOOSE A MODEL			GT50C10BAM	GT40C10BAM	GT25C10BAM
STEP 2	CHOOSE A MOUNTING	FLAT ROOF OR GROUND	45°	GT50CKM45	GT40CKM45	GT25CKM45
			30°	GT50CKM30	GT40CKM30	GT25CKM30
		PITCHED ROOF	0°	GT00CKMOO		
			HIGH WIND	GT50CKR + GT50CKHLZ	GT25CKR + GT25CKHL	
STEP 3	CHOOSE A PROTECTIVE COVER			GT50CKC	GT40CKC	GT25CKC





# WATER SOFTENERS

## FEATURE HIGHLIGHTS



### CUSTOM SELECT™ BLENDING VALVE

Allows you to select how soft you want your water.



### WIFI ALERTS AND REMOTE SHUTOFF

Receive alerts to your smartphone when there's a potential leak or running faucet.\*

\*Requires WiFi signal at softener location.



### SALT SAVER

Spend less time maintaining your system and more time enjoying it with Salt Saver, which reduces consumption.

## WATER SOFTENERS



- GXSHC40N**  
**GE SMART WATER SOFTENER**
- Built-in WiFi powered by SmartHQ™
  - Flow alerts—WiFi
  - Remote water shutoff—WiFi
  - GE Appliances' Custom Select blending valve allows you to select how soft you want your water
  - GE SmartSoft™ technology ensures there is always plenty of softened water available by "learning" a family's water-use patterns
  - Reduces scale, protects appliances/water heater, results in softer, brighter clothing
  - Low salt reminders—WiFi
  - Water consumption tracking—WiFi
  - 40,000 grain capacity
  - Up-front electronic controls with status indicator light
  - Self-cleaning sediment filter protects your home's plumbing
  - Plumbing connection up to 1-1/4"

**GXSH40V**  
Similar to the GXSHC40N, except no WiFi



- GXSH45V**  
**GE WATER SOFTENER**
- GE Appliances' Custom Select blending valve allows you to select how soft you want your water
  - GE SmartSoft technology ensures there is always plenty of softened water available by "learning" a family's water-use patterns
  - Uses up to 35% less water\*
  - Reduces scale, protects appliances/water heater, results in softer, brighter clothing
  - 45,100 grain capacity
  - Salt capacity: 230 lbs.
  - Up-front electronic controls with status indicator light
  - Self-cleaning sediment filter
  - Plumbing connection up to 1-1/4"

\*Versus previous GE Appliances water softeners and WQA water usage studies. Complete features and specifications on page 394. For definitions of logos, see pg. 13.



- GXMH31H**  
**GE WATER SOFTENER & FILTER IN ONE**
- Reduces chlorine taste and odor with built-in water filtration
  - GE Appliances' Custom Select blending valve allows you to select how soft you want your water
  - GE SmartSoft technology ensures there is always plenty of softened water available by "learning" a family's water-use patterns
  - Reduces scale, protects appliances/water heater, results in softer, brighter clothing
  - 31,100 grain capacity
  - Salt capacity: 230 lbs.
  - Up-front electronic controls with status indicator light
  - Self-cleaning sediment filter
  - Plumbing connection up to 1-1/4"



- GXSF30V**  
**GE WATER SOFTENER**
- GE SmartSoft technology ensures there is always plenty of softened water available by "learning" a family's water-use patterns
  - Uses up to 20% less water\*
  - Reduces scale, protects appliances/water heater, results in softer, brighter clothing
  - 30,400 grain capacity
  - Salt capacity: 200 lbs.
  - Plumbing connection up to 1"





# UNDER SINK WATER FILTRATION

## FEATURE HIGHLIGHTS




### FILTRATION WHERE YOU NEED IT MOST

Easily installs under most sinks.



### BETTER-TASTING WATER

Filtered water improves the flavor of coffee, tea, other beverages and food.



### PREMIUM FILTRATION

Removes impurities such as lead, PFOS, PFOA, select pharmaceuticals and more.

## UNDER SINK FILTRATION

PRODUCTS BELOW AVAILABLE ONLY THROUGH PARTS ACCOUNT UNLESS NOTED.



PREMIUM  
ADVANCED  
BASIC

- GXRQ18NBN**  
**GE REVERSE OSMOSIS FILTRATION SYSTEM**
- Reverse osmosis triple-stage filtration—water is filtered 3 times
  - Reduces 95 impurities that can be found in drinking water, including lead, PFOA/PFOS\*
  - Small footprint
  - NSF/ANSI certified
  - Easy-change filter—change filter in a snap with zero mess thanks to a twist lock design
  - Easy install
  - Filters included
  - Designer brushed nickel faucet
  - Replacement filters: FQ18MN and FQ18PN

USE APPLIANCE ACCOUNT GNRQ18NBN



PREMIUM  
ADVANCED  
BASIC

- GXK285JBL**  
**GE HIGH-FLOW FILTRATION SYSTEM**
- Dual-flow filtration process—1.1 gallons per minute
  - Lead reduction
  - Filtered water through existing faucet
  - Dedicated controller turns filtration on/off
  - Quick-replace filter—no water shutoff needed
  - Recommended filter replacement every 6 months
  - System includes: Filtration system, dual-flow filters, chrome filtration controller, batteries, tubing & fittings
  - Replacement filter: FQK2J

USE APPLIANCE ACCOUNT GNK285KBL



PREMIUM  
ADVANCED  
BASIC

- GXULQK**  
**GE HIGH-FLOW FAUCET FILTRATION SYSTEM**
- Lead reduction
  - Single-stage filtration means water is filtered once
  - High-flow filtered water through main faucet
  - Magnetic filter change reminder light
  - Quick-replace filter—no water shutoff needed
  - Recommended filter replacement every 6 months or 2,000 gallons
  - Filter included
  - Replacement filter: GXULQR



PREMIUM  
ADVANCED  
BASIC

- GXK185KBL**  
**GE SINGLE-STAGE DRINKING WATER FILTRATION SYSTEM**
- Lead reduction
  - Filtered water through existing faucet
  - Dedicated controller turns filtration on/off
  - Quick-replace filter—no water shutoff needed
  - Recommended filter replacement every 6 months
  - System includes: Filtration system, dual-flow filters, chrome filtration controller, batteries, tubing & fittings
  - Replacement filter: FQK1K



PREMIUM  
ADVANCED  
BASIC

- GX1S01R**  
**GE DRINKING WATER FILTRATION SYSTEM**
- Lead reduction with FXUVC or FXULC
  - System installs below kitchen sink
  - Filtered water recommended through dedicated faucet (UNFCTFBL - Faucet sold separately)
  - 6-month filter life (varies with local water conditions)
  - Filter not included
  - Replacement filters: FXUVC (Advanced) FXULC (Advanced) FXUTC (Basic)





# WHOLE HOUSE FILTRATION

## FEATURE HIGHLIGHTS



### CLEAN WATER IN EVERY ROOM

Filter water at the source for better-tasting water with fewer impurities\* at every faucet.

\*Impurities not necessarily in all users' water.



### WIFI ALERTS AND REMOTE WATER SHUTOFF

Receive alerts to your smartphone when there's a potential leak or running faucet.\*\*

\*\*Requires WiFi signal at filter location.



### EASY INSTALLATION

Install the system in minutes with push-to-connect fittings and rotating pivot head.

## WHOLE HOUSE FILTRATION

PRODUCTS BELOW AVAILABLE ONLY THROUGH PARTS ACCOUNT UNLESS NOTED.



PREMIUM  
ADVANCED  
BASIC

### GXWH70M

#### GE SMART WHOLE HOUSE STANDARD-FLOW FILTRATION SYSTEM

- Built-in WiFi powered by SmartHQ™ (leak detection, remote water shutoff, consumption tracking, filter change reminders)
- Lead reduction with FTHLM
- Easy install (push-to-connect fittings)
- High or standard flow
- Premium filtration (filter sold separately)
- 3-position valve with bypass option for drier filter change
- Filter not included
- Compatible filters: FTHLM (Premium) FTHTM (Advanced) FTHPM (Basic)

USE APPLIANCE ACCOUNT GXWH70M



PREMIUM  
ADVANCED  
BASIC

### GXWH50M

#### GE WHOLE HOUSE STANDARD-FLOW FILTRATION SYSTEM

- Lead reduction with FTHLM
- Easy install (push-to-connect fittings)
- High or standard flow
- Premium filtration (filter sold separately)
- 3-position valve with bypass option for drier filter change
- Includes magnetic filter reminder light
- Filter not included
- Compatible filters: FTHLM (Premium) FTHTM (Advanced) FTHPM (Basic)



PREMIUM  
ADVANCED  
BASIC

### GXWH40L

#### GE HIGH-FLOW WHOLE HOUSE FILTRATION SYSTEM WITH CLEAR SUMP

- High flow
- Customize filtration (filter sold separately)
- Clear sump to view filter soil level—reduces dirt, silt, sand and rust from your water
- 3-position valve with bypass option and red pressure release button for drier filter change
- Includes magnetic filter reminder light, wrench and mounting bracket
- Filter not included
- Compatible filters: FXHTC (Advanced) FXHSC (Basic)



PREMIUM  
ADVANCED  
BASIC

### GXWH35F

#### GE HIGH-FLOW WHOLE HOUSE FILTRATION SYSTEM

- High flow
- Customize filtration (filter sold separately)
- Reduces dirt, silt, sand and rust from your water
- Red pressure release button for drier filter change
- Includes magnetic filter reminder light, wrench and mounting bracket
- Filter not included
- Compatible filters: FXHTC (Advanced) FXHSC (Basic)



PREMIUM  
ADVANCED  
BASIC

### GXWH20S

#### GE STANDARD-FLOW WHOLE HOUSE FILTRATION SYSTEM WITH CLEAR SUMP

- Standard flow
- FXUSC filter included
- Clear sump to view filter soil level—reduces dirt, silt, sand and rust from your water
- 3-position valve with bypass option and red pressure release button for drier filter change
- Includes magnetic filter reminder light, wrench and mounting bracket
- Filter included
- Compatible filters: FXWTC (Advanced) FXUSC (Basic) FXWPC (Basic) FXWSC (Basic)



PREMIUM  
ADVANCED  
BASIC

### GXWH04F

#### GE STANDARD-FLOW WHOLE HOUSE FILTRATION SYSTEM

- Standard flow
- Customize filtration (filter sold separately)
- Reduces dirt, silt, sand and rust from your water
- Red pressure release button for drier filter change
- Includes magnetic filter reminder light, wrench and mounting bracket
- Filter not included
- Compatible filters: FXWTC (Advanced) FXUSC (Basic) FXWPC (Basic) FXWSC (Basic)

Standard flow = 3/4" plumbing. High flow = 1" plumbing. Complete features and specifications on pages 394–396. **Bold = feature upgrade from previous model.**





**CONSUMER  
COMFORT  
PRODUCTS**





FEATURE HIGHLIGHTS



ULTRA-QUIET OPERATION

Operating at sounds as low as 40 dB, our window air conditioners deliver maximum comfort and minimum noise.



CONNECTED PEACE OF MIND


Integration with the SmartHQ™ app allows you to monitor, schedule and control your connected air conditioner from anywhere.



MAXIMUM COMFORT COOL


Energy-efficient cooling with three cooling and three fan speeds that provide flexible and optimal home comfort.

Industry Exclusive!  
FLEX-DEPTH CLEARVIEW™ WINDOW AIR CONDITIONERS

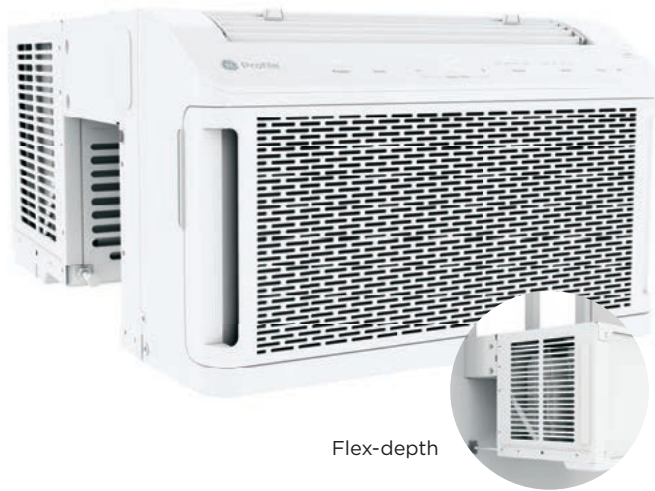

Flex-depth

- AHTT06BC**  
**GE PROFILE™ CLEARVIEW WINDOW UNIT**
- 6,000 BTU, Small rooms up to 250 sq. ft.
  - Sits below window sill for unobstructed window view
  - Industry-exclusive flex-depth design accommodates wall thickness between 4.5" to 13.75"
  - Ultra-quiet operation
  - Voice Control capability with Alexa & Google
  - Electronic thermostat with cap touch digital controls
  - Connected peace of mind
  - Remote control
  - 3 cool/3 fan speeds
  - EZ Installation
  - Clean filter reminder, power interruption restart, 24-hour on/off timer

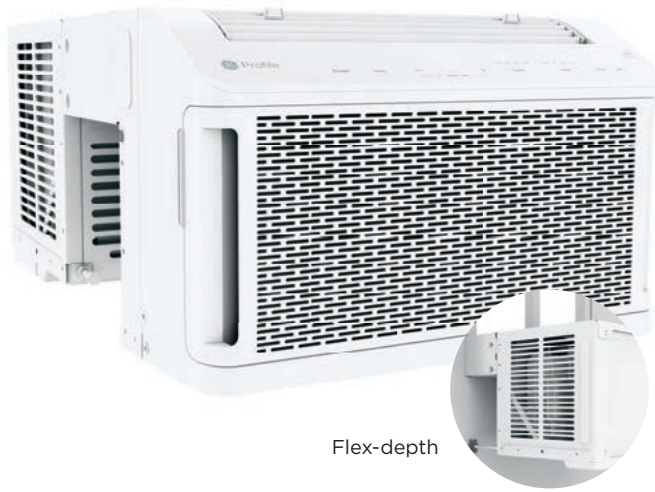

Flex-depth

- AHTT08BC**  
**GE PROFILE CLEARVIEW WINDOW UNIT**
- 8,000 BTU, Medium rooms up to 350 sq. ft.
  - Sits below window sill for unobstructed window view
  - Industry-exclusive flex-depth design accommodates wall thickness between 4.5" to 13.75"
  - Ultra-quiet operation
  - Voice Control capability with Alexa & Google
  - Electronic thermostat with cap touch digital controls
  - Connected peace of mind
  - Remote control
  - 3 cool/3 fan speeds
  - EZ Installation
  - Clean filter reminder, power interruption restart, 24-hour on/off timer



While limited quantities last.  
Complete features and specifications on page 397.  
For definitions of logos, see page 13.




ULTRA-QUIET ROOM AIR CONDITIONERS Seasonal Availability Only




- PHC06LY**  
**GE PROFILE™ SMART WINDOW UNIT**
- 6,150 BTU, 11.5 CEER, 115 Volts
  - Fixed chassis
  - Quietest in the Industry\*
  - Electronic digital thermostat with remote
  - EZ Mount window kit
  - Connected peace of mind
  - Connected performance
  - Voice control capability with Alexa and Google
  - Auto dimming
  - Filter reminder
  - Delay function



- PHC08LY**  
**GE PROFILE SMART WINDOW UNIT**
- 8,100 BTU, 11.4 CEER, 115 Volts
  - Fixed chassis
  - 50% quieter than similar GE models\*\*
  - Electronic digital thermostat with remote
  - EZ Mount window kit
  - Connected peace of mind
  - Connected performance
  - Voice control capability with Alexa and Google
  - Auto dimming
  - Filter reminder
  - Delay function

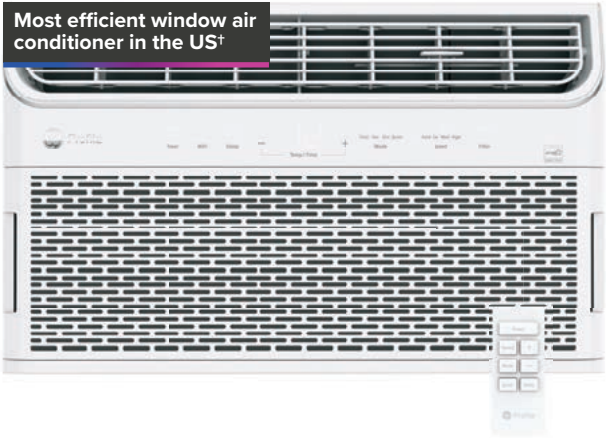

- AHTR10AC**  
**GE PROFILE INVERTER WINDOW UNIT**
- 10,000 BTU, Medium rooms up to 450 sq. ft.
  - 15.7 CEER—41% more efficient\*\*\*
  - 40 dBs Noise Rating
  - Voice Control capability with Alexa & Google
  - Electronic thermostat with digital controls
  - Remote control
  - 3 cool/3 fan speeds
  - EZ Mount window installation kit included
  - Clean filter reminder, power interruption restart, 24-hour on/off timer, 4-way adjustable airflow

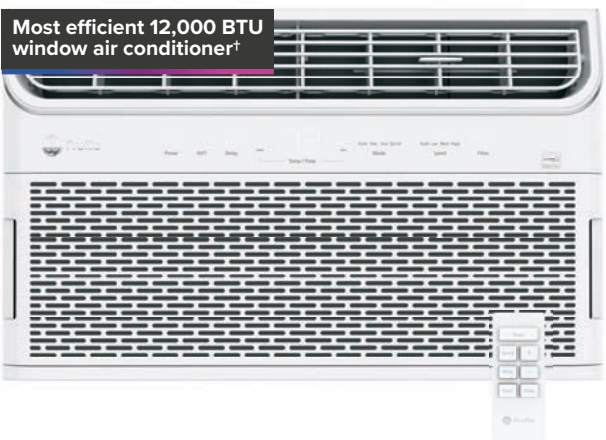


- AHTR12AC**  
**GE PROFILE INVERTER WINDOW UNIT**
- 12,000 BTU, Large rooms up to 550 sq. ft.
  - 15.4 CEER—44% more efficient\*\*\*
  - 40 dBs Noise Rating
  - Voice Control capability with Alexa & Google
  - Electronic thermostat with digital controls
  - Remote control
  - 3 cool/3 fan speeds
  - EZ Mount window installation kit included
  - Clean filter reminder, power interruption restart, 24-hour on/off timer, 4-way adjustable airflow



\*Based on published data.  
\*\*Based on perceived loudness.  
\*\*\*Than DOE minimum efficiency model of comparable capacity.  
†Based on July 2021 ENERGY STAR® listing of window air conditioners. While limited quantities last.  
Complete features and specifications on page 397.  
For definitions of logos, see page 13.



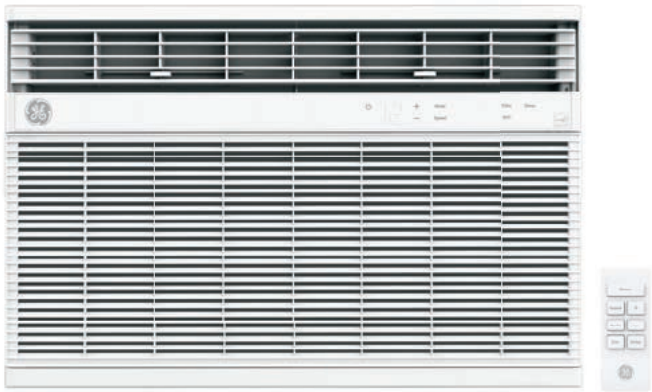


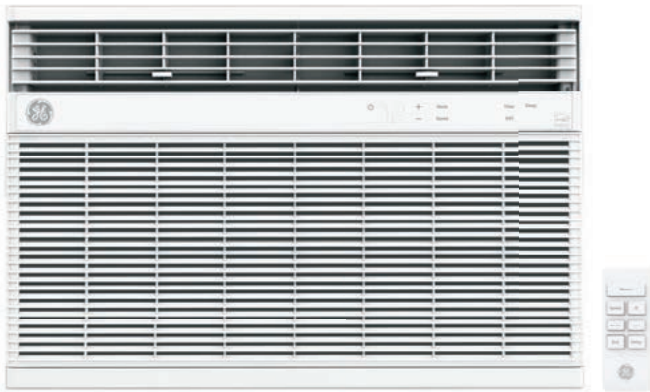
WINDOW ROOM AIR CONDITIONERS Seasonal Availability Only



**AHFK24BA**  
**GE SMART ELECTRONIC UNIT**




- 23,500/22,900 BTU, 9.8 CEER, 230/208 Volts
- Electronic digital thermostat with remote
- 3 cool/3 fan speeds
- EZ Mount window kit with slide-out chassis
- Energy Saver feature
- Filter reminder light
- Power interruption restart
- R32 refrigerant
- 24-hour on/off timer






**AHFK18BA**  
**GE SMART ELECTRONIC UNIT**




- 18,000/17,800 BTU, 11.3 CEER, 230/208 Volts
- Electronic digital thermostat with remote
- 3 cool/3 fan speeds
- EZ Mount window kit with slide-out chassis
- Energy Saver feature
- Filter reminder light
- Power interruption restart
- R32 refrigerant
- 24-hour on/off timer

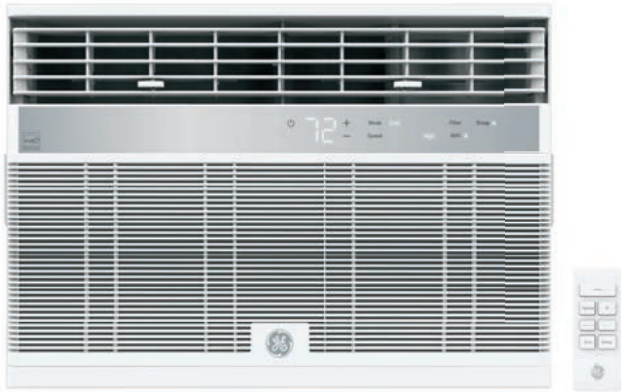




**AHY10LZ**  
**GE SMART ELECTRONIC UNIT**




- 10,000 BTU, 11.4 CEER, 115 Volts
- Electronic digital thermostat with remote
- 3 cool/3 fan speeds
- EZ Mount window kit with fixed chassis
- Energy Saver feature
- Filter reminder light
- Power interruption restart
- R32 refrigerant
- 24-hour on/off timer

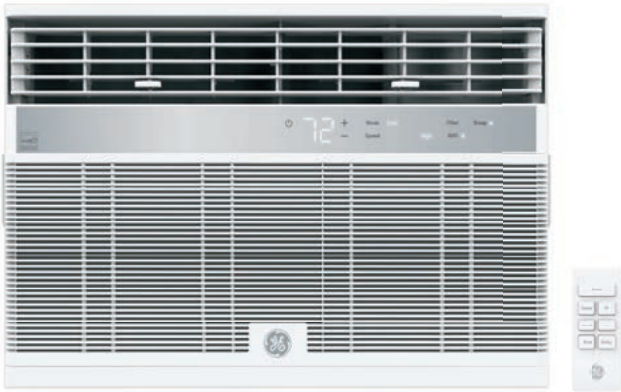




**AHY08LZ**  
**GE SMART ELECTRONIC UNIT**




- 8,000 BTU, 11.4 CEER, 115 Volts
- Electronic digital thermostat with remote
- 3 cool/3 fan speeds
- EZ Mount window kit with fixed chassis
- Energy Saver feature
- Filter reminder light
- Power interruption restart
- R32 refrigerant
- 24-hour on/off timer

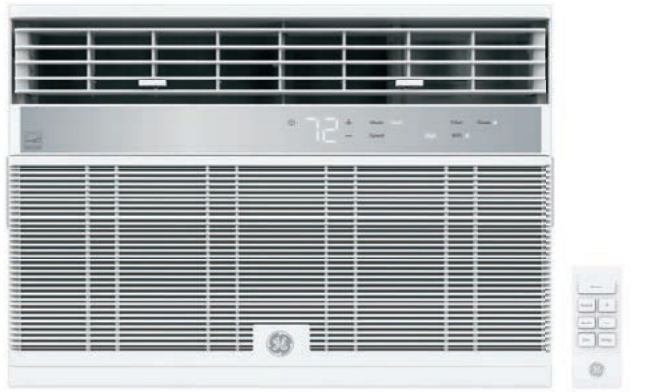




**AHY14LZ**  
**GE SMART ELECTRONIC UNIT**




- 14,000 BTU, 11.3 CEER, 115 Volts
- Electronic digital thermostat with remote
- 3 cool/3 fan speeds
- EZ Mount window kit with fixed chassis
- Energy Saver feature
- Filter reminder light
- Power interruption restart
- R32 refrigerant
- 24-hour on/off timer

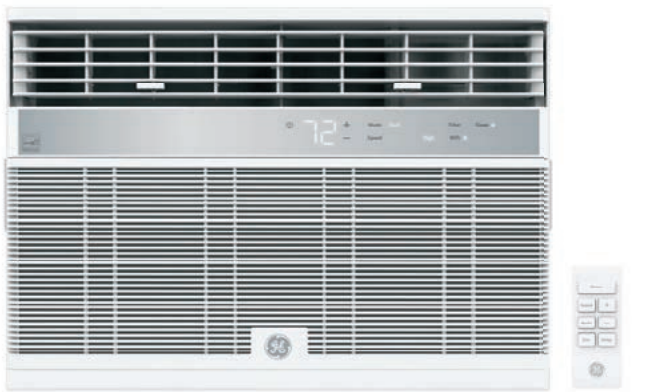



**AHY12LZ**  
**GE SMART ELECTRONIC UNIT**


- 12,000 BTU, 11.4 CEER, 115 Volts
- Electronic digital thermostat with remote
- 3 cool/3 fan speeds
- EZ Mount window kit with fixed chassis
- Energy Saver feature
- Filter reminder light
- Power interruption restart
- R32 refrigerant
- 24-hour on/off timer





**AHQ06LZ**  
**GE ELECTRONIC UNIT**

- 6,000 BTU, 11.1 CEER, 115 Volts
- Electronic digital thermostat with remote
- 3 cool/3 fan speeds
- EZ Mount window kit with fixed chassis
- Energy Saver feature
- Power interruption restart
- R32 refrigerant
- 24-hour on/off timer

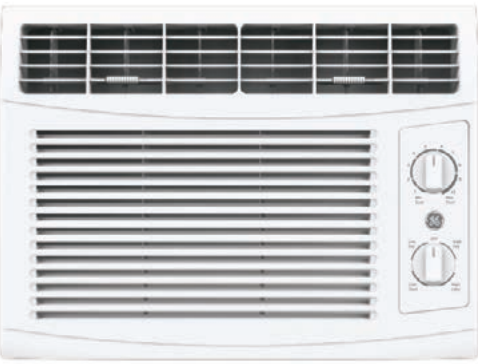


**AHV05LZ**  
**GE MECHANICAL UNIT**


- 5,050 BTU, 11.0 CEER, 115 Volts
- Mechanical thermostat
- 2 cool/2 fan speeds
- EZ Mount window kit with fixed chassis
- R32 refrigerant

While limited quantities last.  
Complete features and specifications on pages 397-398.  
For definitions of logos, see page 13.


HEAT/COOL WINDOW ROOM AIR CONDITIONERS Seasonal Availability Only

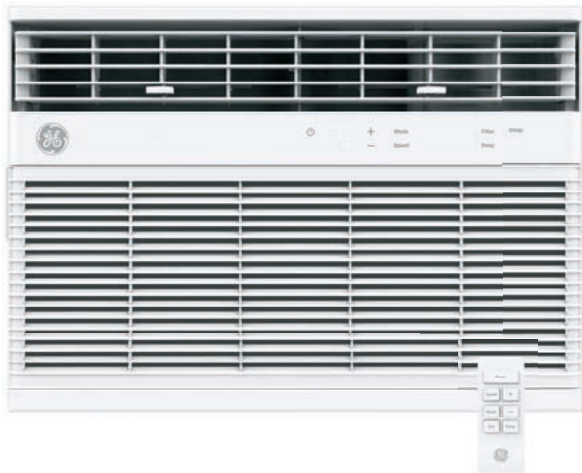


- AHE24DZ**  
**GE HEAT/COOL UNIT\***
- 23,500 BTU (Cool), 9.4 CEER, 230/208 Volts
  - 11,000/8,500 BTU (Heat)
  - Electronic digital thermostat with remote
  - Energy Saver feature
  - 3 cool/3 heat/3 fan speeds
  - EZ Mount window kit with slide-out chassis
  - Non-ozone-depleting refrigerant (R-410A)
  - Easy-access filter

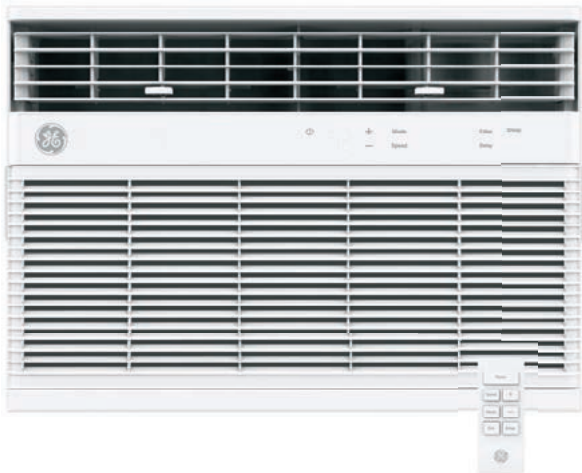

- AHE18DZ**  
**GE HEAT/COOL UNIT\***
- 18,000 BTU (Cool), 10.7 CEER, 230/208 Volts
  - 11,000/8,500 BTU (Heat)
  - Electronic digital thermostat with remote
  - Energy Saver feature
  - 3 cool/3 heat/3 fan speeds
  - EZ Mount window kit with slide-out chassis
  - Non-ozone-depleting refrigerant (R-410A)
  - Easy-access filter

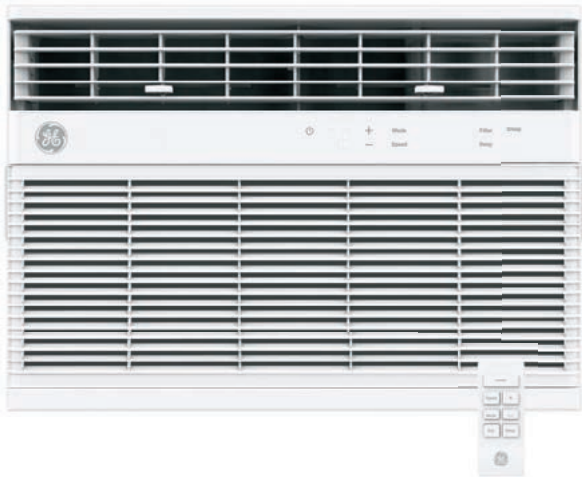

- AHE12DZ**  
**GE HEAT/COOL UNIT\***
- 12,000 BTU (Cool), 10.9 CEER, 230/208 Volts
  - 10,700/8,700 BTU (Heat)
  - Electronic digital thermostat with remote
  - Energy Saver feature
  - 3 cool/3 heat/3 fan speeds
  - EZ Mount window kit with slide-out chassis
  - Non-ozone-depleting refrigerant (R-410A)
  - Easy-access filter

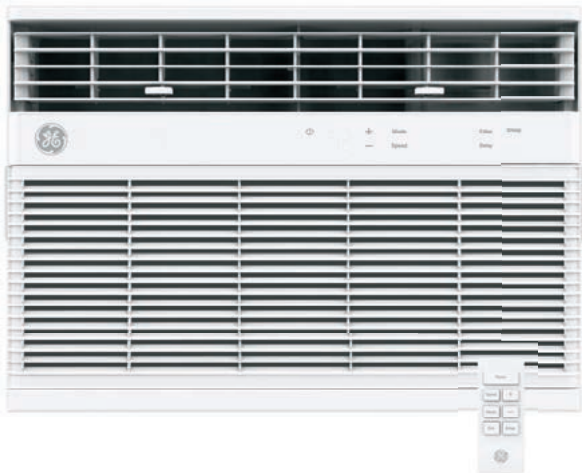

- AHE08AZ**  
**GE HEAT/COOL UNIT\***
- 8,000 BTU (Cool), 10.9 CEER, 115 Volts
  - 3,700 BTU (Heat)
  - Adjustable thermostat
  - Electronic digital thermostat with remote
  - Energy Saver feature
  - 3 cool/3 heat/3 fan speeds
  - EZ Mount window kit with slide-out chassis
  - Non-ozone-depleting refrigerant (R-410A)
  - Easy-access filter



\*Not intended to be a primary source of heat.  
While limited quantities last.  
Complete features and specifications on page 398.  
For definitions of logos, see page 13.





# PORTABLE ROOM AIR CONDITIONERS

Seasonal Availability Only

## FEATURE HIGHLIGHTS



### 3-IN-1 FUNCTIONALITY

Built-in air conditioning, three fan speeds, and dehumidifying capabilities provide flexible and optimal home comfort.



### CONNECTED PEACE OF MIND

Integration with the SmartHQ™ app allows you to monitor and control your connected air conditioner from anywhere.



### AUTO-EVAPORATION TECHNOLOGY

Under most room conditions, the Auto Evaporation Technology evaporates any water the portable unit collects, so there's no need to drain excess water.

## PORTABLE ROOM AIR CONDITIONERS



- APFA08YBMW**  
**GE PORTABLE AIR CONDITIONER**
- 8,000 ASHRAE, 5,000 SACC
  - Cools up to 150 sq. ft.
  - Cools a small-size room (10 ft. x 15 ft.)
  - 2 cool/2 fan speeds
  - Auto evaporative technology
  - Cool and dehumidify
  - Full-function remote
  - 24-hour timer
  - Single hose unit
  - CEC Compliant



- APFA10YBMW**  
**GE PORTABLE AIR CONDITIONER**
- 9,000 ASHRAE, 6,000 SACC
  - Cools up to 250 sq. ft.
  - Cools a small-size room (12 ft. x 20 ft.)
  - 2 cool/2 fan speeds
  - Auto evaporative technology
  - Cool and dehumidify
  - Full-function remote
  - 24-hour timer
  - Single hose unit
  - CEC Compliant



- APCA10YBMW**  
**GE PORTABLE AIR CONDITIONER**
- 10,000 ASHRAE, 7,000 SACC
  - Cools up to 300 sq. ft.
  - Cools a medium-size room (15 ft. x 20 ft.)
  - 3 cool/3 fan speeds
  - Auto evaporative technology
  - Cool and dehumidify
  - Full-function remote
  - 24-hour timer
  - Single hose unit
  - CEC Compliant



- APCA11YBMW**  
**GE PORTABLE AIR CONDITIONER**
- 11,000 ASHRAE, 7,800 SACC
  - Cools up to 350 sq. ft.
  - Cools a medium-size room (16 ft. x 22 ft.)
  - 3 cool/3 fan speeds
  - Auto evaporative technology
  - Cool and dehumidify
  - Full-function remote
  - 24-hour timer
  - Single hose unit
  - CEC Compliant



- APCA14YBMW**  
**GE PORTABLE AIR CONDITIONER**
- 14,000 ASHRAE, 10,000 SACC
  - Cools up to 450 sq. ft.
  - Cools a medium-size room (20 ft. x 22 ft.)
  - 3 cool/3 fan speeds
  - Auto evaporative technology
  - Cool and dehumidify
  - Full-function remote
  - 24-hour timer
  - Single hose unit
  - CEC Compliant



- APWA14YBMW**  
**GE PORTABLE SMART AIR CONDITIONER**
- 14,000 ASHRAE, 10,000 SACC
  - Cools up to 450 sq. ft.
  - Cools a medium-size room (20 ft. x 22 ft.)
  - Connected peace of mind
  - 3 cool/3 fan speeds
  - Auto evaporative technology
  - Cool and dehumidify
  - Full-function remote
  - 24-hour timer
  - Single hose unit
  - CEC Compliant



- APSA13YBMW**  
**GE PORTABLE AIR CONDITIONER**
- 14,000 ASHRAE, 9,800 SACC
  - Cools and heats up to 450 sq. ft.
  - Cools and heats a medium-size room (20 ft. x 22 ft.)
  - 3 cool/3 heat/3 fan speeds
  - Auto evaporative technology
  - Cool and dehumidify
  - Full-function remote
  - 24-hour timer
  - Single hose unit
  - CEC Compliant



While limited quantities last.  
Complete features and specifications on page 399.  
For definitions of logos, see page 13.





# DEHUMIDIFIERS

Seasonal Availability Only

## FEATURE HIGHLIGHTS



### CONTINUOUS DRAIN CONNECTION

Continuously drain water out and away from your unit with a convenient garden hose connection.



### CONNECTED PEACE OF MIND

Integration with the SmarthQ™ app allows you to monitor and control your smart dehumidifier from anywhere.



### EASE OF USE

Pocket handles make it easy to transport between rooms. Other features like adjustable humidistat, 3 fan speeds, auto restart and auto defrost provide ease of use and effective moisture removal from rooms.

## DEHUMIDIFIERS



### ADHR22LB GE DEHUMIDIFIER

- 22 pints per day
- Pocket handles
- LED digital controls
- Front condensate bucket with water level indicator
- Automatic shut-off when bucket fills
- 3 fan speeds
- Automatic defrost control
- External continuous drain capability
- Easy-roll hidden wheels
- Washable air filter
- 2- or 4-hour "off" timer



### ADHR35LB GE DEHUMIDIFIER

- 35 pints per day
- Pocket handles
- LED digital controls
- Front condensate bucket with water level indicator
- Automatic shut-off when bucket fills
- 3 fan speeds
- Automatic defrost control
- External continuous drain capability
- Easy-roll hidden wheels
- Washable air filter
- 2- or 4-hour "off" timer



### ADHR50LB GE DEHUMIDIFIER

- 50 pints per day
- Pocket handles
- LED digital controls
- Front condensate bucket with water level indicator
- Automatic shut-off when bucket fills
- 3 fan speeds
- Automatic defrost control
- External continuous drain capability
- Easy-roll hidden wheels
- Washable air filter
- 2- or 4-hour "off" timer



### AWHR50LB GE DEHUMIDIFIER

- 50 pints per day
- Connected peace of mind
- Pocket handles
- LED digital controls
- Front condensate bucket with water level indicator
- Automatic shut-off when bucket fills
- 3 fan speeds
- Automatic defrost control
- External continuous drain capability
- Easy-roll hidden wheels
- Washable air filter
- 2- or 4-hour "off" timer



### APHR50LB GE DEHUMIDIFIER

- 50 pints per day
- Built-in water pump with 16-ft. hose included
- Pocket handles
- LED digital controls
- Front condensate bucket with water level indicator
- Automatic shut-off when bucket fills
- 3 fan speeds
- Automatic defrost control
- External continuous drain capability
- Easy-roll hidden wheels
- Washable air filter
- 2- or 4-hour "off" timer

While limited quantities last. Complete features and specifications on page 399. For definitions of logos, see page 13.



SAVES  
**60%**  
ON INSTALLATION  
TIME\*

# ZONELINE® ULTIMATEV10™ VERTICAL AIR CONDITIONERS

## 10 EXCLUSIVE FEATURES FOR EASIER INSTALLATION AND OWNER EXPERIENCE



### INSTA-PLATFORM™\*\*


One-piece design fully integrates with the wall plenum and aligns for a tight seal. Eliminates need for a customized platform construction on site.



**THE PREFERRED VTAC FOR QUIET PERFORMANCE**  
When it comes to QUIET, **91%** prefer the Zoneline® UltimateV10™ Vertical Air Conditioner for superior sound quality and quieter operation.\*\*\*

### ULTRA-QUIET

Delivers quiet cooling power with a smooth sound for a good night's sleep.



### FAST-CONNECT PLUMBING\*\*

Thoughtful design enables platform build and rough plumbing completed in only minutes.




### SELF-ALIGNING, LOCK-IN-PLACE SYSTEM\*\*

The locking ledge secures the chassis to the platform. Perfect fit, perfect seal, no fastening required.



### QUICK-INSTALL PLENUM

Plenum is easily installed from the interior of building, without the need for exterior building access.†



### SELF-CONTAINED DRAINAGE SYSTEM\*\*

Easy installation allows for simple chassis removal while leaving plumbing completely intact.



### ONBOARD DIAGNOSTICS

Electronic controls give clear and fast diagnostics data and fault codes, for quick and easy notifications.



### REVERSE CYCLE DEFROST

Exclusive technology increases efficiency, enabling the unit to run in heat pump mode longer.



### PREMIUM GUARD SEACOAST PROTECTION

Exclusive rustproof basepan and platform provide another level of corrosion protection to ensure lasting performance in challenging environments.



### SmartHQ™ WIFI CAPABILITY

An optional connect module†† gives property managers the ability to monitor multiple units remotely, enhancing guests' experience. Learn more at [smarthqsolutions.com/management](https://smarthqsolutions.com/management).

\*Compared to Friedrich Vert-I-Pak models or GEA AZ91 series models, including installing and building a platform

\*\*RAVDPLAT, platform with drain must be ordered separately.

\*\*\*Based on blind sound jury comparing AZ95H12EAC vs AZ91H12EAC in cooling mode, 91% of participants rated GE AZ95 units as better sound

quality vs. Friedrich-manufactured model. N=11, tested in a Hilton Garden Inn in Louisville, KY with adjacent room installations tested August 2020. Statistical significance at 95% confidence interval.

†Caulking requires exterior access.

††Optional connect module part number PBX23W00Y0 or PBX23W00Y1.



ZONELINE® ULTIMATEV10™ VERTICAL AIR CONDITIONER



ZONELINE ULTIMATEV10 VERTICAL AIR CONDITIONER

- Excellent efficiency and dehumidification
- Permanently lubricated fan motors
- Standard size air filter (18" x 20" x 1") included
- Central desk control capability
- HI and LOW fan speeds controlled by remote thermostat
- Corrosion protection treatment standard
- Slinger ring condensate removal
- Indoor frost control
- Automatic compressor random restart
- Compressor restart delay
- Electronic control diagnostics/Service Models
- Warranty (including both parts and labor)
- Boost Heat
- Freeze/Heat Sentinel
- Auxiliary Control Settings

AZ95E09DAC  
AZ95E12DAC  
AZ95E18DAC

9,200/11,500/17,400 BTU (Cool)  
11.5/12.1/11.2 EER  
230-208 Volts

AZ95H09DAC  
AZ95H12DAC  
AZ95H18DAC

8,900/11,300/17,000 BTU (Cool)  
8,500/10,500/15,800 BTU Heat pump (Heat)  
11.1/11.8/11.1 EER  
3.3/3.5/3.3 COP\*  
230-208 Volts

AZ95H09EAC  
AZ95H12EAC  
AZ95H18EAC

8,800/11,300/17,200 BTU (Cool)  
8,200/10,700/16,100 BTU Heat pump (Heat)  
11.7/11.1/11.0 EER  
3.5/3.3/3.3 COP\*  
265 Volts

SYSTEM ESSENTIAL COMPONENTS

- Insta-Platform™ (RAVDPLAT)
- Wall plenum
- Exterior grille
- Chassis
- Remote thermostat
- Return air grille
- Power connection kit
- Access panel or door
- Drain connections (field supplied)
- Ductwork (field supplied)
- Supply register (field supplied)
- Insta-Platform legs (field supplied)

ESSENTIAL ACCESSORIES

Zoneline Vertical Air Conditioners require a set of essential accessories for proper operation. Once you have selected the size of unit needed, next you'll need to consider the following:

POWER CONNECTIONS - All AZ95 Zoneline Vertical units must be direct connected.



RAK315D/320D/330D  
(RAK320D shown)

230-208 VOLT UNIVERSAL DIRECT  
CONNECT POWER SUPPLY KIT

The correct kit for the installation is determined by the voltage and breaker size of the electrical circuit. There is no 15 amp breaker option available for the 18,000 BTUH models due to compliance with UL standard 60335-2-40.



RAK515D/520D/530D  
(RAK520D shown)

265-VOLT UNIVERSAL DIRECT  
CONNECT POWER SUPPLY KIT

ESSENTIAL PARTS & ACCESSORIES

PLENUM ADAPTERS



RAVTRANS2  
PLENUM  
ADAPTER

to transition from existing AZ75/AZ85 wall plenum to AZ95 unit

RAVTRANS3  
PLENUM  
ADAPTER

to transition from existing AZ90/AZ91 shallow plenum (RAVWPT8) to AZ95 unit

RAVTRANS4  
PLENUM  
ADAPTER

to transition from existing AZ90/AZ91 deep plenum (RAVWPT14) to AZ95 unit

TELESCOPING WALL PLENUM  
AND INSTA-PLATFORM



RAVWPT15  
TELESCOPING  
PLENUM

for wall depth 8"-15"  
Wall cut out: 24" x 32"

RAVDPLAT  
INSTA-PLATFORM  
AND DRAIN (required)

Unit platform and drain system

EXTERIOR GRILLE AND INTERIOR ACCESS PANELS



RAVAL3  
ARCHITECTURAL  
ALUMINUM  
OUTDOOR GRILLE



RAVRG4  
ACCESS PANEL WITH  
RETURN GRILLE

Cut out:  
28-1/8" W x 55-7/8" H



RAVRG2  
RETURN AIR GRILLE

Cut out:  
20-3/8" W x 20-3/8" H

THERMOSTATS

ALL ZONELINE VERTICAL UNITS ARE COMPATIBLE WITH GE APPLIANCES' WALL-MOUNTED REMOTE THERMOSTATS.



RAK149P2  
HEAT PUMP DIGITAL  
PROGRAMMABLE REMOTE  
THERMOSTAT



RAK149F2  
HEAT PUMP DIGITAL  
TWO-FAN-SPEED THERMOSTAT



RAK180W1  
ENERGY MANAGEMENT  
OCCUPANCY-SENSING WIRED/  
WIRELESS THERMOSTAT





# ZONELINE® PACKAGED TERMINAL AIR CONDITIONERS

## FEATURE HIGHLIGHTS



### QUIETEST PTAC IN THE INDUSTRY\*

Zoneline has the largest fan vs. leading competitor designs, which means less rotation and quieter performance.



### BLOWER & DC MOTORS

Large cross-flow blower, two DC fan motors and smart-fan cooling and heating keep the unit quiet while providing efficient performance.



### PREMIUM GUARD CORROSION PROTECTION

Special coatings, paints and stainless steel ensure lasting performance in challenging environments such as oceanfront properties.



### WEATHER BARRIER SYSTEM SEAL

Keeps noise, dirt and grime outside.  
Creates a quieter room and more efficient operation.



### HEAT & FREEZE SENTINEL

Keeps room from overheating or freezing to increase efficiency and comfort while decreasing operating and maintenance costs.



### SYSTEM COMPATIBILITY

Compatible with a wide variety of 24VAC thermostats and energy management systems, including central desk control.



### MAKEUP AIR

A factory-installed secondary system provides continuous outdoor air. The supplemental dehumidification system operates when relative humidity levels rise above 55%.



### INTERNAL CONDENSATE REMOVAL (ICR)

A system of piping and pump minimizes the amount of condensate draining from the unit when in heat pump mode.



### DRY AIR 25\*\*

Zoneline Dry Air models remove 20%-35% more moisture from the air than standard Zoneline air conditioners\*\*, making them perfect for high-humidity climates.

\*When compared to leading competitors. 12,000 BTU/h heat pump models tested by independent third party at a national acoustical lab, in accordance with ASTM and AHRI standards. All Zonelines have an STC of 29. The higher the STC, the better the unit blocks outside noise.  
\*\*Varies when comparing dehumidification rates of the 7,000/9,000/12,000 BTU base models to their Dry Air model counterparts. AZ45 Series electric resistance models only.



ZONELINE® PACKAGED TERMINAL AIR CONDITIONERS



AZ45 SERIES | COOLING AND ELECTRIC HEAT

<ul style="list-style-type: none"><li>Digital LED display</li><li>Variable fresh air vent control</li><li>Cross-flow blower</li><li>Two DC fan motors</li><li>Smart-fan cooling</li><li>Heat and Freeze Sentinel</li><li>Remote thermostat capability</li><li>Electronic temperature limiting</li><li>Works with central desk control and through-wall fans</li></ul>	BASE	PREMIUM GUARD CORROSION PROTECTION		DRY AIR 25 WITH CORROSION PROTECTION	
	AZ45E07DAB	AZ45E07DAC	AZ45E07EAC	AZ45E07DAP	
	7,200/7,000 BTU 13.4/13.4 EER 230/208 Volts	7,200/7,000 BTU 13.4/13.4 EER 230/208 Volts	7,100 BTU 13.2 EER 265 Volts	6,900/6,800 BTU 12.8/12.8 EER 230/208 Volts	
	AZ45E09DAB	AZ45E09DAC	AZ45E09EAC	AZ45E09DAP	AZ45E09EAP
	9,700/9,600 BTU 12.1/12.1 EER 230/208 Volts	9,400/9,300 BTU 11.8/11.8 EER 230/208 Volts	9,500 BTU 11.6 EER 265 Volts	9,400/9,300 BTU 12.1/12.1 EER 230/208 Volts	9,400 BTU 12.1 EER 265 Volts
	AZ45E12DAB	AZ45E12DAC	AZ45E12EAC	AZ45E12DAP	AZ45E12EAP
	11,600/11,500 BTU 11.7/11.8 EER 230/208 Volts	11,600/11,500 BTU 11.7/11.8 EER 230/208 Volts	11,500 BTU 11.7 EER 265 Volts	11,200/11,100 BTU 11.4/11.5 EER 230/208 Volts	10,900 BTU 11.0 EER 265 Volts
	AZ45E15DAB	AZ45E15DAC	AZ45E15EAC		
	14,200/14,100 BTU 10.5/10.5 EER 230/208 Volts	14,000/13,900 BTU 10.3/10.4 EER 230/208 Volts	14,700 BTU 10.5 EER 265 Volts		

AZ65 SERIES | HEAT PUMP

<p>Includes all resistance heat features, plus:</p> <ul style="list-style-type: none"><li>Staged heating</li><li>Heat pump with backup resistance heat option</li><li>Reverse cycle defrost</li></ul>	BASE	PREMIUM GUARD CORROSION PROTECTION		INTERNAL CONDENSATE REMOVAL	
	AZ65H07DAB	AZ65H07DAC	AZ65H07EAC	AZ65H07DAD	AZ65H07EAD
	7,100/6,900 BTU cool 6,200/6,100 BTU heat 13.0/13.0 EER 4.0/4.0 COP* 230/208 Volts	7,100/7,000 BTU cool 6,200/6,100 BTU heat 13.0/13.0 EER 4.0/4.0 COP* 230/208 Volts	7,000 BTU cool 6,200 BTU heat 12.8 EER 3.9 COP* 265 Volts	7,000/6,900 BTU cool, 6,200/6,000 BTU heat, 13.0/13.0 EER, 4.0/4.0 COP* 230/208 Volts	7,000 BTU cool 6,200 BTU heat 12.8 EER 3.9 COP* 265 Volts
	AZ65H09DAB	AZ65H09DAC	AZ65H09EAC	AZ65H09DAD	AZ65H09EAD
	9,700/9,600 BTU cool 8,100/8,000 BTU heat 12.2/12.2 EER, 3.7/3.7 COP* 230/208 Volts	9,600/9,500 BTU cool 8,100/8,000 BTU heat 12.2/12.2 EER 3.7/3.7 COP* 230/208 Volts	9,500 BTU cool 8,100 BTU heat 11.7 EER 3.6 COP* 265 Volts	9,600/9,500 BTU cool, 8,200/8,000 BTU heat, 12.0/12.0 EER, 3.6/3.6 COP* 230/208 Volts	9,500 BTU cool 8,100 BTU heat 11.7 EER 3.5 COP* 265 Volts
	AZ65H12DAB	AZ65H12DAC	AZ65H12EAC	AZ65H12DAD	AZ65H12EAD
	11,900/11,800 BTU cool, 10,400/10,300 BTU heat 11.6/11.8 EER 3.6/3.6 COP* 230/208 Volts	11,800/11,600 BTU cool, 10,300/10,200 BTU heat 11.6/11.5 EER 11.8/11.8 EER 3.6/3.6 COP* 230/208 Volts	11,500 BTU cool 10,000 BTU heat 11.2 EER 3.5 COP* 265 Volts	11,800/11,600 BTU cool, 10,400/10,200 BTU heat, 11.5/11.5 EER, 3.5/3.5 COP* 230/208 Volts	11,600 BTU cool 10,000 BTU heat 11.4 EER 3.4 COP* 265 Volts
	AZ65H15DAB	AZ65H15DAC	AZ65H15EAC	AZ65H15DAD	AZ65H15EAD
	14,400/14,200 BTU cool, 13,500/13,300 BTU heat 10.5/10.5 EER 3.2/3.2 COP* 230/208 Volt	14,400/14,200 BTU cool, 13,200/13,000 BTU heat 10.4/10.4 EER 3.2/3.2 COP* 230/208 Volts	14,000 BTU cool 13,200 BTU heat 10.0 EER 3.1 COP* 265 Volts	14,100/14,100 BTU cool, 13,200/13,000 BTU heat, 10.3/10.3 EER, 3.2/3.2 COP* 230/208 Volts	14,200 BTU cool 13,300 BTU heat 10.3 EER 3.2 COP* 265 Volts

AZ45 SERIES | COOLING AND ELECTRIC HEAT WITH MAKEUP AIR

Includes all AZ45 features, plus:

- Delivers 25-50 CFM of continuous makeup air
- Dehumidifies incoming air when outdoor relative humidity is above 55% and outdoor temperatures are above 50° F
- Motorized vent door
- May reduce the need for rooftop units

MAKEUP AIR		<p><b>NOTE:</b> Because makeup air increases room BTU load requirements and requires additional PTAC cooling or heating, the building's electrical needs may be impacted.</p> <p><b>NOTE:</b> Makeup air models are not recommended for installation within two miles of coastal areas.</p> <p><b>NOTE:</b> It is strongly recommended to install makeup air with wall thermostats.</p>
AZ45E09DBM	AZ45E12DBM	
9,100/9,100 BTU	11,700/11,500 BTU	
11.5/11.5 EER	11.6/11.6 EER	
230/208 Volts	230/208 Volts	

AZ65 SERIES | HEAT PUMP WITH MAKEUP AIR

Includes all resistance heat makeup air features, plus:

- Staged heating
- Heat pump with backup resistance heat option
- Reverse cycle defrost

MAKEUP AIR			
AZ65H07DBM	AZ65H09DBM	AZ65H12DBM	AZ65H15DBM
7,000/7,000 BTU cool 6,200/6,100 BTU heat 12.5/12.5 EER 4.0/4.0 COP* 230/208 Volts	9,200/9,100 BTU cool 8,000/7,900 BTU heat 11.3/11.3 EER 3.3/3.3 COP* 230/208 Volts	11,500/11,400 BTU cool 10,200/10,000 BTU heat 11.2/11.2 EER 3.5/3.5 COP*, 230/208 Volts	14,000/13,800 BTU cool 13,200/13,000 BTU heat 10.1/10.1 EER, 3.2/3.2 COP* 230/208 Volts
AZ65H07EBM	AZ65H09EBM	AZ65H12EBM	
6,900 BTU cool 6,000 BTU heat 12.5 EER 3.9 COP* 265 Volts	9,200 BTU cool 8,100 BTU heat 11.5 EER 3.6 COP* 265 Volts	11,600 BTU cool 10,000 BTU heat 11.3 EER 3.4 COP* 265 Volts	

\*Coefficient of Performance

ADDITIONAL ACCESSORIES—MAY BE REQUIRED FOR AZ45/AZ65 SERIES ZONELINE UNITS

MODEL #	DESCRIPTION	MODEL #	DESCRIPTION
RAA13	MERV 13 replacement air filter for RAK13 kit	RAK44	Curtain Guard (5pk)
RAB71B	Wall sleeve	RAK4002D	Zoneline direct-connect and sub-base junction box (230V)*
RAB81	Quick Snap wall sleeve—unassembled	RAK515D	265V power connection kit (15 amp) for direct-connected units
RAB81B	Quick Snap wall sleeve—assembled		265V power connection kit (20 amp) for direct-connected units
RAB8116B	Quick Snap Extended wall sleeve, 16"	RAK520D	265V power connection kit (30 amp) for direct-connected units
RAB8118B	Quick Snap Extended wall sleeve, 18"		230/208V sub-base with (15 amp) power cord included
RAB8120B	Quick Snap Extended wall sleeve, 20"	RAK204D15C	230/208V sub-base with (20 amp) power cord included
RAB8124B	Quick Snap Extended wall sleeve, 24"	RAK204D20C	230/208V sub-base with (30 amp) power cord included
RAB78B	SMC Quick Snap wall sleeve	RAK204D30C	230/208V non-electrical sub-base
RAD10	Internal/external drain kit	RAK204E15C	265V sub-base with (15 amp) power cord included
RAG60	Stamped aluminum grille	RAK204E20C	265V sub-base with (20 amp) power cord included
RAG61/62/63	Architectural exterior grille(s), high-impact plastic. Beige, Maple and Dark Brown	RAK204E30C	265V sub-base with (30 amp) power cord included
	Extruded aluminum architectural grille	RAK204SW	Disconnect Switch for use in sub-base DPST switch that fits directly into sub-base for use in 230/208 and 265 volt applications.
RAK13	MERV 13 makeup air filter kit for AZ45/65 DBM/EBM models		230/208V power cord connection kit (15 amp) for sub-base connected units
RAK149P2	Programmable dual-use single-fan-speed thermostat. Can be set up for single- or two-stage heating.	RAK315SP	230/208V power cord connection kit (20 amp) for sub-base connected units
	Two-fan-speed dual-use digital thermostat. Can be set up for single- or two-stage heat.		230/208V power cord connection kit (30 amp) for sub-base connected units
RAK180W1	Wired/wireless wall thermostat with motion sensor, MUAM capable	RAK320SP	265V power cord connection kit (15 amp) for sub-base connected units
RAK315D	230/208V power connection kit (15 amp) for direct-connected units	RAK330SP	265V power cord connection kit (20 amp) for sub-base connected units
	230/208V power connection kit (20 amp) for direct-connected units	RAK515P	265V power cord connection kit (30 amp) for sub-base connected units
RAK320D	230/208V power connection kit (30 amp) for direct-connected units		265V power cord connection kit (20 amp) for sub-base connected units
RAK330D	230/208V LCDI power cord connection kit (15 amp)	RAK520P	265V power cord connection kit (30 amp) for sub-base connected units
RAK315P	230/208V LCDI power cord connection kit (20 amp)	RAK530P	265V power cord connection kit (20 amp) for sub-base connected units
RAK320P	230/208V LCDI power cord connection kit (30 amp)		265V power cord connection kit (30 amp) for sub-base connected units
RAK330P	230/208V LCDI power cord connection kit (30 amp)		





# 26" BUILT-IN WALL AIR CONDITIONERS

## FEATURE HIGHLIGHTS



### TRUE BUILT-IN DESIGN

The ultimate fit and finish for more usable space and the best in built-in installation. Sleeve and chassis are perfectly matched, creating a seamless fit without leaks or gaps.



### PREMIUM GUARD SEACOAST PROTECTION\*

Premium Seacoast Protection on heat/cool models uses stainless steel screws, special coatings and double coats of paint on key components including coils, base pan, compressor.



### ELECTRONIC CAP TOUCH CONTROLS

Controls offer a high-end and smooth-to-the-touch panel.

## 26" BUILT-IN WALL AIR CONDITIONERS



### GE 26" STANDARD-MOUNT, COOL-ONLY UNITS\*\*

#### AJCQ10DWH

10,150/9,900 BTU, 10.6/10.6 CEER, 230/208 Volts

#### AJCQ12DWH

12,100/11,900 BTU, 10.5/10.5 CEER, 230/208 Volts

#### AJCQ14DWH†

14,000/13,600 BTU, 9.3/9.5 CEER, 230/208 Volts

†Not Energy Star® certified



#### AJCQ06LWH

6,300 BTU, 11.0 CEER, 115 Volts

#### AJCQ08AWH

8,400 BTU, 10.6 CEER, 115 Volts

#### AJCQ10AWH

10,000 BTU, 10.6 CEER, 115 Volts

#### AJCQ12AWH

12,000 BTU, 10.5 CEER, 115 Volts



### GE 26" HIGH-MOUNT, COOL-ONLY UNITS\*\*

#### AJCM10DWH

10,150/9,900 BTU, 10.6/10.6 CEER, 230/208 Volts

#### AJCM12DWH

12,100/11,900 BTU, 10.5/10.5 CEER, 230/208 Volts

#### AJCM08AWH

8,400 BTU, 10.6 CEER, 115 Volts

#### AJCM10AWH

10,000 BTU, 10.6 CEER, 115 Volts



### GE 26" STANDARD-MOUNT HEAT/COOL UNITS\*\*

#### AJEQ08AWH\*\*\*

8,300 BTU cool, 4,200 BTU heat, 9.6 CEER, 115 Volts

#### AJEQ10DWH

10,000/9,800 BTU cool, 10,600/8,600 BTU heat, 9.6/9.6 CEER, 230/208 Volts

#### AJEQ12DWH

12,000/11,700 BTU cool, 10,600/8,600 BTU heat, 9.5/9.5 CEER, 230/208 Volts

#### AJEQ14DWH

14,000/13,600 BTU cool, 10,600/8,600 BTU heat 9.3/9.5 CEER, 230/208 Volts

### HEAT PUMPS

#### AJHQ08AWH

8,200 BTU cool, 9.8 CEER, 6,650 BTU rev cycle heat 4,200 BTU electric heat, 115 Volts

#### AJHQ12DWH

11,500/11,100 BTU cool, 8,500/8,300 BTU rev cycle heat 10,600/8,600 BTU electric heat 9.6/9.6 CEER, 230/208 Volts



### GE 26" HIGH-MOUNT HEAT/COOL UNIT\*\*

#### AJEM12DWH

12,000/11,700 BTU cool, 10,600/8,600 BTU heat, 9.5/9.5 CEER, 230/208 Volts

### ACCESSORIES

#### RAB26A

Quick Snap wall sleeve (RAG13A grille included)

#### RAG13A

Stamped aluminum grille

#### RAG14E

Architectural grille

#### RAD10

Internal/External Drain Kit

#### RAA85

Replacement filter

#### RAK26TO

Tenant Option panels to seal sleeve if chassis not installed

### Specifications subject to change.

Complete features and specifications on pages 400-401. See page 297 for Accessibility Requirements. For definitions of logos, see page 13.

\*\*Wall case sold separately and includes RAG13A aluminum grille.

\*\*\*This unit is not intended to be the primary source of heat.





# 24" UNIVERSAL FIT WALL AIR CONDITIONERS

## FEATURE HIGHLIGHTS



### UNIVERSAL FIT

Simple slide-in installation is made for a precise fit into a variety of different wall sleeves. Trim kit and installation kit included.



### LARGE LCD DISPLAY

Intuitive and easy-to-read LC display controls room air comfort at a single touch.



### ECO MODE

Innovative mode where the fan cycles off between cooling intervals, saving energy while keeping the room comfortable.

**P** GE Profile™ **G** GE Appliances

Not all features available on all models.

## 24" UNIVERSAL FIT, STANDARD-MOUNT



**ACCESSORY**  
**RAB24**  
Wall sleeve,  
exterior grille included.



### COOL-ONLY UNITS

#### AKCQ10DCH

10,200/9,900 BTU, 10.6/  
10.6 CEER, 230/208 Volts

#### AKCQ12DCH

12,100/11,750 BTU, 10.5/  
10.5 CEER, 230/208 Volts

#### AKCQ14DCH†

14,000/14,000 BTU, 9.3/  
9.3 CEER, 230/208 Volts

#### AKCQ08ACH

8,550 BTU, 10.6 CEER,  
115 Volts

#### AKCQ10ACH

10,000 BTU, 10.6 CEER,  
115 Volts

#### AKCQ12ACH

12,000 BTU, 10.5 CEER,  
115 Volts

### HEAT/COOL UNITS†

#### AKEQ10DCH

10,000/9,800 BTU, 9.6/  
9.6 CEER, 10,600/8,600  
Resistance Heat BTU,  
230/208 Volts

#### AKEQ12DCH

12,000/11,600 BTU, 9.5/  
9.5 CEER, 10,600/8,600  
Resistance Heat BTU,  
230/208 Volts

#### AKEQ14DCH

14,000/13,600 BTU, 9.3/  
9.5 CEER, 10,600/8,600  
Resistance Heat BTU,  
230/208 Volts

†Not Energy Star® certified.

Specifications are subject to change.  
Complete features and specifications on page 400.



CLEANING SUPPLIES



**WX10X10021**  
**CERAMA BRYTE® GAS GRATE CLEANING KIT**

- Formulated to deliver the extra cleaning needed to power through burnt-on deposits on gas grates and burner caps
- Kit includes:
  - 1 brass bristle cleaning brush
  - 4 cooktop cleaning pads
  - 16-oz. bottle of gas grate cleaner
- Not recommended for aluminum drip pans

Cerama Bryte is a registered trademark of Cerama Bryte, Inc.



**WX10X10020**  
**CERAMA BRYTE COMPLETE COOKTOP KIT**

- Keeps your cooktop looking like new
- Cleans and provides a protective coating for glass-ceramic cooktops
- Kit includes:
  - 18-oz. bottle of cooktop cleaner
  - 16-oz. bottle of touchup spray
  - 2-oz. bottle of burnt-on grease remover
  - 5 cooktop cleaning pads
  - 1 microfiber cleaning cloth
  - 1 scraper



**WX10X350**  
**CERAMA BRYTE CLEANING PADS**

- Non-woven fibers will not scratch surfaces
- Includes 4 pads (4" x 2-1/2")



**WX10X307**  
**CERAMA BRYTE MICROFIBER CLEANING CLOTHS**

- Can be used with Cerama Bryte cooktop cleaner or stainless steel cleaner
- Also usable as a dusting cloth
- Package of 2 durable cloths



**PM10X304**  
**CERAMA BRYTE COOKTOP SCRAPER**

- Single-edge angled razor blade in a unique two-piece plastic handle
- Removes large, burnt-on areas
- Use before cleaning with pad and Cerama Bryte Cooktop Cleaner



**WX10X320**  
**CERAMA BRYTE BURNT-ON GREASE REMOVER**

- Eliminates grease and burnt-on food from glass-ceramic cooktops
- 2-oz. bottle



**WX10X300**  
**CERAMA BRYTE COOKTOP CLEANER**

- Ideal for heavy, burnt-on residue
- Cleans and provides a protective coating for glass-ceramic cooktops
- Excellent for kitchen sinks and countertops
- Contains no phosphates
- 28-oz. bottle



**WX10X392**  
**CERAMA BRYTE APPLIANCE CLEANER**

- Quickly cleans dried starches (like potatoes and noodles) and greases (like bacon)
- Extra-strength—4 times the strength of regular all-purpose cleaners
- Safe to use around food preparation surfaces
- **Great on painted appliance finishes such as Black Stainless, Slate and Black Slate**
- 16-oz. bottle



**WX10X310**  
**CERAMA BRYTE GRANITE AND QUARTZ CLEANER**

- Cleans, polishes and helps protect sealed stone and solid-surface countertops
- Quick and easy removal of grease, watermarks and stains
- 16-oz. spray bottle



**WX10X391**  
**CERAMA BRYTE TOUCHUPS SPRAY**

- Safe on ALL smoothtop cooktops—ideal for induction!
- Quickly and easily removes fingerprints, grease, water residue and smudges
- Easy-to-use trigger spray
- 16-oz. bottle
- For tough, dried-on residue, use Cerama Bryte Cooktop Cleaner, WX10X300



**WX10X10206**  
**CERAMA BRYTE REFRIGERATOR CLEANER**

- Cleans grease and food spills on the interior of the refrigerator or microwave
- Great to use as a multi-surface kitchen cleaner
- Non-toxic and safe for everyday use
- 16-oz. bottle



**WX10X10210**  
**FINISH® JET-DRY® RINSE AID**

- 16-oz. bottle handles 150 washes; use with detergent
- Works with detergent to rinse away stubborn leftover food, spots, and film for sparkling dishes, glasses and utensils
- Contains glass protection ingredient for shinier and drier dishes
- Is automatically released in the rinse cycle after being added to the rinse aid dispenser

Finish is a registered trademark of Reckitt Benckiser Group.



**WX10X10209**  
**FINISH DISHWASHER CLEANER**

- 8.45-oz. bottle; recommended use: once a month
- Cleans, freshens, and helps maintain your dishwasher
- Hygienically cleans hidden grease and lime scale from filters, spray-arms, pipes and tubes
- Safe for septic systems and contains no phosphorus



**PM10X311**  
**CERAMA BRYTE STAINLESS STEEL CLEANER & POLISHER**

- Specially formulated to clean, polish and protect stainless steel appliances
- 16-oz. bottle
- **Not recommended for use on Black Stainless, Slate, or Black Slate finishes**



**WX10X10004**  
**CERAMA BRYTE STAINLESS STEEL WIPES**

- Cleans, polishes and protects all stainless steel without streaking
- Removes grease spatter, fingerprints, dust and food
- 35 pre-moistened wipes in canister
- **Not recommended for use on Black Stainless, Slate, or Black Slate finishes**



**WX10X10009**  
**CITRUSHINE™ STAINLESS STEEL SPRAY**

- Cleans and protects all stainless steel without streaking
- Removes grease spatter, fingerprints, dust and food
- 12-oz. bottle
- **Not recommended for use on Black Stainless, Slate, or Black Slate finishes**

Citrushine is a trademark of Bryson Industries, Inc.



**WX10X10022**  
**FINISH HARD WATER DETERGENT BOOSTER**

- 14-oz. canister of booster crystals; lemon sparkle scent
- Can be added to pre-wash chamber or directly to bottom of dishwasher
- Supercharges detergent for crystal-clear dishes
- Booster removes
  - Spots, residue and hard-water film
  - Tough, bleachable stains such as tea
  - Mineral buildup in your machine
- Safe for septic systems and contains no phosphorus



**WX10X311**  
**CERAMA BRYTE DISPOSAL CLEANER**

- Removes foul odors and keeps your disposer and drains smelling fresh with a just-cleaned scent
- Cleans away food, grease and odors from your disposer and the entire drain
- Most effective at removing the cause of odors by providing superior, long-lasting cleaning
- 16-oz. bottle



**WX10X312**  
**CERAMA BRYTE WASHER CLEANER**

- Removes abrasives harmful to laundry
- Keeps machines working their best
- Safe for all models
- 16-oz. bottle, contains 4 uses

ORDER GE PARTS AND ACCESSORIES BY CALLING 800-851-6200 OR ONLINE AT [GEAPPLIANCEPARTS.COM](http://GEAPPLIANCEPARTS.COM) BY USING GE PARTS ACCOUNT NUMBER.

LIMITED WARRANTY INFORMATION

(See written warranty for complete details.)

The condensed list below is a convenient overview of the written warranties offered on various GE appliances described in this catalog for products manufactured on or after January 1, 2006. For complete warranty details on a specific GE Appliances model, contact your nearest GE Appliances supplier, or call GE Appliances Factory Service, toll-free, 800.GE.CARES (800-432-2737).

REFRIGERATORS, WINE AND BEVERAGE CENTERS, ICE MAKERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any part</b> in the refrigerator which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Five years From the date of the original purchase (GE Profile™ models ONLY)	<b>Any part of the sealed refrigerating system</b> (the compressor, condenser, evaporator and all connecting tubing) which fails due to a defect in materials or workmanship. During this <b>limited five-year sealed refrigerating system warranty</b> , GE Appliances will also provide, <b>free of charge</b> , all labor and related service costs to replace the defective part on GE Profile appliances only.

REFRIGERATORS, FREEZERS, WINE AND BEVERAGE CENTERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any part</b> in the refrigerator which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

ICEMAKERS

For Refrigerators

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any part</b> in the icemaker which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

WATER FILTERS

For the period of	GE Appliances will replace
30 days From the date of the original purchase	<b>Any part</b> of the water filter cartridge which fails due to a defect in materials or workmanship during this <b>limited thirty-day warranty*</b> .

RANGES, COOKTOPS, WALL OVENS, WARMING DRAWERS AND HOODS

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any part</b> in the cooking product which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

SPEEDCOOK FIVE-IN-ONE OVENS WITH ADVANTIUM® TECHNOLOGY

For the period of	GE Appliances will choose to replace or service
One year From the date of the original purchase	<b>Any part</b> of the oven which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related services costs to replace the defective part.
Five years From the date of the original purchase	<b>The magnetron tube</b> , if the magnetron tube fails due to a defect in the materials or workmanship. During this <b>five-year limited warranty</b> , you will be responsible for any labor or in-home service costs.

OVER-THE RANGE AND COUNTERTOP MICROWAVES

For the period of	GE Appliances will choose to replace or service
One year From the date of the original purchase	<b>In the event of service</b> , GE Appliances will provide <b>any part</b> of the microwave which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will also provide, <b>free of charge</b> , all labor and related service costs to replace the defective part when the unit is serviced.

DISHWASHERS AND COMPACTORS

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any part</b> in the dishwasher or compactor which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

DISPOSERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	Models GFC320 and GFC325: The entire disposer if there is a defect in materials or workmanship relating to functional parts only (appearance parts are excluded). During this <b>limited one-year warranty</b> , GE Appliances will also provide, <b>free of charge</b> , all labor charges related to replacing the original disposer along with the replacement disposer within the first year.
Additional one year From the date of the original purchase	Models GFC520V, GFC525V: If there is a defect in materials or workmanship relating to functional parts only (appearance parts are excluded). During this <b>one-year extended limited warranty period</b> , you will be responsible for all installation charges related to the replacement disposer.
Additional two years From the date of the original purchase	Models GFC530V, GFC535V: If there is a defect in materials or workmanship relating to functional parts only (appearance parts are excluded). During this <b>two-year extended limited warranty period</b> , you will be responsible for all installation charges related to the replacement disposer.
Additional four years From the date of the original purchase	Models GFC720V, GFB760V: If there is a defect in materials or workmanship relating to functional parts only (appearance parts are excluded). During this <b>four-year extended limited warranty period</b> , you will be responsible for all installation charges related to the replacement disposer.
Additional six years From the date of the original purchase	Model GFC1020V: If there is a defect in materials or workmanship relating to functional parts only (appearance parts are excluded). During this <b>six-year extended limited warranty period</b> , you will be responsible for all installation charges related to the replacement disposer.
Three years From the date of the original purchase	Model GREEN05P: The entire disposer if there is a defect in materials or workmanship relating to functional parts only (appearance parts are excluded). During this <b>limited three-year warranty</b> , GE Appliances will also provide, <b>free of charge</b> , all labor charges related to replacing the original disposer along with the replacement disposer within the first year.

\*If your GE Appliances part fails because of a manufacturing defect within thirty days from the date of original purchase for use, we will give you a new or, at our option, a rebuilt part without charge. Return the defective part to the parts supplier from whom it was purchased together with a copy of the “proof of purchase” for the part. If the part is defective and shows no signs of abuse, it will be exchanged. The warranty does not cover the failure of parts which are damaged while in your possession, are abused, or have been installed improperly. It does not cover the cost of returning the part to the supplier from whom it was purchased nor does it cover the cost of labor to remove or install it to diagnose the fault. It does not cover parts used in products in commercial use except in the case of air conditioning equipment. In no event shall GE Appliances be liable for consequential damages. Warrantor: GE Appliances

ELECTRIC TANK STYLE WATER HEATERS\*\*

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any</b> factory specified part of the water heater which fails due to a defect in materials or workmanship. During this <b>limited one year warranty</b> , GE Appliances will also provide, free of charge, all labor and related service to replace the defective part, or will reimburse consumers for documented out-of-pocket costs for parts and/or labor for professional service at a predetermined rate as found on the GE Appliances website GEAppliances.com/waterheater, unless service provided to replace defective parts is determined to be a result of improper installation or maintenance.
Second through eighth, tenth or twelfth year From the date of the original purchase	<b>Any part</b> of the water heater which fails due to a defect in materials or workmanship. During this <b>limited second through the end of the warranty period</b> , labor and relat service to replace the defective part are not included.  *Warranty is based on the 6th and 7th digit of model number located on rating plate (e.g.: <b>GE50T08BAM</b> has a part warranty of 8 years).

ATMOSPHERIC GAS TANK STYLE WATER HEATER\*\*

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any part</b> in the water heater which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will reimburse registered service providers, or will reimburse consumers for documented out of pocket costs for parts and/or labor for professional service at a predetermined rate as found on the GE Appliances Website GEAppliances.com/waterheater, unless service provided to replace defective parts is determined to be a result of improper installation or maintenance.
Second through eighth, tenth or twelfth year From the date of the original purchase	<b>Any part</b> of the water heater which fails due to a defect in materials or workmanship. During this limited second through the end of the warranty period, labor and related service to replace the defective part are not included.  *Warranty is based on the 6th and 7th digit of model number located on rating plate (e.g.: <b>GE50T08BAM</b> has a part warranty of 8 years).

GE TANKLESS ELECTRIC WATER HEATERS

For the period of	GE Appliances will replace
Five years From the date of the original purchase	The entire water heater if there is a defect in materials or workmanship relating to functional parts only. <b>During this warranty period</b> , labor and related service to install the new water heater or remove the defective water heater <b>are not covered under this warranty</b> . The replacement unit is warranted for the remainder of your water heater’s original <b>five year warranty period</b> . The replacement unit may either be a new unit or a refurbished unit.

2.5G & 6G ELECTRIC POINT OF USE WATER HEATERS\*\*

For the period of	GE Appliances will replace
Eight years From the date of the original purchase	The entire water heater if there is a defect in materials or workmanship relating to functional parts only. <b>During this warranty period</b> , labor and related service to install the new water heater or remove the defective water heater <b>are not covered under this warranty</b> . The replacement unit is warranted for the remainder of your water heater’s original <b>eight-year warranty period</b> . The replacement unit may either be a new unit or a refurbished unit.

\*\*All warranty service is provided by our Factory Service Centers, or an authorized Customer Care® technician. To schedule service for your GE water heater call GE Water Heaters at 1-800-943-8186. Please have your serial number and your model number available when calling for service. Servicing your appliance may require the use of the onboard data port for diagnostics. This gives a GE Appliances factory service technician the ability to quickly diagnose any issues with your appliance and helps GE Appliances improve its products by being provided with information on your appliance. If you do not want your appliance data to be sent to us, please advise your technician not to submit the data to GE Appliances at the time of service.

SOLAR WATER HEATER

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any part</b> in the water heater which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will reimburse registered service providers, or will reimburse consumers for documented out-of-pocket costs for parts and/or labor for professional service at a predetermined rate as found on the GE Appliances website GEAppliances.com/waterheater, unless service provided to replace defective parts is determined to be a result of improper installation or maintenance.
Second through Fifth Year From the date of the original purchase	<b>Any part</b> in the water heater which fails due to a defect in materials or workmanship. During this <b>limited second through fifth year warranty period</b> , labor and related service to replace the defective part are not included.
Sixth through tenth year From the date of the original purchase	50% of the cost of <b>any part</b> of the water heater which fails due to defect in materials or workmanship. During this <b>sixth through the end of the warranty period</b> , labor and related service to replace the defective part are not included.  Warranty is based on the 6th and 7th digit of model number located on rating plate (e.g.: <b>GE50T10BAM</b> has a part warranty of 10 years).

WATER SOFTENERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any part</b> of the Water Softening System which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Second through third year From the date of the original purchase	<b>Electronic Monitor</b> , if the Electronic Monitor fails due to a defect in materials or workmanship. During this <b>additional two-year limited warranty</b> , you will be responsible for any labor and related service costs.
Second through tenth year From the date of the original purchase	<b>Cabinet (Brine Tank) and Resin Tank</b> , if either of these parts fails due to a defect in materials or workmanship. During this <b>additional nine-year limited warranty</b> , you will be responsible for any labor and related service costs.

WASHERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any part</b> in the washer which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Ten years From the date of the original purchase	Models GFW850, GTW840/845, GTW720/725, GTW680/685, GFW650, GFW550 and GFW510: <b>The motor</b> , if it should fail due to a defect in materials or workmanship. During this <b>additional nine-year limited warranty</b> , you will be responsible for any labor and related service costs.

DRYERS

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any part</b> in the dryer which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

REVERSE OSMOSIS FILTRATION SYSTEMS

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any part</b> of the Reverse Osmosis Filtration System (excluding filters) which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

DUAL-STAGE AND SINGLE-STAGE WATER FILTRATION AND WHOLE HOUSE FILTRATION

For the period of	GE Appliances will replace
One year From the date of the original purchase	<b>Any part</b> of the Water Filtration System (excluding filters) which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.



LIMITED WARRANTY INFORMATION (continued)  
(See written warranty for complete details.)

DUAL-STAGE AND SINGLE-STAGE WATER FILTRATION AND WHOLE HOUSE FILTRATION All GE models starting with GX	
For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part of the Water Filtration System (excluding filters) which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , you will be responsible for any labor and related service costs.

DUAL-STAGE AND SINGLE-STAGE WATER FILTRATION AND WHOLE HOUSE FILTRATION GE models: UNFCTFBL, UCRING, UCWRENCH, HHRING & HHWRNCH	
For the period of	GE Appliances will replace
30 days From the date of the original purchase	Any part of the water filtration accessory that fails due to a defect in materials or workmanship. During this <b>limited 30-day warranty</b> , you will be responsible for any labor and related service costs.

AIR CONDITIONERS Window	
For the period of	GE Appliances will replace
One year From the date of the original purchase	Replacement, repair, or refund of the original retail price for any product which fails due to a defect in materials or workmanship. If the unit is exchanged, the replacement unit is warranted for the remainder of your product's original <b>one-year warranty</b> period. GE Appliances will, at its sole discretion, replace the product with a product of the same or comparable functionality and quality or refund the original retail price.

PORTABLE AIR CONDITIONER UNITS	
For the period of	GE Appliances will replace
One year From the date of the original purchase	Replacement, repair or refund of the <b>original retail price</b> for any product which fails due to a <b>defect in materials or workmanship</b> . If the unit is exchanged, the replacement unit is <b>warranted for the remainder of your product's original one-year warranty</b> period. GE will, at its sole discretion, replace the product with a product of the same or comparable functionality and quality or refund the <b>original retail price</b> .

DEHUMIDIFIERS	
For the period of	GE Appliances will replace
One year From the date of the original purchase	Replacement, repair, or refund of the original retail price for any product which fails due to a defect in materials or workmanship. If the unit is exchanged, the replacement unit is warranted for the remainder of your product's original <b>one-year warranty period</b> . GE Appliances will, at its sole discretion, replace the product with a product of the same or comparable functionality and quality or refund the original retail price.

<b>EXCLUSION OF IMPLIED WARRANTIES</b> - Your sole and exclusive remedy is product repair as provided in this Limited Warranty. Any implied warranties, including the implied warranties of merchantability or fitness for a particular purpose, are limited to one year or the shortest period allowed by law.
---

This warranty is extended to the original purchaser and any succeeding owner for products purchased for home use within the USA. In Alaska, the One-Year Warranty excludes the cost of shipping, or service calls to your home. Some states do not allow the exclusion or limitation of incidental or consequential damages. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. To know what your legal rights are, consult your local or state consumer affairs office or your state's Attorney General.

FOR EACH PRODUCT LISTED
<b>What GE Appliances will not cover:</b>
<div><div><div>■</div><div>Service trips to your home to teach you how to use the product.</div></div><div><div>■</div><div>Improper installation.</div></div><div><div>■</div><div>Replacement of house fuses or resetting of circuit breakers.</div></div><div><div>■</div><div>Failure of the product if it is abused, misused or used for anything other than the intended purpose or used commercially.</div></div><div><div>■</div><div>Damage to product caused by accident, fire, floods or acts of God.</div></div><div><div>■</div><div>Incidental or consequential damage caused by possible defects with this appliance.</div></div></div>

AIR CONDITIONERS 24" Through-the-Wall	
For the period of	GE Appliances will replace
Two years From the date of the original purchase	Any part of the air conditioner which fails due to a defect in materials or workmanship. During this <b>limited two-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

AIR CONDITIONERS Zoneline® and Vertical Zoneline	
For the period of	GE Appliances will replace
One year From the date of the original purchase	Any part of the air conditioner which fails due to a defect in materials or workmanship. During this <b>limited one-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Five years From the date of the original purchase	<b>Sealed Refrigerating System</b> , if any part of the Makeup Air Module or Sealed Refrigerating System (the compressor, condenser, evaporator, and all connecting tubing) should fail due to a defect in materials or workmanship. During this <b>limited five-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Second through fifth year (Zoneline only) From the date of the original purchase	<b>Fan Motors, Switches, Thermostat, Heater, Heater Protectors, Compressor Overload, Solenoids, Circuit Boards, Auxiliary Controls, Thermistors, Frost Controls, Freeze Sentinel, ICR Pump, Capacitors, Varistors and Indoor Blower Bearing</b> , if any of these parts should fail due to a defect in materials or workmanship. During this <b>additional four-year limited warranty</b> , the customer will be responsible for any labor and related service costs.
Second through fifth year (vertical Zoneline only) From the date of the original purchase	<b>Fan Motors, Switches, Thermostat, Heater, Heater Protectors, Compressor Overload, Solenoids, Circuit Boards, Auxiliary Controls, Thermistors, Frost Controls, Freeze Sentinel</b> , if any of these parts should fail due to a defect in materials or workmanship. During this <b>additional four-year limited warranty</b> , the customer will be responsible for any labor and related service costs.

AIR CONDITIONERS 26" Built-In	
For the period of	GE Appliances will replace
Two years From the date of the original purchase	Any part in the air conditioner which fails due to a defect in materials or workmanship. During this <b>limited two-year warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.
Five years From the date of the original purchase	Any part of the Sealed Refrigerating System (compressor, condenser, evaporator, reversing valve and all connecting tubing) which fails due to a defect in materials or workmanship. During this <b>three-year additional warranty</b> , GE Appliances will provide, <b>free of charge</b> , all labor and related service costs to replace the defective part.

PARTS AND ACCESSORIES	
For the period of	GE Appliances will replace
One year From the date of the original purchase	If your GE Appliances part fails because of a manufacturing defect within <b>one year from the date of original purchase</b> , we will provide a new or, at our option, rebuilt part without charge. Return the defective part to the vendor from whom it was purchased with a copy of the "proof of purchase." If the part is defective it will be exchanged. This warranty does not cover parts which are improperly installed, damaged, abused or used for other than the intended purpose. It does not include cost of returning the part to the vendor from which it was purchased, labor to remove, install or diagnose the failure, parts used in commercial applications, incidental or consequential damage caused by possible defects with the parts.  Excludes water filters which offer 30-day warranty.

ACCESSIBILITY REQUIREMENTS

REFRIGERATORS/FREEZERS Uniform Federal Accessibility Standards (UFAS)	
TOP-FREEZERS AND SIDE-BY-SIDES	
Regulation #/ Description:	
<b>4.2.6* Side Reach</b> —If the clear floor space allows parallel approach by a person in a wheelchair, the maximum high side reach allowed shall be 54" (1370 mm) and the low side reach shall be no less than 9" (230 mm) above the floor.	
<b>4.27.4 Operation</b> —Controls and operating mechanisms shall be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no greater than 5lbs (222N).	
<b>4.34.6.8* Refrigerators/Freezers</b> —Refrigerator/freezers shall comply with 4.34.6.3. Provision shall be made for refrigerators which are: (1) Of the vertical side-by-side refrigerator/freezer type; OR (2) Of the over-and-under type and meet the following requirements: (a) Have at least 50 percent of the freezer space below 54" (1370 mm) above the floor. (b) Have 100 percent of the refrigerator space and controls below 54" (1370 mm).	

Americans with Disabilities Act (ADA)/ANSI Standard Requirements	
TOP-FREEZERS AND FRENCH-DOOR BOTTOM-FREEZERS WITH EXTERNAL DISPENSER CONTROLS	
Regulation #/ Description:	
<b>804.6.6 Refrigerators/Freezers</b> —Combination refrigerators and freezers shall have at least 50 percent of the freezer space 54" (1370 mm) maximum above the finish floor or ground. The clear floor or ground space shall be positioned for a parallel approach to the space dedicated to a refrigerator/ freezer with the centerline of the clear floor or ground space offset 24" (610 mm) maximum from the centerline of the dedicated space.	
<b>308.3.1 Unobstructed</b> —Where a clear floor or ground space allows a parallel approach to an element and the side reach is unobstructed, the high side reach shall be 48" (1220 mm) maximum and the low side reach shall be 15" (380 mm) minimum above the finish floor or ground.	
<b>308.3.2 Obstructed High Reach</b> —Where a clear floor or ground space allows a parallel approach to an element and the high side reach is over an obstruction, the height of the obstruction shall be 34" (865 mm) maximum and the depth of the obstruction shall be 24" (610 mm) maximum. The high side reach shall be 48" (1220 mm) maximum for a reach depth of 10" (255 mm) maximum. Where the reach depth exceeds 10" (255 mm), the high side reach shall be 46" (1170 mm) maximum for a reach depth of 24" (610 mm) maximum.	
<b>309.3 Height</b> —Operable parts shall be placed within one or more of the reach ranges specified in 308.3	
<b>309.4 Operation</b> —Operable parts shall be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate operable parts shall be 5lbs (22.2 N) maximum.	

<b>The following appliance categories meet criteria for both the Uniform Federal Accessibility Standards (UFAS) and the Americans with Disabilities Act (ADA) requirements.</b>	
<b>WALL OVENS</b>	
SINGLE SELF-CLEAN OVENS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.7</b> —ovens shall have controls on front panels; they may be located on either side of the door.	
<b>SLIDE-IN/DROP-IN RANGES</b>	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	

<b>The following appliance categories meet criteria for both the Uniform Federal Accessibility Standards (UFAS) and the Americans with Disabilities Act (ADA) requirements.</b>	
<b>WALL OVENS</b>	
SINGLE SELF-CLEAN OVENS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.7</b> —ovens shall have controls on front panels; they may be located on either side of the door.	
<b>SLIDE-IN/DROP-IN RANGES</b>	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	

<b>The following appliance categories meet criteria for both the Uniform Federal Accessibility Standards (UFAS) and the Americans with Disabilities Act (ADA) requirements.</b>	
<b>WALL OVENS</b>	
SINGLE SELF-CLEAN OVENS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	
<b>SLIDE-IN/DROP-IN RANGES</b>	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	

<b>The following appliance categories meet criteria for both the Uniform Federal Accessibility Standards (UFAS) and the Americans with Disabilities Act (ADA) requirements.</b>	
<b>WALL OVENS</b>	
SINGLE SELF-CLEAN OVENS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	
<b>SLIDE-IN/DROP-IN RANGES</b>	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	

<b>The following appliance categories meet criteria for both the Uniform Federal Accessibility Standards (UFAS) and the Americans with Disabilities Act (ADA) requirements.</b>	
<b>WALL OVENS</b>	
SINGLE SELF-CLEAN OVENS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	
<b>SLIDE-IN/DROP-IN RANGES</b>	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	

<b>The following appliance categories meet criteria for both the Uniform Federal Accessibility Standards (UFAS) and the Americans with Disabilities Act (ADA) requirements.</b>	
<b>WALL OVENS</b>	
SINGLE SELF-CLEAN OVENS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	
<b>SLIDE-IN/DROP-IN RANGES</b>	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	

<b>The following appliance categories meet criteria for both the Uniform Federal Accessibility Standards (UFAS) and the Americans with Disabilities Act (ADA) requirements.</b>	
<b>WALL OVENS</b>	
SINGLE SELF-CLEAN OVENS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	
<b>SLIDE-IN/DROP-IN RANGES</b>	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	

<b>The following appliance categories meet criteria for both the Uniform Federal Accessibility Standards (UFAS) and the Americans with Disabilities Act (ADA) requirements.</b>	
<b>WALL OVENS</b>	
SINGLE SELF-CLEAN OVENS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	
<b>SLIDE-IN/DROP-IN RANGES</b>	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	

<b>The following appliance categories meet criteria for both the Uniform Federal Accessibility Standards (UFAS) and the Americans with Disabilities Act (ADA) requirements.</b>	
<b>WALL OVENS</b>	
SINGLE SELF-CLEAN OVENS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	
<b>SLIDE-IN/DROP-IN RANGES</b>	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	

<b>The following appliance categories meet criteria for both the Uniform Federal Accessibility Standards (UFAS) and the Americans with Disabilities Act (ADA) requirements.</b>	
<b>WALL OVENS</b>	
SINGLE SELF-CLEAN OVENS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	
<b>SLIDE-IN/DROP-IN RANGES</b>	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	

<b>The following appliance categories meet criteria for both the Uniform Federal Accessibility Standards (UFAS) and the Americans with Disabilities Act (ADA) requirements.</b>	
<b>WALL OVENS</b>	
SINGLE SELF-CLEAN OVENS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	
<b>SLIDE-IN/DROP-IN RANGES</b>	
ELECTRIC AND GAS	
Regulation #/ Description:	
<b>4.2.5</b> —maximum high forward reach for controls and operating mechanisms is 48", minimum low forward reach is 15".	
<b>4.27.4</b> —controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbs.	
<b>4.34.6.6</b> —if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.	


GE Appliances has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

COUNTER-DEPTH FRENCH-DOOR REFRIGERATORS


	GE PROFILE™				GE				
	PYE22PYN	PYD22KYN	PYE22KBL PYE22KYN PYE22KMK PYE22KEL	PWE23KYN PWE23KMK PWE23KEL	GYE22GYN GYE22GMN GYE22GEN		GWE23GYN GWE23GMN GWE23GEN	GWE19JYL GWE19JML GWE19JGL	GYE18JYL GYE18JML
ENERGY STAR® certified	●		●	●	●		●	●	●
WiFi Connect	Built-in	Optional††	Optional††	Optional††	Optional		Optional	Optional††	Optional††
Sabbath mode capable	●	●	●	●	●		●	●	●
ADA compliant	●	●	●		●				●
CAPACITY									
Total (cu. ft.)	22.1	22.1	22.1	23.1	22.1		23.1	18.6	17.5
Fresh food (cu. ft.)	14.92	14.89	14.92	15.93	14.92		15.93	13.59	12.5
Freezer (cu. ft.)	7.16	7.18	7.16	7.16	7.16		7.16	5.01	5.01
FRESH-FOOD FEATURES									
Door in Door		●							
TwinChill™ evaporators	●	●	●	●	●		●		
External controls with temperature display and child lock	●	●	●						●
Door alarm	●	●	●	●	●		●	●	●
Turbo Cool setting	●	●	●		●			●	●
Cabinet shelves	5 glass	5 glass	5 glass	5 glass	6 glass		5 glass	5 glass	5 glass
Adjustable	4 split	4 split	4 split	4 split	5 split		4 split	4	4
Full-width	1	1	1	1	1		1	1	1
Spillproof	3	3	3	3	4		4		
Quick Space shelf	●	●	●	●				●	●
External dispenser	Ice & water	Ice & water	Ice & water		Ice & water				Ice & water
Keurig® K-Cup® brewing system	●								
Hot water	●								
Hands-free Autofill		●	●						
Internal water dispenser				●				●	
Advanced filtration system	RPWFE	RPWFE	RPWFE	RPWFE	RPWFE		RPWFE	XWFE	XWFE
Water filter indicator light	●	●	●	●	●		●	●	●
Humidity-controlled drawers	2	2	2	2	2		2	2	2
Full-width drawer	Electronic w/color LED lighting	Electronic w/color LED lighting	Electronic w/color LED lighting	Electronic w/color LED lighting			Electronic with LED lighting	●	●
Fresh-food door bins	6 (3 w/gallon storage, 2 adj.)	6 (1 rotating)	6 (3 w/gallon storage, 2 adj.)	6 (4 adj. with gallon storage)	6 (2 w/gallon storage, 2 adj.)		6 (4 adj. with gallon storage)	8 (6 adjustable, 2 fixed)	7 (3 adjustable, 4 fixed)
Drop-down tray	●		●	●					
Dairy compartment	●		●	●			●		
Showcase LED lighting	7 + colored full-width drawer	Full-width drawer	7 + colored full-width drawer	7 + colored full-width drawer			7 + full-width drawer	●	●
FREEZER FEATURES									
Space-saving icemaker	●	●	●		●				
Factory-installed icemaker & bin		Optional 2nd icemaker (IM5D)	Optional 2nd icemaker (IM5D)	●			●	●	
Turbo Freeze setting	●	●	●		●				
Frost Guard technology	●	●	●	●			●	●	●
Full-width, full-extension plastic freezer bins	2 + door bin	2 + door bin	2 + door bin	2 + door bin	2		2	2 full-width, full-extension plastic baskets	2 full-width, full-extension plastic baskets
Showcase LED lighting	2	2	2	2	2		2	●	●
EXTERIOR									
Color(s) available*	FS	FS	TS/FS/ES/DS	FS/ES/DS	FS/ES/DS		FS/ES/DS	FS/ES/WW, BB	FS/ES
Handle color	Fingerprint Resistant Stainless	Fingerprint Resistant Stainless	Black Stainless Fingerprint Resistant Stainless Slate Black Slate	Fingerprint Resistant Stainless Stainless with chrome Black Stainless Black Slate	Fingerprint Resistant Stainless Slate Black Slate		Fingerprint Resistant Stainless Slate Black Slate	Stainless Stainless Color-matched Designer-style	Stainless with chrome Stainless with chrome Designer-style
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style		Designer-style	Designer-style	Designer-style
Door design	Contoured	Contoured	Contoured	Contoured	Contoured		Contoured	Contoured	Contoured
Textured steel case color	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)		Case only (dark gray)	Case only (dark gray) Case only (dark gray) Case only (color-matched)	Case only (dark gray)
Door	Fingerprint Resistant Stainless	Fingerprint Resistant Stainless	Black Stainless Fingerprint Resistant Stainless Slate Black Slate	Fingerprint Resistant Stainless Slate Black Slate	Fingerprint Resistant Stainless Slate Black Slate		Fingerprint Resistant Stainless Slate Black Slate	Fingerprint Resistant Stainless Slate White, Black	Stainless Slate
Door stops	●	●	●	●	●		●	●	●
Adjustable rollers	2	2	2	2	2		2	2	2
WEIGHTS & DIMENSIONS									
Height to top of door (in.) A	70-1/2	70-1/2	70-1/2	70-1/2	70-1/2		70-1/2	69-7/8	69-7/8
Height to top of hinge (in.) B	69-7/8	69-7/8	69-7/8	69-7/8	69-7/8		69-7/8	69-3/4	69-3/4
Height to top of case (in.) C	69	69	69	69	69		69	68-5/8	68-5/8
Case depth without door (in.) D†	24-3/8	24-3/8	24-3/8	24-3/8	24-3/8		24-3/8	24-1/8	24-1/8
Case depth less door handle (in.) E†	29-3/4	29-3/4	29-3/4	28-3/4	29-3/4		28-3/4	29	29
Case depth with door handle (in.) F†	31-1/4	31-1/4	31-1/4	31-1/4	31-1/4		31-1/4	31	31
Depth w/fresh-food door open 90° (in.) G†	43-3/8	43-3/8	43-3/8	43-3/8	43-3/8		43-3/8	42	42
Width (in.) H	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4		35-3/4	32-3/4	32-3/4
Width w/door open 90° w/door handle (in.) I	44-5/8	48-3/4	44-5/8	44-5/8	44-5/8		44-5/8	40-1/2	40-1/2
Each side (in.)	1/8	0-1/8	1/8	1/8	1/8		1/8	1/8	1/8
Top (in.)	1	1	1	1	1		1	1	1
Air clearances Back (in.)	2	2	2	2	2		2	2	2
Approximate shipping wt. (lbs.)	363	383	363	363	390		375	252	274
Power/Rating	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps		120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: FS = Fingerprint Resistant Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White, B = Black.  
\*\*Includes hot water knob.  
†Water hookup fits in back air clearance when calculating installation depth.  
††SmartHQ™ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0BB.  
ALL MODELS AVAILABLE IN U.S. AND CANADA.

FRENCH-DOOR REFRIGERATORS  
DIMENSIONS



TOP VIEW

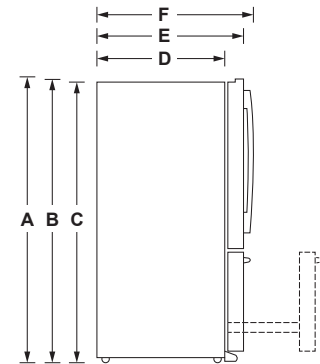

SIDE VIEW

**IMPORTANT:** Before finalizing specifications for your counter-depth refrigerator, please NOTE:

- A minimum width of 36" is required for refrigerator installation
- Be sure to allow for 1/2" or 3/4" side panels in addition to the 36" minimum




FRENCH-DOOR REFRIGERATORS

	GE PROFILE™				GE	
	PVD28BYN	PFE28PYN	PFD28KYN	PFE28KYN PFE28KBL PFE28KMK	GFE28GYN GFE28GMK GFE28GEL	GNE29GYN GNE29GMK
ENERGY STAR® certified	●	●		●	●	●
WiFi Connect	●	●	Optional††	Optional††	Optional††	Optional††
Sabbath mode capable	●	●	●	●	●	●
ADA compliant		●	●	●	●	
CAPACITY						
Total (cu. ft.)	27.9	27.7	27.7	27.7	27.7	28.7
Fresh food (cu. ft.)	19.33	18.50	18.50	18.50	18.48	19.57
Freezer (cu. ft.)	8.57	9.17	9.17	9.17	9.17	9.17
FRESH-FOOD FEATURES						
Door in Door	●		●			
TwinChill™ evaporators	●	●	●	●	●	●
External controls with temperature display and child lock		●	●	●	●	
Door alarm	●	●	●	●	●	●
Turbo Cool setting	●			●		
Cabinet shelves	4 glass	5 glass	5 glass	5 glass	5 glass	5 glass
Adjustable	2	4 split	4 split	4 split	4 split	4 split
Full-width	1	1	1	1	1	1
Spillproof		3	3	3	4	4
Quick Space shelf	1	●	●	●		
External dispenser	Ice & water	Ice & water	Ice & water	Ice & water	Ice & water	
Keurig® K-Cup® brewing system		●				
Hot water		●		●		
Hands-free Autofill			●	●		
Precise Fill						●
Adjustable-humidity drawers	2	2	2	2	2	2
Full-width drawer		Electronic with color LED lighting	Electronic with color LED lighting	Electronic with color LED lighting	●	Electronic with LED lighting
Fresh-food door bins	6 (3 with gallon storage, 2 adj.)	6 (3 with gallon storage, 2 adj.)	6 (1 rotating)	6 (3 with gallon storage, 2 adj.)	6 (3 with gallon storage, 2 adj.)	6 (4 adj. with gallon storage)
Drop-down tray		●		●		
Dairy compartment	●					●
Showcase LED lighting		7 + colored full-width drawer	7 + colored full-width drawer	7 + colored full-width drawer	5	7 + full-width drawer
FREEZER FEATURES						
Space-saving icemaker	●	●	●	●	●	
Factory-installed icemaker & bin			Optional 2nd icemaker (IM5D)	Optional 2nd icemaker (IM5D)	Optional 2nd icemaker (IM5D)	●
Turbo Freeze setting	●	●	●	●	●	
Frost Guard technology	●	●	●	●	●	●
Full-width, full-extension plastic freezer bins	2	2 + door bin	2 + door bin	2 + door bin		2
Showcase LED lighting	●	2	2	2	2	2
EXTERIOR						
Color(s) available*	FS	FS	FS	FS / TS / ES	FS / ES / DS	FS / ES
Handle color	Stainless w/Chrome	Fingerprint Resistant Stainless	Fingerprint Resistant Stainless	Fingerprint Resistant Stainless Black Stainless Slate	Fingerprint Resistant Stainless with chrome Black Stainless	Fingerprint Resistant Stainless Slate
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Door design	Contoured	Contoured	Contoured	Contoured	Contoured	Contoured
Textured steel case color	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)	Case only (dark gray)
Door stops	●	●	●	●	●	●
Adjustable rollers	2	2	2	2	2	2
WEIGHTS & DIMENSIONS						
Height to top of door (in.) A	69-7/8	70-1/2	70-1/2	70-1/2	70-1/2	70-1/2
Height to top of hinge (in.) B	69-3/4	69-7/8	69-7/8	69-7/8	69-7/8	69-7/8
Height to top of case (in.) C	68-5/8	69	69	69	69	69
Case depth without door (in.) D†	29	29-3/8	29-3/8	29-3/8	29-3/8	29-3/8
Case depth less door handle (in.) E†	34-1/4	34-3/4	34-3/4	34-3/4	34-3/4	34-3/4
Case depth with door handle (in.) F†	36-3/4	36-1/4	36-1/4	36-1/4	36-1/4	36-1/4
Depth w/fresh-food door open 90° (in.) G†	48-3/8	35-5/8	48-3/8	48-3/8	48-3/8	48-3/8
Width (in.) H	35-5/8	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4
Width w/door open 90°with door handle (in.) I	44-7/8	48-3/4	44-5/8	44-5/8	44-5/8	44-5/8
Air clearances	Each side (in.) 1/8 Top (in.) 1 Back (in.) 2	1/8 1 2	1/8 1 2	1/8 1 2	1/8 1 2	1/8 1 2
Approximate shipping wt. (lbs.)	410	390	410	390	390	375
Power/Rating	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: FS = Fingerprint Resistant Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate.  
\*\*Includes hot water knob.  
†Water hookup fits in back air clearance when calculating installation depth.  
††SmartHQ™ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.  
ALL MODELS AVAILABLE IN U.S. AND CANADA.

FRENCH-DOOR REFRIGERATORS DIMENSIONS

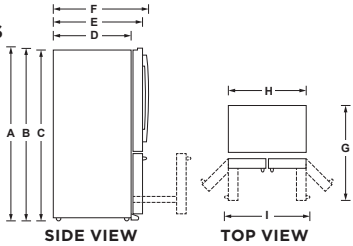


SEE PAGE 303 FOR INSTALLATION INFORMATION.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

	GE				
	GFE26JYM GFE26JMM GFE26JEM GFE26JGM	GNE27JYM GNE27JMM GNE27JGM	GFE24JYK GFE24JMK	GNE25JYK GNE25JMK GNE25JGK	GNE21FYK
ENERGY STAR certified	●	●	●	●	●
Sabbath mode capable	●	●	●	●	●
WiFi Connect	Optional†	Optional†	Optional†	Optional†	Optional†
ADA compliant	●		●		
CAPACITY					
Total (cu. ft.)	25.6	27	23.7	24.7	20.8
Fresh food (cu. ft.)	17.45	18.81	16.46	17.44	14.76
Freezer (cu. ft.)	8.18	8.18	7.28	7.28	6.04
FRESH-FOOD FEATURES					
External controls with child lock	●		●		
Door alarm	●	●	●	●	●
Upfront temperature controls		●		●	●
Turbo Cool setting	●	●	●	●	●
Spillproof cabinet shelves	5 glass	5 glass	5 glass	5 glass	3 glass
Adjustable	4 split	4 split	4	4	2
Full-width	1	1	1	1	3
Quick Space shelf	●	●	●	●	
External dispenser	Ice & water		Ice & water		
Internal water dispenser		●		●	
In-the-door ice system	●		●		
Advanced filtration system	XWFE	XWFE	XWFE	XWFE	XWFE
Water filter indicator light			●	●	●
Multi-level drawers			●	●	●
Full-width drawer	●	●	●	●	●
Humidity-controlled drawers	2	2	2	2	2
Fresh-food door bins	7 (3 adjustable with gallon storage)	8 (6 adjustable with gallon storage)	7 (3 adjustable, 4 fixed)	8 (6 adjustable, 2 fixed)	8 (6 adjustable, 2 fixed)
LED lighting	●	●	●	●	●
FREEZER FEATURES					
Factory-installed icemaker		●		●	●
Frost Guard technology	●	●	●	●	●
Freezer storage basket(s)	2 full-width, full-extension plastic	2 full-width, full-extension with ice bin	2 full-width, full-extension plastic	2 full-width, full-extension with ice bin	2 full-width, full-extension with ice bin
LED lighting	●	●	●	●	●
EXTERIOR					
Color(s) available*	FS ES DS WW, BB	SS ES WW, BB	FS ES	FS ES WW, BB	FS
Handle color	Stainless Stainless Black Stainless White, Black	Stainless Stainless Color-matched	Stainless Stainless	Stainless Stainless Color-matched	Stainless
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Field-installed handles	●	●	●	●	●
Door design	Contoured	Contoured	Contoured	Contoured	Contoured
Textured steel case	White, Black Case only (dk. gray)	Case only (dk. gray)	Case only (dk. gray)	Case only (dk. gray) Case only (dk. gray) Case only (color-matched)	Case only (dk. gray)
Door	Black Stainless Stainless Slate Black Slate White, Black	Stainless Slate High-gloss	Stainless Slate	Stainless Slate High-gloss	Stainless
Door stops	●	●	●	●	●
Adjustable leveling legs	Front	Front	Front	Front	Front
WEIGHTS & DIMENSIONS					
Height to top of door (in.) A	69-7/8	69-7/8	69-7/8	68-7/8	69-7/8
Height to top of hinge (in.) B	69-3/4	69-3/4	69-3/4	69-3/4	69-3/4
Height to top of case (in.) C	68-5/8	68-5/8	68-5/8	68-5/8	68-5/8
Case depth without door (in.) D†	29-1/2	29-1/2	30-5/8	30-5/8	29-3/4
Case depth less door handle (in.) E†	33-7/8	33-7/8	35	35	34-1/8
Case depth with door handle (in.) F†	36-3/8	36-3/8	37-1/2	37-1/2	36-5/8
Depth with fresh-food door open 90°(in.) G†	48-3/4	48-3/4	47-3/4	47-3/4	46-1/8
Width (in.) H	35-5/8	35-5/8	32-3/4	33	29-3/4
Width w/door open 90° with door handle (in.) I	43-3/4	43-3/4	40-7/8	40-7/8	37-7/8
Each side (in.)	1/8	1/8	1/8	1/8	1/8
Top (in.)	1	1	1	1	1
Back (in.)	2	2	2	2	2
Air clearances	2	2	2	2	2
Approximate shipping wt. (lbs.)	303	332	302	275	232
Power/Rating	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White, BB = Black.  
†SmartHQ Connect Module is required and sold separately. It is available for order on geappliances.com, part number PBX23W00Y0.

FRENCH-DOOR REFRIGERATORS DIMENSIONS

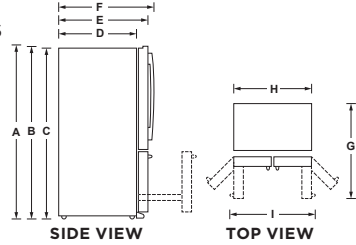

SEE PAGE 303 FOR INSTALLATION INFORMATION.


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

BOTTOM-FREEZER REFRIGERATORS

	GE			
	GDE25EYK	GDE21EYK	GBE21DYK	GLE12HSP
ENERGY STAR® certified	●	●	●	●
Sabbath mode capable	●	●		●
WIFI Connect	Optional†	Optional†	Optional†	
CAPACITY				
Total (cu. ft.)	24.8	21.0	21.0	11.9
Fresh food (cu. ft.)	17.55	14.93	14.92	7.71
Freezer (cu. ft.)	7.28	6.04	6.04	4.19
FRESH-FOOD FEATURES				
Door alarm	●	●		
Upfront temperature controls	●	●		Internal
Turbo Cool setting	●	●		
Cabinet shelves	3 glass	3 glass	3 glass	3 glass
Adjustable				1
Full-width	3 (2 adjustable)	3 (2 adjustable)	3 (2 adjustable)	3
GE water filtration	XWFE	XWFE		
Water filter indicator light	●	●		
Full-width drawer				●
Crisper drawers	2 humidity-controlled	2 humidity-controlled	2 humidity-controlled	1 TempSelectZone crisper
Sliding snack drawer	Clear	Clear		
Clear Look door bins	4 clear (2 adj., 2 full-width fixed)	4 clear (2 adj., 2 full-width fixed)	4 clear (2 adj., 2 full-width fixed)	3 full-width
LED lighting	●	●	●	●
Bottle storage rack				●
FREEZER FEATURES				
Factory-installed icemaker	●	●	Opt. (IM4D)	Opt. (IM4D)
Frost Guard technology	●	●	●	●
Freezer storage basket(s)	2 full-width, full-extension with ice bin	2 full-width, full-extension with ice bin	1 full-width	2 drawers
Wire compartment shelves			1 full-width	2-level system; drawer divider & pan
LED lighting	●	●	●	●
EXTERIOR				
Color(s) available*	FS	FS	FS	SS
Counter-depth configuration				●
Handle color	Stainless	Stainless	Stainless	Stainless
Handle design	Designer-style	Designer-style	Designer-style	Recessed
Field-installed handles	●	●	●	
Door design	Contoured	Contoured	Contoured	Contoured
Textured steel case	Case only (dk. gray)	Case only (dk. gray)	Case only (dk. gray)	Dark gray
Door	Stainless	Stainless	Stainless	Stainless
Door stops	●	●	●	●
Reversible doors		●	●	
Right or Left door opening	●	●	●/●	●
Adjustable leveling legs	Front	Front	Front	●
WEIGHTS & DIMENSIONS				
Height to top of door (in.) A	69-7/8	69-7/8	69-7/8	70
Height to top of hinge (in.) B	69-3/4	69-3/4	69-3/4	70
Height to top of case (in.) C	68-5/8	68-5/8	68-5/8	69-7/8
Case depth without door (in.) D†	30-5/8	29-3/4	29-3/4	23-1/2
Case depth less door handle (in.) E†	35	34-1/8	34-1/8	26-1/2
Case depth with door handle (in.) F†	37-1/2	36-5/8	36-5/8	26-1/2
Depth with fresh-food door open 90° (in.) G†	65-1/8	61-1/4	61-1/4	47-3/8
Width (in.) H	32-3/4	29-3/4	29-3/4	23-1/2
Width w/door open 90° with door handle (in.) I	36-7/8	33-7/8	33-7/8	24-7/8
Each side (in.)	1/8	1/8	1/8	1/8
Top (in.)	1	1	1	1
Air clearances Back (in.)	2	2	2	1
Approximate shipping wt. (lbs.)	275	232	232	192
Power/Rating	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: FS = Fingerprint Resistant Stainless, ES = Slate, WW = White, BB = Black.  
†SmartHQ™ Connect Module is required and sold separately. It is available for order on [geappliances.com](http://geappliances.com), part number PBX23W00Y0.

BOTTOM-FREEZER REFRIGERATORS DIMENSIONS




SEE PAGE 303 FOR INSTALLATION INFORMATION.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


BOTTOM-FREEZER INSTALLATION INFORMATION & SPECIFICATIONS

ROUGH-IN DIMENSIONS  
STANDARD, NEW CONSTRUCTION AND REPLACEMENT INSTALLATION


- Installation tips to maximize the built-in look**
- All wall/floor molding should be removed prior to installation.
  - Water recess on rear wall recommended to prevent water line damage. 48" minimum length, 1/4"-diameter water line tubing recommended.
  - When possible, recess both copper/pex water line and electrical outlet (see local codes).
  - Front and rear leveling legs are adjustable for the built-in look (see owner's manual).

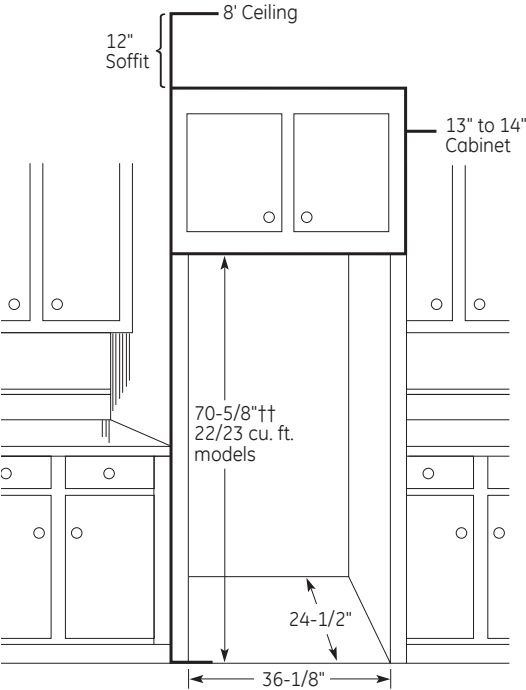

††The rough-in dimension of 70-5/8" is measured from the finished floor to top of opening (or the underside of overhead cabinets).

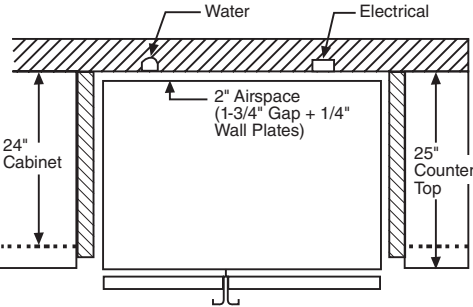

INSTALLATION OF WATER OUTLETS  
FOR ALL FRENCH-DOOR, BOTTOM-FREEZER & SIDE-BY-SIDE MODELS

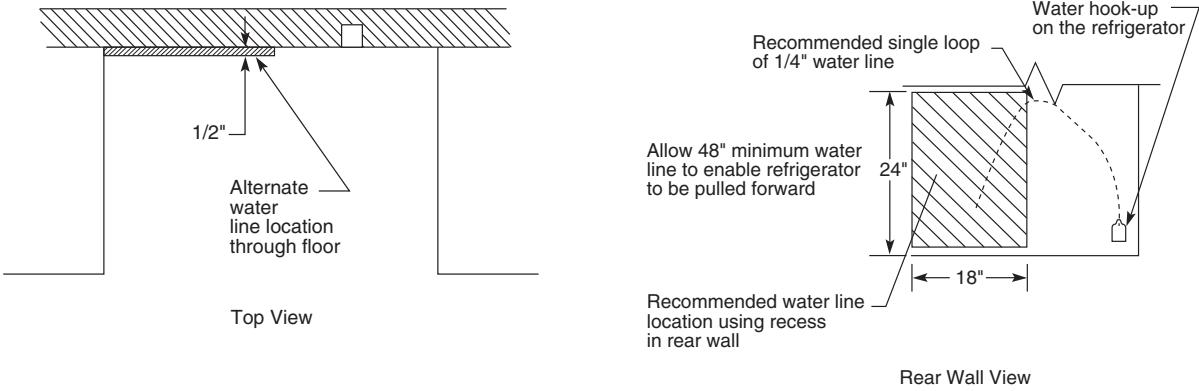

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.




BUILT-IN SIDE-BY-SIDE REFRIGERATORS

	GE PROFILE™
	PSB48YSN PSB42YSN
Stainless model	●
WiFi Connect	●
UFAS compliant	●
CAPACITY	
Total (cu. ft.)	28.7 24.5
Fresh food (cu. ft.)	17.23 15.82
Freezer (cu. ft.)	11.44 8.65
FRESH-FOOD FEATURES	
Multi-flow air system	●
Digital temperature display	●
Electronic sensors	●
Dispenser	●
Light	●
Door alarm	●
Turbo Cool setting	● (in app)
GE water filtration system	MWF
Water filter indicator light	●
Cabinet shelves	4 (3 adjustable)
Adjustable	3
Spillproof	4
Top drawer	Snack
Middle drawer	Sealed
Bottom drawer	Select Temp
Clear Look door bins	5
LED lighting	●
Never Clean condenser	●
FREEZER FEATURES	
Turbo Freeze setting	● (in app)
Factory-installed icemaker & bin	●
Drawer/Basket	2
Wire cabinet shelves	4 adj.
Door bins	3
LED lighting	●
EXTERIOR	
Color(s) available*	SS SS
Handle color	Stainless
Door hinge	Hidden
Adjustable rollers	2
WEIGHTS & DIMENSIONS	
Height to top of hinge (in.) A	84
Height to top of case (in.) B	83-1/2
Case depth without door (in.) C	23-7/8
Case depth less door handle (in.) D	25-3/4
Case depth with door handle (in.) E	28-3/8
Depth with fresh-food door open 90° (in.) F	52-1/2 50-1/2
Width (in.) G	48 42
Width with door open 90° incl. door handle (in.) H	53-7/8 48-1/4
Approx. shipping wt. (lbs.)	775/725
Power/Rating	115V, 60Hz, 20Amps


\*Color(s) available: SS = Stainless.  
If installed against a wall, allow clearance of 4" on freezer side to remove bin. Clearance required to remove fresh-food full-size pan without disassembling is 4".  
ALL MODELS AVAILABLE IN U.S. AND CANADA.

BUILT-IN SIDE-BY-SIDE REFRIGERATORS DIMENSIONS

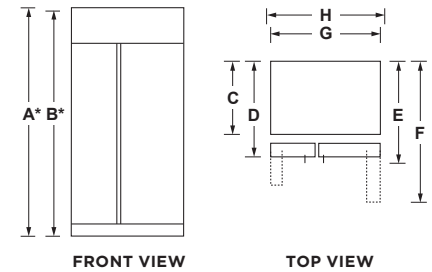

\*Shipping height. Use leveling legs and wheels for maximum 1" height adjustments from shipping height.

INSTALLATION SPACE

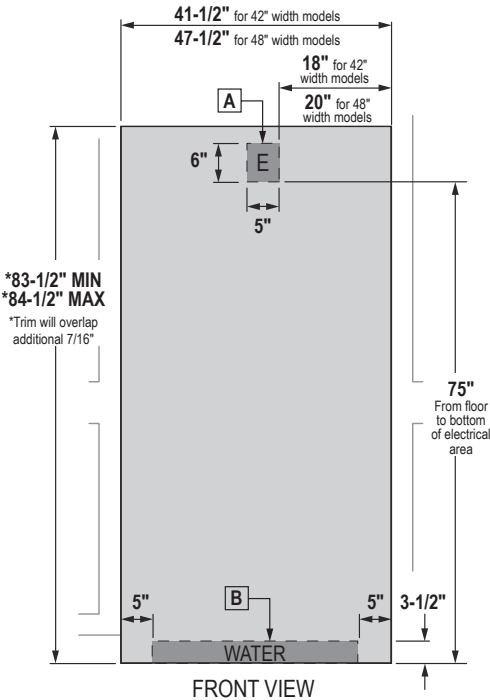

A - Mounting the junction box in this location will also allow for front accessibility through access panel.

B - Water supply area.

**WARNING!** The refrigerator is top-heavy and must be secured to prevent the possibility of tipping forward. Failure to do so may result in serious injury or death.

The information provided is for cabinet design only. When installing the anti-tip system, you must use the product installation instructions.

See installation instructions for detailed instructions.

SEE PAGE 303 FOR WATER OUTLET INSTALLATION.


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

COUNTER-DEPTH SIDE-BY-SIDE REFRIGERATORS

	GE PROFILE	GE	
	PZS22MYK	GZS22IYN GZS22IMN	GZS22DSJ GZS22DMJ GZS22DGJ
UFAS compliant	●	●	●
CAPACITY			
Total (cu. ft.)	21.9	21.8	21.9
Fresh food (cu. ft.)	14.24	14.23	14.07
Freezer (cu. ft.)	7.70	7.56	7.79
FRESH-FOOD FEATURES			
Multi-flow air system	●		●
Electronic sensors	●	●	●
Actual-temperature display	●	●	●
External controls	●	●	●
Turbo Cool setting	●		
GE water filtration system	XWFE	XWFE	XWFE
Dispenser	Crushed ice, cubes, water	Crushed ice, cubes, water	Crushed ice, cubes, water
Light	LED	LED	LED
Child lock and door alarm	●	●	●
Quick Ice feature	●		
Water filter indicator light	●	●	●
Cabinet shelves	4 glass	4 glass	4 glass
Adjustable	3	3	3
Slide-out, spillproof	2 (3 spillproof)		3 (4 spillproof)
Crisper cover (fixed)	1		
Quick Space shelf	●		
Integrated shelf-support system	●	●	●
Snugger clip(s)	2		
Drawer system	3-stack	3-stack	2-stack
Top drawer	Snack	Snack	Adj.-humidity
Middle drawer	Adj.-humidity	Adj.-humidity	
Bottom drawer	Sealed		Sealed
Clear Look door bins	4 (3 adj.)	4 (3 adj.)	4 (2 adj.)
Door shelves		5 total, fixed	
LED lighting	●	●	●
Dairy compartment	●	●	●
Never Clean condenser	●	●	●
FREEZER FEATURES			
Frost Guard technology	●	●	●
Icemaker	Integrated	Factory-installed	●
Drawer/Basket	2 drawers	2	1 wire basket
Cabinet shelves	3 glass	3 glass	2 glass, 1 wire
Wire tilt-out door bin(s)	3 adj.		
Door bin	1 fixed	5 fixed	5 fixed
Interior lighting	●	●	●
EXTERIOR			
Color(s) available*	FS	FS/ES	SS/ES WW, BB
Handle color	Stainless with chrome	Color-matched	Stainless with chrome Stainless with chrome
Handle design	Designer-style	Designer-style	Color-matched Designer-style
Door design	Contoured	Contoured	Flat front with rounded sides Flat front with rounded sides High-gloss flat front with rounded sides
Textured steel door and case	Case only (dark gray)	Case only (dark gray) Color-matched (color models)	Case only (dark gray) Case only (dark gray) Case only (color-matched)
Adjustable rollers	Front	2-point adjustable	Front
WEIGHTS & DIMENSIONS			
Height to top of hinge (in.) A	69-7/8	70-1/8	69-1/4
Height to top of case (in.) B	69	69	68-3/4
Case depth without door (in.) C	24-1/8	24-1/4	24-1/8
Case depth less door handle (in.) D	28-1/2	28-3/4	27
Case depth with door handle (in.) E	30-3/4	30-3/4	29-1/2
Depth with fresh-food door open 90° (in.) F	46-1/4	46-1/2	46
Width (in.) G	35-3/4	36	35-3/4
Width with door open 90° with door handle (in.) H	43-1/8	42-1/4	41-3/8
Each side (in.)	1/8	1/8	1/8
Top (in.)	1	1	1
Back (in.)	2	2	2
Air clearances	360	340	360
Approx. shipping wt. (lbs.)			
Power/Rating	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, FS = Fingerprint Resistant Stainless, ES = Slate, DS = Black Slate, WW = White, BB = Black.  
If installed against a wall, allow clearance of 14" on freezer side to remove bin. Clearance required to remove fresh-food full-size pan without disassembling is 18-5/8".  
ALL MODELS AVAILABLE IN U.S. AND CANADA.

COUNTER-DEPTH SIDE-BY-SIDE REFRIGERATORS DIMENSIONS




Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

See page 294 for warranty information.

ROUGH-IN DIMENSIONS STANDARD, NEW CONSTRUCTION AND REPLACEMENT INSTALLATION

- Installation tips to maximize the built-in look**
- All wall/floor molding should be removed prior to installation.
  - Water recess on rear wall recommended to prevent water line damage. 48" minimum length, 1/4"-diameter water line tubing recommended.
  - When possible, recess both copper water line and electrical outlet (see local codes).
  - Front and rear leveling legs are adjustable for the built-in look (see owner's manual).

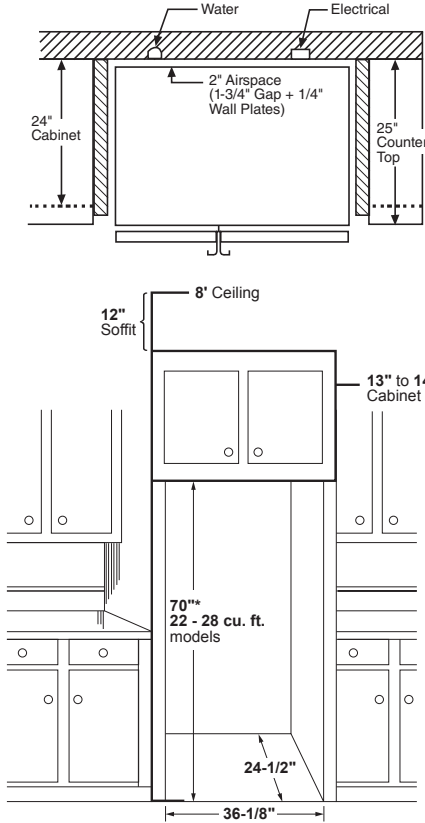

\*The rough-in dimension of 70" for 22-28 cu. ft. models is minimum and measured from the finished floor to top of opening (or the underside of the overhead cabinets).

**IMPORTANT:** Before finalizing specifications for your counter-depth refrigerator, please NOTE: A minimum width of 36" is required for refrigerator installation.

SEE PAGE 303 FOR WATER OUTLET INSTALLATION.


geappliances.com 305

GE PROFILE™ SIDE-BY-SIDE REFRIGERATOR

	“K” SERIES
	PSE25KYH
ENERGY STAR® certified	●
UFAS compliant	●
CAPACITY	
Total (cu. ft.)	25.3
Fresh food (cu. ft.)	16.23
Freezer (cu. ft.)	9.03
FRESH-FOOD FEATURES	
Air tower	●
Electronic sensors	●
Actual-temperature display	●
External controls	●
Turbo Cool setting	●
GE water filtration system	XWFE
Dispenser	Crushed ice, cubes, water
Integrated design	●
Light	LED
Child lock and door alarm	●
Quick Ice feature	●
Water filter indicator light	●
Cabinet shelves	4 glass
Adjustable	3
Slide-out, spillproof	2
Crisper cover (fixed)	1
Quick Space shelf	●
Integrated shelf-support system	●
3-stack drawer system	●
Top drawer	Snack
Middle drawer	Adj.-humidity
Bottom drawer	Adj.-humidity
Clear Look door bins	4 (3 adj. w/gallon storage)
Interior lighting	LED
FREEZER FEATURES	
Frost Guard technology	●
Arctica icemaker	●
Storage baskets	3
Cabinet shelves	2 glass
Door bins	3 (2 adj.)
Interior lighting	LED
EXTERIOR	
Color(s) available*	FS
Handle color	Stainless with chrome
Handle design	Designer-style
Door design	Contoured
Door hinge	Hidden
Textured steel door and case	Case only (dark gray)
Adjustable rollers	Front
WEIGHTS & DIMENSIONS	
Height to top of hinge (in.) A	69-1/4
Height to top of case (in.) B	68-3/4
Case depth without door (in.) C†	28-1/2
Case depth less door handle (in.) D†	32-3/4
Case depth with door handle (in.) E†	35-1/4
Depth w/fresh-food door open 90° (in.) F†	50-1/2
Width (in.) G	35-3/4
Width w/door open 90° w/door handle (in.) H	43-1/2
Each side (in.)	1/8
Top (in.)	1
Air clearances Back (in.)	2
Approximate shipping wt. (lbs.)	380
Power/Rating	120V, 60Hz, 15Amps

\*Color(s) available: FS = Fingerprint Resistant Stainless.  
†Water hookup fits in back air clearance when calculating installation depth. If installed against a wall, allow clearance of 14-3/16" on 25 cu. ft. and 28 cu. ft. models on freezer side to remove ice bin. To remove fresh-food pans, remove door bins. Clearances required to remove fresh-food full-size pan without disassembling: 19" on 25 cu. ft. and 28 cu. ft. Allow additional space for any necessary leveling adjustments.  
ALL MODELS AVAILABLE IN U.S. AND CANADA.

SIDE-BY-SIDE REFRIGERATORS  
DIMENSIONS

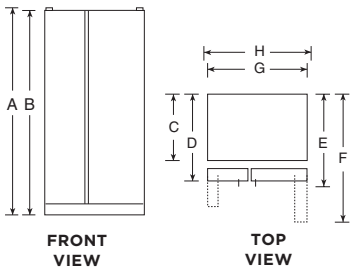

SEE PAGE 303 FOR WATER OUTLET INSTALLATION.


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

GE SIDE-BY-SIDE REFRIGERATORS

	“I” SERIES	“G” SERIES			
	GSS25IYN GSS25IMN	GSE25GYP GSE25GGP	GSS25GYP GSS25GMP GSS25GGP	GSE23GYP GSE23GGP	GSS23GYP GSS23GMP GSS23GGP
ENERGY STAR certified		●		●	
UFAS compliant	●	●	●	●	●
CAPACITY					
Total (cu. ft.)	25.1	25.3	25.3	23.2	23.2
Fresh food (cu. ft.)	16.23	16.07	16.07	16.23	16.23
Freezer (cu. ft.)	8.91	9.25	9.25	6.94	6.94
FRESH-FOOD FEATURES					
Electronic sensors	●	●	●	●	●
Exterior temperature controls	Actual-temp.	Actual-temp.	Actual-temp.	Actual-temp.	Actual-temp.
GE water filtration system	XWFE	XWFE	XWFE	XWFE	XWFE
Dispenser	Water, cubed/ crushed ice	Arctica icemaker with crushed ice, cubes & water	Arctica icemaker with crushed ice, cubes & water	Arctica icemaker with crushed ice, cubes & water	Arctica icemaker with crushed ice, cubes & water
Light and child lock	Yes	Yes	Yes	Yes	Yes
Door alarm	●	●	●	●	●
Water filter indicator light	●	●	●	●	●
Cabinet shelves	4 glass, edge-to-edge	4 glass, edge-to-edge	4 glass, edge-to-edge	4 glass, edge-to-edge	4 glass, edge-to-edge
Adjustable	3	3	3	3 (2 slide-out)	3 (2 slide-out)
Slide-out, spillproof	3 (slide-out)	3 (2 slide-out)	3 (2 slide-out)	●	●
Integrated shelf support system	●	●	●	●	●
Drawer system	3	3	3	3	3
Top drawer	Adj.-humidity	Adj.-humidity	Adj.-humidity	Adj.-humidity	Adj.-humidity
Bottom drawer	●	●	●	●	●
Snack drawer	●	Floating	Floating	Floating	Floating
Door bins	4 (3 adj. with gallon storage)	4 (2 adj. with gallon storage)	4 (2 adj. with gallon storage)	4 (2 adj. with gallon storage)	4 (2 adj. with gallon storage)
Dairy compartment	●	●	●	●	●
Interior lighting	LED	LED	LED	LED	LED
FREEZER FEATURES					
Frost Guard technology	●	●	●	●	●
Factory-installed icemaker	●	●	●	●	●
Cabinet shelves	3 glass, edge-to-edge	3 (2 adj.) wire	3 (2 adj.) wire	3 (2 adj.) wire	3 (2 adj.) wire
Storage basket(s)	2	1 slide-out	1 slide-out	1 slide-out	1 slide-out
Door bins	1	4 (2 adj.)	4 (2 adj.)	4 (2 adj.)	4 (2 adj.)
Interior light	●	●	LED	●	LED
EXTERIOR					
Color(s) available*	FS/ES	FS/WW, BB	FS/ES/WW, CC, BB	FS/WW, BB	FS/ES/WW, CC, BB
Handle color	Stainless Stainless	Stainless with chrome Color-matched	Stainless with chrome Stainless with chrome Color-matched	Stainless Color-matched	Stainless Stainless Color-matched
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Door design	Contoured/Smooth	Contoured High-gloss contoured	Contoured Contoured High-gloss contoured	Contoured High-gloss contoured	Contoured Contoured High-gloss contoured
Textured steel case	Dark gray (premium finishes), color-matched (color models)	Case only (dark gray) Case only (color-matched)	Case only (dark gray) Case only (color-matched)	Case only (dark gray) Case only (color-matched)	Case only (dark gray) Case only (color-matched)
Adjustable rollers	2-point adjustable	Front	Front	Front	Front
WEIGHTS & DIMENSIONS					
Height to top of hinge (in.) A	70-1/8	69-1/2	69-1/2	69-1/2	69-1/2
Height to top of case (in.) B	69	69	69	69-1/2	69-1/2
Case depth without door (in.) C†	28-1/2	28-1/2	28-1/2	28-1/2	28-1/2
Case depth less door handle (in.) D†	32-3/4	32-3/4	32-3/4	32-3/4	32-3/4
Case depth with door handle (in.) E†	34-3/4	35-1/4	35-1/4	35-1/4	35-1/4
Depth w/fresh-food door open 90° (in.) F†	50-1/2	50-1/2	50-1/2	50-1/2	50-1/2
Width (in.) G	36	35-3/4	35-3/4	32-3/4	32-3/4
Width w/door open 90° with door handle (in.) H	42-1/4	43-1/2	43-1/2	38-1/4	38-1/4
Each side (in.)	1/8	1/8	1/8	1/8	1/8
Top (in.)	1	1	1	1	1
Air clearances Back (in.)	2	2	2	2	2
Approx. shipping wt. (lbs.)	320	340	340	344	344
Power/Ratings	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, FS = Fingerprint Resistant Stainless, ES = Slate, DS = Black Slate, WW = White, CC = Bisque, BB = Black.  
†Water hookup fits in back air clearance when calculating installation depth. If installed against a wall, allow clearance of 10-3/4" on 23 cu. ft. models; 14-1/4" on 25 cu. ft. models on freezer side to remove bin. Clearances required to remove fresh-food full-size pan without disassembling: 15" on 23 cu. ft.; and 19" on 25 cu. ft. Allow additional space for any necessary leveling adjustments.  
ALL MODELS AVAILABLE IN U.S. AND CANADA.

SIDE-BY-SIDE REFRIGERATORS  
DIMENSIONS

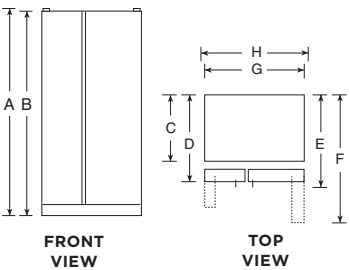

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

SEE PAGE 303 FOR WATER OUTLET INSTALLATION.




TOP-FREEZER REFRIGERATORS

	GE			
	GTE16DNTR GTE16DNTL	GTS16DTNR	GPE17CTNR	GTS17DTNR
ENERGY STAR® certified	●		●	
#1 in quality & dependability†	●	●	●	●
UFAS/ADA compliant	●	●	●	●
CAPACITY				
Total (cu. ft.)	16.6	15.6	16.6	16.6
Fresh food (cu. ft.)	12.6	11.58	12.6	12.6
Freezer (cu. ft.)	4.04	4.04	4.04	4.04
FRESH-FOOD FEATURES				
Upfront temperature controls	●		●	●
Cabinet shelves	2 wire (adj), 1 glass (fixed)	2 wire (adj), 1 glass (fixed)	2 wire (adj), 1 glass (fixed)	2 wire (adj), 1 glass (fixed)
Drawers	2 clear	2 clear	2 clear	2 clear
Door shelves	2 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)
Dairy compartment	●	●	●	●
Interior lighting	LED	LED	LED	LED
Never Clean condenser	●	●	●	●
FREEZER FEATURES				
Icemaker	Opt. (IM4D)	Opt. (IM4D)	Opt. (IM4D)	Opt. (IM4D)
Spillproof freezer floor	●	●	●	●
Freezer compartment shelves	1 full-width wire	1 full-width wire	1 full-width wire	1 full-width wire
Fixed door shelves	2 full-width	2 full-width	2 full-width	2 full-width
EXTERIOR				
Color(s) available*	WW, CC WW	WW	WW	WW/BB
Handle color	Smooth color-matched	Smooth color-matched	Smooth color-matched recessed	Smooth color-matched
Handle design	Designer-style	Designer-style	Side pocket	Designer-style
Field-installed handles	●	●	●	●
Door design	Textured	Textured	Textured	Textured
Textured steel case	Color-matched	Color-matched	Color-matched	Color-matched
Reversible doors	●	●	●	●
WEIGHTS & DIMENSIONS				
Height to top of hinge (in.) A	61-3/4	61-3/4	64-3/4	64-3/4
Height to top of case (in.) B	61-1/4	61-1/4	64-1/4	64-1/4
Case depth without door (in.) C	26-3/4	26-3/4	26-3/4	26-3/4
Case depth less door handle (in.) D	30-1/2	30-1/2	30-1/2	30-1/2
Case depth with door handle (in.) E	32-5/8	32-5/8	30-1/2	32-5/8
Depth w/fresh-food door open 90° (in.) F	57	57	57	57
Width (in.) G	28	28	28	28
Width w/door open 90° with door handle (in.) H	30-5/8	30-5/8	28-1/2	30-5/8
Each side (in.)	3/4	3/4	3/4	3/4
Top (in.)	1	1	1	1
Air clearances Back (in.)	1	1	1	1
Approx. shipping wt. (lbs.)	165	165	171	171
Power/Ratings	115V, 60Hz, 15Amps	115V, 60Hz, 15Amps	115V, 60Hz, 15Amps	115V, 60Hz, 15Amps

\*Color(s) available: WW = White, CC = Bisque, BB = Black.  
\*\*Available in left-hand door swing on white model only.  
†Among 14-18 cu. ft. refrigerators based on an independent study of property management personnel. Source: The Stevenson, Company, 2016.

TOP-FREEZER REFRIGERATORS  
DIMENSIONS




Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

	GE							
	GTE17DTNR	GTS17GSNR GTS17GTNR	GTE17GSNR GTE17GNTR	GIE17GSNR	GTS18DTNR	GTE18DCNR GTE18DTNR	GIE18DTNR	GTS18GSNR GTS18GTNR
ENERGY STAR certified	●		●	●		●	●	
#1 in quality & dependability†	●	●	●	●	●	●	●	●
UFAS/ADA compliant	●	●	●	●				
CAPACITY								
Total (cu. ft.)	16.6	16.6	16.6	16.6	17.5	17.5	17.5	17.5
Fresh food (cu. ft.)	12.6	12.6	12.6	12.6	13.49	13.9	13.49	13.49
Freezer (cu. ft.)	4.04	4.04	4.04	4.04	4.04	4.04	4.04	4.04
FRESH-FOOD FEATURES								
Upfront temperature controls	●	●	●	●	●	●	●	●
Autofill pitcher								
Cabinet shelves	2 wire (adj.), 1 glass (fixed)	2 glass (adj.), 1 glass (fixed)	2 glass (adj.), 1 glass (fixed)	2 glass (adj.), 1 glass (fixed)	2 wire (adj.), 1 glass (fixed)	2 wire (adj.), 1 glass (fixed)	2 wire	2 wire (adj.), 1 glass (fixed)
Drawers	2 clear	2 clear	2 clear	2 clear	2 clear	2 clear	2 clear	2 clear
Deli bin	1 sliding	1 sliding	1 sliding	1 sliding	3 full-width (2 with gallon storage)	3 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)	1 Snack 3 full-width (2 with gallon storage)
Door shelves	2 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)	2 full-width (2 with gallon storage)				
Dairy compartment	●	●	●	●	●	●	●	●
Interior lighting	LED	LED	LED	LED	LED	LED	LED	LED
Never Clean condenser	●	●	●	●	●	●	●	●
FREEZER FEATURES								
Icemaker	Opt. (IM4D)	Opt. (IM4D)	Opt. (IM4D)	Factory-installed	Opt. (IM4D)	Opt. (IM4D)	Factory-installed	Opt. (IM4D)
Spillproof freezer floor	●	●	●	●	●	●	●	●
Freezer compartment shelves	1 full-width wire	1 full-width wire	1 full-width wire	1 full-width wire	1 full-width wire	1 full-width wire	1 full-width wire	1 full-width wire
Fixed door shelves	2 full-width	2 full-width	2 full-width	2 full-width	2 full-width	2 full-width	2 full-width	2 full-width
EXTERIOR								
Color(s) available*	WW, CC, BB	SS/WW	SS, WW/BB	SS	WW, BB	SA, WW/BB	WW, BB	SS, WW/BB
Handle color	Smooth color-matched	Smooth color-matched	Smooth color-matched	Stainless	Smooth color-matched	Smooth color-matched	Smooth color-matched	Smooth color-matched
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Field-installed handles	●	●	●	●	●	●	●	●
Door design	Textured	Textured	Textured	Textured	Textured	Textured	Textured	Textured
Textured steel case	Color-matched	Color-matched	Dark gray (premium finishes), color-matched (color models)	Case only (dark gray)	Color-matched	Dark gray (premium finishes), color-matched (color models)	Color-matched	Dark gray (premium finishes), color-matched (color models)
Reversible doors	●	●	●	●	●	●	●	●
WEIGHTS & DIMENSIONS								
Height to top of hinge (in.) A	64-3/4	64-3/4	64-3/4	64-3/4	67-3/8	67-3/8	67-3/8	67-3/8
Height to top of case (in.) B	64-1/4	64-1/4	64-1/4	64-1/3	66-7/8	66-7/8	65-7/8	66-7/8
Case depth without door (in.) C	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4
Case depth less door handle (in.) D	30-1/2	30-1/2	30-1/2	30-1/2	30-1/2	30-1/2	30-1/2	30-1/2
Case depth with door handle (in.) E	32-5/8	32-5/8	32-5/8	32-5/8	32-5/8	32-5/8	32-5/8	32-1/2
Depth w/fresh-food door open 90° (in.) F	57	57	57	57	57	57	60-1/2	57
Width (in.) G	28	28	28	28	28	28	29-3/4	28
Width w/door open 90° w/door handle (in.) H	30-5/8	30-5/8	30-5/8	30-5/8	30-5/8	30-5/8	30-5/8	30-5/8
Each side (in.)	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Top (in.)	1	1	1	1	1	1	1	1
Air clearances Back (in.)	1	1	1	1	2	2	2	2
Approx. shipping wt. (lbs.)	172	172	175	177	179	179	181	192
Power/Ratings	115V, 60Hz, 15Amps							

\*Color(s) available: SS = Stainless, WW = White, CC = Bisque, SA = Silver, BB = Black.  
†Among 14-18 cu. ft. refrigerators based on an independent study of property management personnel. Source: The Stevenson, Company, 2016.

TOP-FREEZER REFRIGERATORS  
DIMENSIONS




Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

TOP-FREEZER REFRIGERATORS

	GE					
	GTE18GSNR GTE18GMNR GTE18GTNR	GIE18GSNR GIE18GCNR GIE18GTNR	GTS18HYN GTS18HMN GTS18HGN	GTE19DTNR	GIE19JSNR	GTS19KYN GTS19KMNR GTS19KGNR
ENERGY STAR® certified	●	●		●	●	
#1 in quality & dependability†	●	●	●			
UFAS/ADA compliant				●	●	
CAPACITY						
Total (cu. ft.)	17.5	17.5	17.5	19.2	19.2	19.2
Fresh food (cu. ft.)	13.49	13.49	13.49	13.5	13.59	13.59
Freezer (cu. ft.)	4.04	4.04	4.04	5.6	5.57	5.57
FRESH-FOOD FEATURES						
Upfront temperature controls	●	●	●	●	●	●
Cabinet shelves	2 glass (adj.), 1 glass (fixed)	2 glass (adj.), 1 glass (fixed)	2 glass (adj.), 1 glass (fixed)	2 wire, 1 glass	2 glass (adj.), 1 glass (fixed)	2 glass (adj.), 1 glass (fixed)
Adjustable	2 full-width	2 full-width	2 full-width	2 adj.	2 full-width	2 full-width
Drawers	2 clear	2 clear	2 clear	2 clear	2 clear	2 clear
Deli bin	1 sliding	1 sliding	1 sliding		1 sliding	1 sliding
	3 full-width (2 with gallon storage)	3 full-width (2 with gallon storage)	3 full-width (2 with gallon storage)	2 half-width (adj. gallon storage)	2 full-width (1 with gallon storage)	2 full-width (1 with gallon storage)
Door shelves						
Dairy compartment	●	●	●	●	●	●
Interior lighting	LED	LED	LED	LED	LED	LED
Never Clean condenser	●	●	●	●	●	●
FREEZER FEATURES						
Icemaker	Opt. (IM4D)	Factory-installed	Opt. (IM4D)	Opt. (IM4D)	Factory-installed	Opt. (IM4D)
Spillproof freezer floor	●	●	●	●	●	●
Freezer compartment shelves	1 full-width wire	1 full-width wire	full-width glass	1 adjustable wire	1 full-width wire	1 full-width glass
Fixed door bins					2 adj.	2 adj.
Fixed door shelves	2 full-width	2 full-width	2 fixed	2 fixed	2 full-width	2 full-width
EXTERIOR						
Color(s) available*	SS/ES/WW/CC/BB	SS/SA/WW/BB	FS, ES, WW/BB	WW/BB	SS	FS/ES/WW/BB
Handle color	Smooth color-matched	Smooth color-matched	Smooth color-matched	Smooth color-matched	Smooth color-matched	Smooth color-matched
Handle design	Designer-style	Designer-style	Designer-style		Designer-style	Designer-style
Field-installed handles	●	●	●		●	●
Door design	Textured  Dark gray (premium finishes), color-matched (color models)	Textured  Dark gray (premium finishes), color-matched (color models)	Smoth  Dark gray (premium finishes), color-matched (color models)	Textured	Textured	Smooth  Dark gray (premium finishes), color-matched (color models)
Textured steel case				Color-matched	Case only (dark gray)	
Reversible doors	●	●		●	●	●
WEIGHTS & DIMENSIONS						
Height to top of hinge (in.) A	67-3/8	67-3/8	67-3/8	66 3/8	66-3/8	66-3/8
Height to top of case (in.) B	66-7/8	66-7/8	66-7/8	65-7/8	65-7/8	65-7/8
Case depth without door (in.) C	26-3/4	26-3/4	26-3/4	28 5/8	28-5/8	28-5/8
Case depth less door handle (in.) D	30-1/2	30-1/2	30-1/2	32-5/8	32-3/8	32-3/8
Case depth with door handle (in.) E	32-5/8	32-5/8	32-5/8	34 1/2	34-1/2	34-1/2
Depth with fresh-food door open 90° (in.) F	57	57	57	60-1/2	60-1/2	60-1/2
Width (in.) G	28	28	28	29-3/4	29-3/4	29-3/4
Width with door open 90° with door handle (in.) H	30-5/8	30-5/8	30-5/8	29-6/7	32-3/8	32-3/8
Each side (in.)	3/4	3/4	3/4	1/8	1/8	1/8
Top (in.)	1	1	1	1	1	1
clearances Back (in.)	2	2	2	2	2	2
Approx. shipping wt. (lbs.)	192	192	208	197	239	192
Power/Ratings	115V, 60Hz, 15Amps	115V, 60Hz, 15Amps	115V, 60Hz, 15Amps	115V, 60Hz, 15Amps	115V, 60Hz, 15Amps	115V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, FS=Fingerprint Resistant Stainless ES = Slate, SA=Silver, WW = White, CC = Bisque, BB = Black.  
†Among 14-18 cu. ft. refrigerators based on an independent study of property management personnel. Source: The Stevenson, Company, 2016.

TOP-FREEZER REFRIGERATORS DIMENSIONS



**Note: All top-freezer, no-frost, right-hand refrigerator doors:** As you face the front of the refrigerator, the handle is on your left and the hinges are on your right.  
**All top-freezer, no-frost, left-hand refrigerator doors:** As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.




Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

TOP-FREEZER REFRIGERATORS

	GE			
	GTE21GSH GTE21GTH	GIE22JSNR GIE22JTNR	GIE21GSH GIE21GTH	GTS22KGNR GTS22KMNR GTS22KYN
ENERGY STAR® certified	●	●	●	
UFAS/ADA compliant	●	●	●	
CAPACITY				
Total (cu. ft.)	21.1	21.9	21.1	21.9
Fresh food (cu. ft.)	15.1	15.25	15.1	15.25
Freezer (cu. ft.)	6.04	6.68	6.04	6.68
FRESH-FOOD FEATURES				
Upfront temperature controls	●	●	●	●
Cabinet shelves	2 glass	2 glass (adj.), 1 glass (fixed)	2 glass	2 glass (adj.), 1 glass (fixed)
Adjustable	2 full-width		2 full-width	
Spillproof	Resistant		Resistant	
Drawers	2 adj.-humidity	2 clear	2 adj.-humidity	2 clear
Deli bin		1 sliding		1 sliding
Snack drawer	Clear		Clear	
	3 fixed (2 with gallon storage)	2 full-width (1 with gallon stor- age)	3 fixed (2 with gallon storage)	2 full-width (1 with gallon stor- age)
Door shelves	●	●	●	●
Dairy compartment	●	●	●	●
Interior lighting	●	LED	●	LED
Never Clean condenser	●	●	●	●
FREEZER FEATURES				
Icemaker	Opt. (IM4D)	Factory-installed	Factory-installed	Opt. (IM4D)
Spillproof freezer floor	●	●	●	●
Freezer compartment shelves	1 full-width wire	1 full-width wire	1 full-width wire	1 full-width glass
Fixed door shelves/bins	2 full-width	2 full-width	2 full-width	2 full-width
EXTERIOR				
Color(s) available*	SS WW, CC, BB	SS WW, BB	SS, WW, BB	WW, BB ES, DS FS
Handle color	Stainless with chrome	Smooth color-matched	Color-matched	Smooth color-matched
Handle design	Designer-style	Designer-style	Designer-style	Designer-style
Field-installed handles	●	●	●	●
Door design	Textured  Dark gray (premium finishes), color-matched (color models)	Textured  Dark gray (premium finishes)	Textured  Dark gray (premium finishes), color-matched (color models)	Smooth  Dark gray (premium finishes), color-matched (color models)
Textured steel case				
Reversible doors	●	●	●	●
WEIGHTS & DIMENSIONS				
Height to top of hinge (in.) A	66-3/4	66-3/8	66-3/4	66-3/8
Height to top of case (in.) B	66-1/4	65-7/8	66-1/4	65-7/8
Case depth without door (in.) C	29	28-5/8	29	25-5/8
Case depth less door handle (in.) D	32-1/4	32-3/8	32-1/4	32-3/8
Case depth with door handle (in.) E	34	34-1/2	34	34-1/2
Depth w/fresh-food door open 90° (in.) F	62-3/4	63-1/2	62-3/4	63-1/2
Width (in.) G	32-7/8	32-3/4	32-7/8	32-3/4
Width w/door open 90° with door handle (in.) H	35-1/2	35-3/8	35-1/2	35-3/8
Each side (in.)	1/8	1/8	1/8	1/8
Top (in.)	1/8	1	1/8	1
clearances Back (in.)	1	2	1	2
Approx. shipping wt. (lbs.)	238	238	238	227
Power/Ratings	120V, 60Hz, 15Amps	115V, 60Hz, 15Amps	120V, 60Hz, 15Amps	115V, 60Hz, 15Amps

\*Color(s) available: SS = Stainless, FS=Fingerprint Resistant Stainless, ES = Slate, DS=Black Slate, WW = White, CC = Bisque, BB = Black.  
†Among 14-18 cu. ft. refrigerators based on an independent study of property management personnel. Source: The Stevenson, Company, 2016.


TOP-FREEZER REFRIGERATORS DIMENSIONS



Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

	GE
	GPE12FSK GPE12FGK
ENERGY STAR certified	●
ADA compliant	●
CAPACITY	
Total (cu. ft.)	11.6
Fresh-food (cu. ft.)	8.48
Freezer (cu. ft.)	3.14
FRESH-FOOD FEATURES	
Upfront temperature controls	Electronic
Cabinet shelves	2 spillproof glass
Spill-resistant	●
Drawers	2 clear
	3 full-width (2 with gallon storage)
Door shelves	
Interior lighting	LED
Never Clean condenser	●
FREEZER FEATURES	
Factory-installed icemaker and bin	Opt. (IM4D)
Wire freezer compartment shelves	Step
Fixed door shelves	2 clear full-width
EXTERIOR	
Color(s) available*	SB WW, BB
Handle color	Black
Handle design	Color-matched
Exterior design	Recessed
Smooth steel door and case	Rounded doors
Reversible doors	●
WEIGHTS & DIMENSIONS	
Height to top of hinge (in.) A	59-7/8
Height to top of case (in.) B	59-3/8
Case depth without door (in.) C	25-5/8
Case depth less door handle (in.) D	28-5/8
Case depth with door handle (in.) E	28-5/8
Depth w/fresh food door open 90° (in.) F	50-5/8
Width (in.) G	24
Width w/door open 90° w/door handle (in.) H	25-1/8
Air clearances Each side (in.)	1
Top (in.)	4
Back (in.)	3
Approx. shipping wt. (lbs.)	151
Power/Ratings	120V, 60Hz, 15Amps

TOP-FREEZER REFRIGERATOR DIMENSIONS

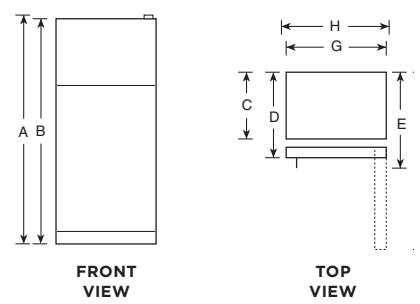




GE WINE AND BEVERAGE CENTERS

	WINE CENTERS		BEVERAGE CENTERS	
	PWS06DSP	GWS04HAE	PVS06BSP	GVS04BQN
CAPACITY				
Total (cu. ft.)	4.8	4.1	5.1	4.1
Can capacity			155	125
Bottle capacity	44	30	52	31
FRESH-FOOD FEATURES				
Temperature controls	Dual Zone: Upper: 43–61°F, Lower: 44–62°F	Electronic with actual-temp. (45°–61°F)	Adjustable 38–61°F	Electronic with actual-temp. (41°–61°F)
Glass door	Glass door with stainless trim	Tinted w/stainless trim	Glass door with stainless trim	Tinted w/stainless trim
Door design	Contoured	Flat	Contoured	Flat
Shelves	6 wood extension shelves	4 full-depth removable, 1 half-depth	4 wood and glass reversible	3 full-depth removable, 2 half-depth
Wine racks	6 sliding wine racks	5	4	5 wood
Full-extension	3/4 extension			
Reversible shelves			●	
Interior lighting	Display (on) / Door (on/off)	●	Display (on) / Door (on/off)	●
Lock		●		●
Door alarm	●		●	
EXTERIOR				
Color(s) available	Black case with Fingerprint Resistant Stainless trim	Black case and stainless trim	Black case with Fingerprint Resistant Stainless trim	Black case and stainless trim
Door handle	Stainless	Stainless	Stainless	Stainless
Built-in capability	●	●	●	●
Free-standing capability	●	●	●	●
Cabinet liner color	Black	Black	Black	Black
Reversible door				
WEIGHTS & DIMENSIONS				
Height (in.) A	33-3/4	33	33-3/4	33
Width (in.) B	23-1/2	19	23-1/2	19
Depth with handle (in.) C	24-5/8	22-1/2	24-5/8	22-1/2
Depth with door open 90° (in.) D	45-1/4	38-5/8	45-1/4	38-5/8
Each side (in.)	0	0	0	0
Back (in.)	0	0	0	0
Air clearances Top (in.)	0	0	0	0
Approx. shipping wt. (lbs.)	125	77	125	77

WINE AND BEVERAGE CENTERS  
DIMENSIONS




COMPACT REFRIGERATORS

	GE		
	GCE06GSH GCE06GGH	GME04GLK GME04GGK	GDE03GLK GDE03GGK
ENERGY STAR® certified	●	●	●
CAPACITY			
Total (cu. ft.)	5.6	4.4	3.1
Fresh food (cu. ft.)	5.12	3.93	2.12
Freezer (cu. ft.)	.49**	.47**	.93**
FEATURES			
Ice trays	2 mini	1 mini	1 mini
Defrost	Manual	Manual	Partial automatic
Crisper drawer	●		●
Cabinet shelves	2 glass	3 glass	2 glass
Can rack	●	●	●
Door shelves	1 full-width, 2 half-width	1 full-width, 2 half-width	2 half-width
Separate true freezer			●
Interior light	●		●
ECONOMICAL/QUIET			
Cabinet/door insulation	Foam	Foam	Foam
EXTERIOR			
Color(s) available*	SB WW, BB	LB WW, BB	LB WW, BB
Door handle	Black recessed Color-matched recessed	Black recessed Color-matched recessed	Black recessed Color-matched recessed
Rounded door		●	●
Reversible door	●	●	●
WEIGHTS & DIMENSIONS			
Height (in.) A	34-1/8	33-7/8	33-3/8
Width (in.) B	23-5/8	19-3/4	18-3/4
Depth with handle (in.) C	23-3/4	21-1/4	20-1/8
Depth with door open 90° (in.) D	46	39-1/8	37
Air clearances Top (in.)	0†	1/2	1/2
Each side (in.)	0	2	2
Back (in.)	0	2	2
Approx. shipping wt. (lbs.)	85	65	63
Voltage rating	120V	120V	120V

\*Color(s) available: SB = Stainless, LB = CleanSteel™, WW = White, BB = Black.  
\*\*Compartment for short-term storage of frozen food. The frozen food compartment of this refrigerator will make ice, and pre-frozen foods can be stored for about two weeks. It will not effectively freeze fresh foods or provide long-term storage for meats, poultry, or fish.  
†If installed against a wall, allow 1-1/4" on hinge side to allow for proper door opening.

COMPACT REFRIGERATORS  
DIMENSIONS

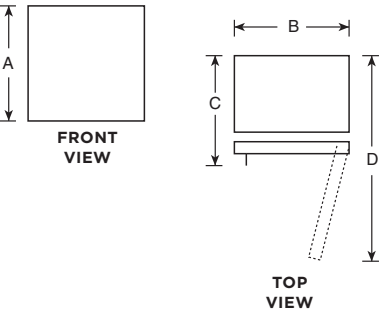

ICE MAKERS


	GOURMET CLEAR ICE UCC15NJII	NUGGET ICE UNC15NJII
CAPACITY		
Daily ice production (lbs.)	Up to 48	Up to 56
Storage bin capacity (lbs.)	26	26
FEATURES		
Interior lighting	LED	LED
Clean light	Yes	Yes
Control type	Electronic LED	Electronic LED
Ice scoop	Yes	Yes
EXTERIOR		
Handle	Custom handle or Stainless door accessory kit required	Custom handle or Stainless door accessory kit required
Panel capability	3/4" custom panel or accessory door kit	3/4" custom panel or accessory door kit
Color appearance	Custom panel and handle or Stainless door accessory required	Custom panel and handle or Stainless door accessory required
Door swing	Reversible hinges	Reversible hinges
Installation	Built-in or freestanding Indoor or outdoor	Built-in or freestanding Indoor or outdoor
Leveling system	4 leveling legs	4 leveling legs
WEIGHTS & DIMENSIONS		
Width (in.)	14-7/8	14-7/8
Height (in.)	33-7/8	33-7/8
Depth (in.)	22-3/4	22-3/4
Depth excluding panel (in.)	22	22
Net weight (lbs.)	107	112
Approx. shipping weight (lbs.)	115	120
Power/Ratings	110V, 60Hz, 5A	110V, 60Hz, 5A
ACCESSORIES		
Optional Stainless panel with handle	PIP7OSS (Stainless panel with GE Profile™ handle)	PIP7OSS (Stainless panel with GE Profile handle)
Optional drain pump kit	UPK3	UPK3
Optional filter	GXRLQK	GXRLQK

UPRIGHT FREEZERS

	GE					
	Frost-free					
	FUF21DL	FUF21SM	FUF17DL	FUF17SM	FUF14DL	FUF14SM
ENERGY STAR certified	●		●		●	
CAPACITY						
Total volume (cu. ft.)	21.3	21.3	17.3	17.3	14.1	14.1
FEATURES						
Temperature control	Easy-set electronic	Easy-set electronic	Easy-set electronic	Easy-set electronic	Easy-set electronic	Easy-set electronic
Audible temperature alarm	●	●	●	●	●	●
Door ajar alarm	●	●	●	●	●	●
Door shelves (total)	4 clear	4 opaque	4 clear	4 opaque	4 clear	4 opaque
Interior lighting	LED	LED	LED	LED	LED	LED
Lock with self-ejecting key	●	●	●	●	●	●
Cabinet shelves (total)	4 glass (2 adj.)	4 wire (2 adj.)	4 glass (2 adj.)	4 wire (2 adj.)	4 glass (2 adj.)	4 wire (2 adj.)
Slide-out bulk storage basket	3 clear plastic	1 wire	3 clear plastic	1 wire	2 clear plastic	1 wire
Turbo Freeze system	●	●	●	●	●	●
Garage-ready*	●	●	●	●	●	●
ECONOMICAL/QUIET						
Magnetic door gasket	●	●	●	●	●	●
Air tower	●	●	●	●	●	●
EXTERIOR						
Color available	White	White	White	White	White	White
Door handle	High-gloss	High-gloss	High-gloss	High-gloss	High-gloss	High-gloss
Textured steel case	●	●	●	●	●	●
Smooth steel door	●	●	●	●	●	●
WEIGHTS & DIMENSIONS						
Height (in.) A	76-5/8	76-5/8	64-7/8	64-7/8	62	62
Width (in.) B	32-7/8	32-7/8	32-7/8	32-7/8	28-3/8	28-3/8
Case depth without door (in.) C	26	26	26	26	26-7/8	26-7/8
Depth without door handle (in.) D	29	29	29	29	29-3/4	29-3/4
Depth with door handle (in.) E	31-1/4	31-1/4	32-7/8	32-7/8	32-1/8	32-1/8
Depth with door open (in.) 90° F	60	60	60	60	55-3/4	55-3/4
Each side (in.)	3	3	3	3	3	3
Air Top (in.)	3	3	3	3	3	3
clearances Back (in.)	3	3	3	3	3	3
Approx. shipping wt. (lbs.)	244	244	227	227	200	200

\*GE freezers are proven to perform at room temperature ranging between 0°F to 110°F.


UPRIGHT FREEZERS DIMENSIONS

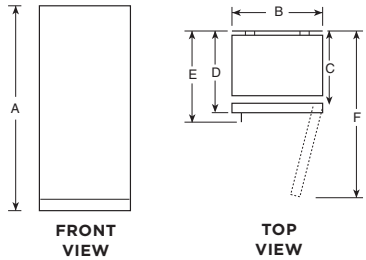

CHEST FREEZERS

	GE						
	FCM22DL	FCM16DL	FCM16SL	FCM11SR	FCM9SR	FCM7SK	FCM5SK
ENERGY STAR certified	●	●					
CAPACITY							
Total volume (cu. ft.)	21.7	15.7	15.7	8.8	10.7	7.0	5.0
FEATURES							
Manual defrost	●	●	●	●	●	●	●
Temperature control	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Audible temperature alarm	With light and reset button	With light and reset button		●			
Power “ON” light	●	●	●	●	●	●	●
Wraparound condenser	●	●	●	●	●	●	●
Wraparound evaporator	●	●	●	●	●	●	●
Upfront defrost water drain	●	●	●	●	●	●	●
Interior lighting	LED	LED	LED	LED	LED		
Lock with key	●	●	●	●			
Lift-out, sliding bulk storage basket(s)	5	4	2	2	2	2	1
Second-level rail	●	●					
Dividers	4 customizable						
Garage ready*	●	●	●	●	●	●	●
ECONOMICAL/QUIET							
Insulation (cabinet and lid)	●	●	●	●	●	●	●
Cabinet liner	Textured aluminum	Textured aluminum	Textured aluminum	Textured aluminum	Textured aluminum	Textured aluminum	Textured aluminum
EXTERIOR							
Color available	White	White	White	White	White	White	White
Handle	●	●	●	●	●	Recessed	Recessed
WEIGHTS & DIMENSIONS							
Height (in.) A	33-3/8	33-3/8	33-3/8	33-27/100	33-27/100	33-1/2	33-1/2
Width (in.) B	73-1/4	65	65	37	43-7/10	37-1/4	28-3/4
Depth (in.) C	33	28-1/2	28-1/2	24	24	21-1/4	21-1/4
Height with lid open (in.) D	64-1/4	60-5/8	60-5/8	56	56	53	53
Air Each side (in.)	2	2	2	2	2	3	3
clearances Back (in.)	2	2	2	2	2	3	3
Approx. shipping wt. (lbs.)	232	181	190	99	103	82	69

\*GE freezers are proven to perform at room temperature ranging between 0°F to 110°F.

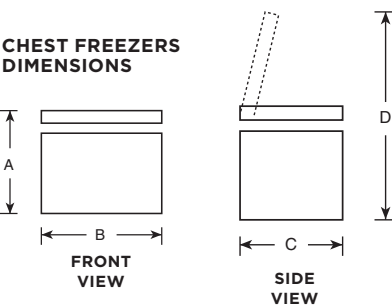




30" BUILT-IN DOUBLE OVENS

	GE PROFILE™			GE	
	PTD9000SN PTD9000BN	PTD7000SN PTD7000BN	PTD700LSN PTD700RSN	JTD5000SN JTD5000EN JTD5000DN	JTD3000SN JTD3000EN JTD3000DN
FEATURES & CONTROLS					
Total oven capacity (cu. ft.)	10	10	10	10	10
Oven cooking technology	Upper Lower	Convection Convection	Convection Convection	Convection Traditional	Traditional Traditional
Self-clean oven with Steam Clean option	●	●	●	●	●
Delay clean option	Variable	Variable	Variable	Variable	Variable
Automatic self-clean oven door lock	●	●	●	●	●
True European Convection	●	●	●	●	
Direct Air	●	●	●		
Convection Bake multi/single rack	●	●	●	Upper	
Convection Roast	●*	●*	●*	Upper	
Convection Broil	●*	Upper*	Upper*	Upper	
Convection Bake	●	●	●	Upper	
Thermal Bake	●	●	●	●	●
Thermal Broil	●	●	●	●	●
Precision Cooking	●*	Upper*	Upper*		
Voice control	●*	●*	●*	●	●
Dehydrate	●*	●*	●*		
No-preheat air fry	●*	Upper*	Upper*		
In-oven CookCam™	Upper*				
Ten-pass bake element		●	●	●	●
Ten-pass dual broil element	●				
Eight-pass broil element		●	●	●	●
Hidden bake oven interior	●				●
Control type	7" full-color LCD touch screen	7" full-color LCD touch screen	7" full-color LCD touch screen	Hidden backlit LCD	Glass touch
WiFi Connect	●*	●*	●*	●	●
Upgradeable feature downloads	●*	●*	●*		
Scan-to-Cook technology	●*	●*	●*	●	●
Auto Recipe Conversion	●	●	●	●	
Proof mode	●	●	●		●
Oven meat probe	●	●	●	Upper	
Warm mode	●	●	●		●
Temperature display	●	●	●	●	●
Delay bake option	●	●	●	●	●
°C and °F programmable	●	●	●	●	●
Audible preheat signal	●	●	●	●	●
Auto oven shut-off with override	●	●	●	●	●
Electronic clock and kitchen timer	●	●	●	●	●
Control lock capability	●	●	●	●	●
Halogen interior oven lighting	●	●	●	●	●
Certified Sabbath mode	●	●	●	●	●
Never-Scrub oven racks	●	●	●	●	●
Heavy-duty oven racks	4 roller racks 6 embossed (both ovens)	2, 2 roller racks (both ovens)	2, 2 roller racks (both ovens)	3, 1 roller rack (both ovens)	4 6 embossed (both ovens)
Rack positions					
APPEARANCE					
Color appearance**	SS TS	SS TS	SS SS	SS ES BB	SS ES WW
Handle color**	SS TS	SS TS	SS SS	SS ES BB	SS SS WW
Door swing			Left-swing Right-swing		
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Oven interior	Black gloss	Black gloss	Black gloss	Black gloss	Black gloss
WEIGHTS & DIMENSIONS					
Approx. shipping wt. (lbs.)	308	308	308	263	260
Oven cabinet width required (in.)	30	30	30	30	30
Overall dimensions, including handle (WxHxD in inches)	29-3/4 x 53 x 26-3/4	29-3/4 x 53 x 26-3/4	29-3/4 x 53 x 26-3/4	29-3/4 x 53 x 26-3/4	29-3/4 x 53 x 26-3/4
Overall oven interior dimensions (WxHxD in inches)	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4
POWER/RATINGS					
240V	9.0	9.0	9.0	8.4	8.4
KW rating @ 208V	6.8	6.8	6.8	6.3	6.3
240V	40	40	40	40	40
Amps @ 208V	40	40	40	40	40
Convection wattage	2,400	2,400	2,400	2,400	
Broiler wattage	3,300/1,000	3,300/1,000	3,300/1,000	4,000	4,000
Bake wattage	2,850	2,850	2,850	2,850	2,850


\*WiFi-enabled feature.  
\*\*SS = Stainless, TS = Black Stainless, ES = Slate, WW = White on white, BB = Black on black.




OVEN SUPPORT FOR 30" OVEN MODELS

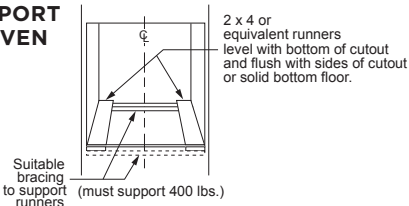


30" BUILT-IN DOUBLE OVEN DIMENSIONS (IN INCHES)  
MODELS PTD9000, PTD7000, JTD5000, JTD3000

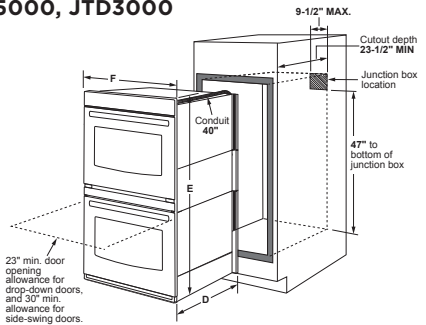

MODEL PTD700R

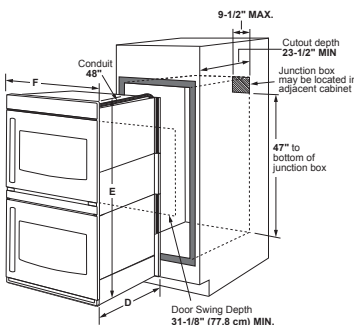

MODEL PTD700L

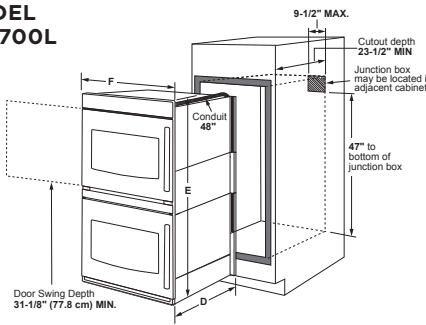

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Note:** If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

		PTD7000, JTD5000, JTD3000
<b>CABINET</b>		
A - Overlap of oven at top of cutout		1"
B - Overlap of oven other side of edge of cutout		3/4"
C - Overlap of oven at bottom of cutout		1-1/4"
<b>OVEN</b>		
D - Install depth		23-1/2"
E - Overall height with trim		53"
F - Overall width		29-3/4"

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

27" BUILT-IN DOUBLE OVENS



	GE PROFILE	GE	
	PKD7000SN	JKD5000SN JKD5000EN JKD5000DN	JKD3000SN JKD3000DN
FEATURES & CONTROLS			
Total oven capacity (cu. ft.)	8.6	8.6	8.6
Oven cooking technology	Upper Lower	Convection Traditional	Traditional Traditional
Self-clean oven with Steam Clean option	●	●	●
Delay clean option	Variable	Variable	Variable
Automatic self-clean oven door lock	●	●	●
True European Convection	●	●	
Convection Bake multi/single rack	Upper	Upper	
Convection Roast	Upper*	Upper	
Convection Broil	Upper*		
Convection Bake	Upper		
Thermal Bake	●	●	●
Thermal Broil	●	●	●
Ten-pass bake element	●	●	●
Eight-pass broil element	●	●	●
Hidden bake oven interior	●	●	●
Control type	7" full-color LCD touch screen	Hidden backlit LCD	Glass touch
WiFi Connect	●*		●
Upgradeable feature downloads	●*		
Scan-to-Cook technology	●*	●	●
Voice control	●*	●	●
Auto Recipe Conversion	●	●	
Proof mode	●	●	●
Oven meat probe	Upper	Upper	
Warm mode	●	●	●
Temperature display	●	●	●
Delay bake option	●	●	●
°C and °F programmable	●	●	●
Audible preheat signal	●	●	●
Auto oven shut-off with override	●	●	●
Electronic clock and kitchen timer	●	●	●
Control lock capability	●	●	●
Halogen interior oven lighting	●	●	●
Certified Sabbath mode	●	●	●
Never-Scrub oven racks	●	●	●
Heavy-duty oven racks	2, 2 roller racks 6 embossed (both ovens)	3, 1 roller rack 6 embossed (both ovens)	4 6 embossed (both ovens)
Rack positions			
APPEARANCE			
Color appearance**	SS	SS ES BB	SS WW
Handle color**	SS	SS ES BB	SS WW
Handle design	Designer-style	Designer-style	Designer-style
Oven interior	Black gloss	Black gloss	Black gloss
WEIGHTS & DIMENSIONS			
Approx. shipping wt. (lbs.)	241	241	229
Oven cabinet width required (in.)	27	27	27
Overall dimensions, including handle (WxHxD in inches)	26-3/4 x 51-1/8 x 26-5/8	26-3/4 x 51-1/8 x 26-5/8	26-3/4 x 51-1/8 x 26-5/8
Overall oven interior dimensions (WxHxD in inches)	21-1/2 x 17-1/4 x 20	21-1/2 x 17-1/4 x 20	21-1/2 x 17-1/4 x 20
POWER/RATINGS			
240V	7.2	7.2	7.2
KW rating @ 208V	5.4	5.4	5.4
240V	30	30	30
Amps @ 208V	30	30	30
Convection wattage	2,400	2,400	
Broiler wattage	3,400	3,400	3,400
Bake wattage	2,600	2,600	2,600

\*WiFi-enabled feature.  
\*\*SS = Stainless, ES = Slate, WW = White on white, BB = Black on black.

**Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.**

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

27" BUILT-IN DOUBLE OVEN DIMENSIONS (IN INCHES)  
MODELS PKD7000, JKD5000, JKD3000

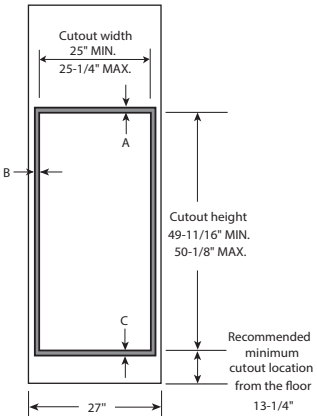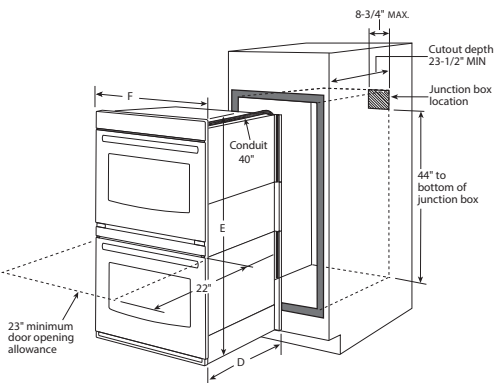


		PKD7000, JKD5000, JKD3000
<b>CABINET</b>		
A - Overlap of oven at top of cutout		1"
B - Overlap of oven other side of edge of cutout		1"
C - Overlap of oven at bottom of cutout		1"
<b>OVEN</b>		
D - Install depth		23-1/2"
E - Overall height with trim		51-1/8"
F - Overall width		26-3/4"

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Note:** If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

OVEN SUPPORT FOR 27" DOUBLE OVEN MODELS

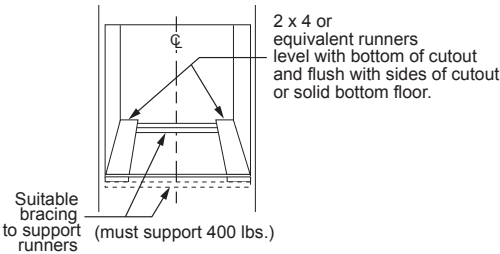


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

24" BUILT-IN DOUBLE OVEN


		GE
		JRP28SK JRP28BJ
FEATURES & CONTROLS		
Capacity (cu. ft.)		2.7/2.7
Oven	Upper	Traditional
	Lower	Traditional
Self-clean		Upper
Standard clean		Lower
Delay clean option		Variable (upper)
Thermal Bake		●
Thermal Broil		●
Variable broil/Four-pass broil		Upper
Control type		Electronic touch
Temperature display		Upper
Delay bake option		●
°C and °F programmable		●
Audible preheat signal		●
Auto oven shut-off with override		●
Electronic clock and kitchen timer		●
Control lock capability		●
Certified Sabbath mode		●
Oven light		●
Oven racks		2 upper/2 lower
Rack positions		4 upper/4 lower
APPEARANCE		
Color appearance*		SS BB
Frameless oven doors*		SS
Oven door with window		Black glass
		Big view
Handle color*		SS CM
Handle design		Designer-style
Oven interior		Black
WEIGHTS & DIMENSIONS		
Approx. shipping weight (lbs.)		176
Oven cabinet width required (in.)		24
Overall dimensions, including handle (WxHxD in inches)		23-3/4 x 48-5/8 x 23-1/8
Overall oven interior dimens.	Upper	17 x 15 x 18-1/2
(WxHxD in inches)	Lower	17 x 15 x 18-1/2
POWER/RATINGS		
KW rating @	240V	7.1
	208V	5.3
Amps @	240V	30
	208V	30
Broiler wattage		3,400
Bake wattage		2,600

\*SS = Stainless, BB = Black on black, CM = Color-matched.

24" BUILT-IN DOUBLE OVEN  
DIMENSIONS (IN INCHES)  
MODEL JRP28

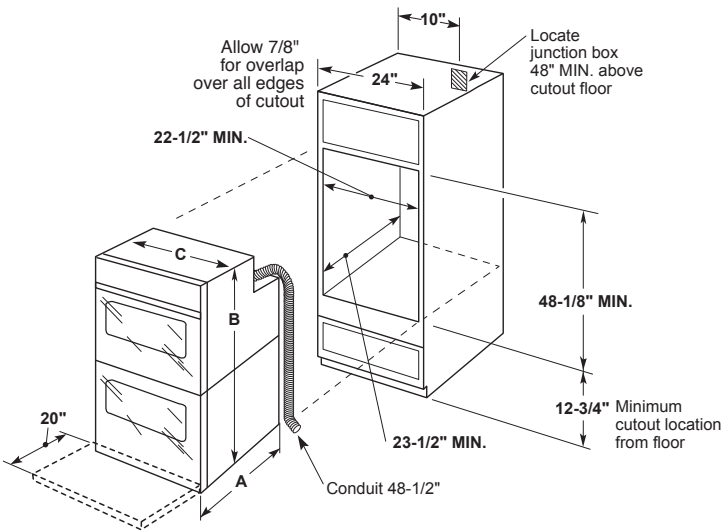

OVEN SUPPORT FOR 24" DOUBLE OVEN MODELS

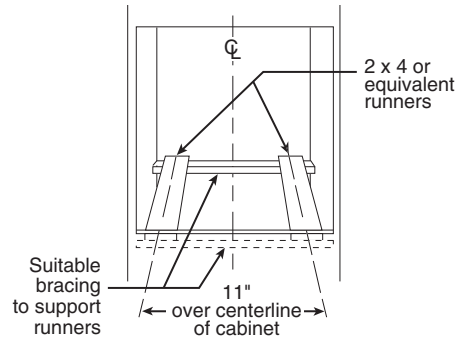

(Must support 275 lbs.)

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

30" BUILT-IN COMBINATION DOUBLE OVENS


FEATURES & CONTROLS	GE PROFILE™		GE
	PT9800SH	PT7800SH	JT3800SH
Capacity (cu. ft.)	1.7/5.0	1.7/5.0	1.7/5.0
Oven			
Upper	Advantium®	Convection Microwave	Microwave
Lower	Convection	Convection	Traditional
Self-clean oven with Steam Clean option	Lower	Lower	Lower
Delay clean option	Variable	Variable	Variable
Advantium oven	Upper		
Speedcook 120V	up to 4 times		
Convection oven	250°-450°		
Microwave oven	Upper		
Warming	Upper		
Proofing	Upper		
Microwave oven		Upper	Upper
Convection bake		●	
Microwave cooking timer		●	●
Microwave power levels		10	10
Sensor functions		Upper	Upper
Microwave oven power output watts		1,000	1,000
16" turntable	●	●	●
True European Convection	Lower	Lower	
Convection Bake multi/single rack	Lower	Lower	
Convection Roast	Lower	Lower	
Convection Broil	Lower		
Thermal Bake	Lower	Lower	Lower
Thermal Broil	Lower	Lower	Lower
Ten-pass bake element	Lower	Lower	Lower
Eight-pass broil element	Lower	Lower	Lower
Control type	Dial & Glass touch	Dial & Glass touch	Dial & Glass touch
Preprogrammed menu items	Lower	Lower	
Auto Recipe Conversion	Lower	Lower	Lower
Defrost mode	Lower	Lower	Lower
Proof mode	Lower	Lower	
Oven meat probe	Lower	Lower	
Warm mode	Lower	Lower	Lower
Temperature display	Lower	Lower	Lower
Delay bake option	Lower	Lower	Lower
°C and °F programmable	Lower	Lower	Lower
Audible preheat signal	Lower	Lower	Lower
Auto oven shut-off with override	Lower	Lower	Lower
Electronic clock and kitchen timer	Lower	Lower	Lower
Control lock capability	Lower	Lower	Lower
Certified Sabbath mode	Lower	Lower	Lower
Halogen interior oven light	Lower	Lower	Lower
Self-clean oven racks	Lower	Lower	Lower
Heavy-duty oven racks	2, 1 roller rack	2, 1 roller rack	3

Rack positions	6-ladder rack lower	6-ladder rack lower	6 lower
APPEARANCE			
Color appearance*	SS	SS	SS
Frameless oven doors*	SS	SS	SS
Oven door with window	Big view	Big view	Big view
Handle color*	SS	SS	SS
Handle design	Designer-style	Designer-style	Designer-style
Oven interior	Black	Black	Black
WEIGHTS & DIMENSIONS			
Approx. shipping weight (lbs.)	215	230	225
Oven cabinet width required (in.)	30	30	30
Overall dimensions, including handle (WxHxD in inches)	29-3/4 x 43-3/8 x 26-3/4	29-3/4 x 43-3/8 x 26-3/4	29-3/4 x 43-3/8 x 26-3/4
Overall oven interior dimensions (WxHxD in inches)	Upper: 20-1/16 x 8-1/2 x 17 Lower: 25 x 17-3/8 x 20-1/4	Upper: 20-1/16 x 8-1/2 x 17 Lower: 25 x 17-3/8 x 20-1/4	Upper: 20-1/16 x 8-1/2 x 17 Lower: 25 x 17-3/8 x 20-1/4
POWER/RATINGS			
KW rating @	240V: 7.6 208V: 5.7	240V: 7.2 208V: 5.4	240V: 7.2 208V: 5.4
Amps @	240V: 30 208V: 30	240V: 30 208V: 30	240V: 30 208V: 30
Convection wattage	2,400	2,400	
Microwave wattage	1,000	1,000	1,000
Broiler wattage	3,400	3,400	3,400
Bake wattage	2,850	2,850	2,850

\*SS = Stainless.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

30" BUILT-IN COMBINATION DOUBLE  
OVEN DIMENSIONS (IN INCHES)  
MODELS PT9800, PT7800, JT3800

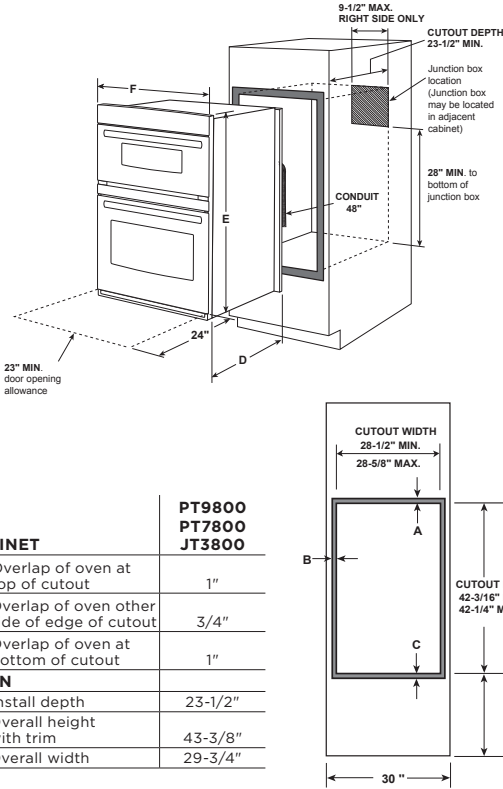


CABINET	PT9800 PT7800 JT3800
A - Overlap of oven at top of cutout	1"
B - Overlap of oven other side of edge of cutout	3/4"
C - Overlap of oven at bottom of cutout	1"
OVEN	
D - Install depth	23-1/2"
E - Overall height with trim	43-3/8"
F - Overall width	29-3/4"

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Note:** If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

OVEN SUPPORT FOR 30" COMBINATION  
DOUBLE OVEN MODELS



Most 30" wall cabinets can be used with this unit. The opening between the inside walls must be at least 28-1/2" wide.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

See page 294 for warranty information.

geappliances.com



27" BUILT-IN COMBINATION DOUBLE OVENS


	GE PROFILE™	GE
	PK7800SK	JK3800SH
FEATURES & CONTROLS		
Capacity (cu. ft.)	1.7/4.3	1.7/4.3
Oven		
Upper	Convection Microwave	Microwave
Lower	True European Convection	Traditional
Self-clean oven with Steam Clean option	Lower	Lower
Delay clean option	Lower	Variable
Microwave oven	Upper	Upper
Microwave cooking timer	●	●
Convection bake	Lower	
Microwave power levels	10	10
Sensor functions	Upper	Upper
Microwave oven power output watts	1,000	1,000
16" turntable	●	●
Convection Bake multi/single rack	Lower	
Thermal Bake	Lower	
Convection Roast	Lower	Lower
Thermal Broil	Lower	Lower
Ten-pass bake element	Lower	Lower
Eight-pass broil element	Lower	Lower
Control type	Dial & Glass touch	Dial & Glass touch
Auto Recipe Conversion	Lower	
Defrost mode	Lower	
Warm mode	Lower	Lower
Proof mode	Lower	
Temperature display	Lower	Lower
Delay bake option	Lower	Lower
°C and °F programmable	Lower	Lower
Audible preheat signal	Lower	Lower
Auto oven shut-off with override	Lower	Lower
Electronic clock and kitchen timer	Lower	Lower
Control lock capability	Lower	Lower
Certified Sabbath mode	Lower	Lower
Halogen interior oven light	Lower	Lower
Self-clean oven racks	Lower	Lower
Oven racks	2, 1 roller	3 heavy-duty
Rack positions	6-ladder rack lower	6 lower
APPEARANCE		
Color appearance*	SS	SS
Frameless oven doors*	SS	SS
Oven door with window	Big view	Big view
Handle color*	SS	SS
Handle design	Designer-style	Designer-style
Oven interior	Black	Black
WEIGHTS & DIMENSIONS		
Approx. shipping weight (lbs.)	192	192
Oven cabinet width required (in.)	27	27
Overall dimensions, including handle (WxHxD in inches)	26-3/4 x 42-3/8 x 26-7/8	26-3/4 x 42-3/8 x 26-7/8
Overall oven interior dimensions (WxHxD in inches)	Upper 20-1/16 x 8-1/2 x 17 Lower 21-1/2 x 17-1/4 x 20	20-1/16 x 8-1/2 x 17 21-1/2 x 17-1/4 x 20
POWER/RATINGS		
KW rating @		
240V	7.2	6.4
208V	5.4	5.6
Amps @		
240V	30	30
208V	30	30
Convection wattage	2,400	
Broiler wattage	3,400	3,400
Bake wattage	2,600	2,600
Microwave wattage	1,000	1,000

\*SS = Stainless.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

27" BUILT-IN COMBINATION DOUBLE OVEN DIMENSIONS (IN INCHES)  
MODELS PK7800, JK3800

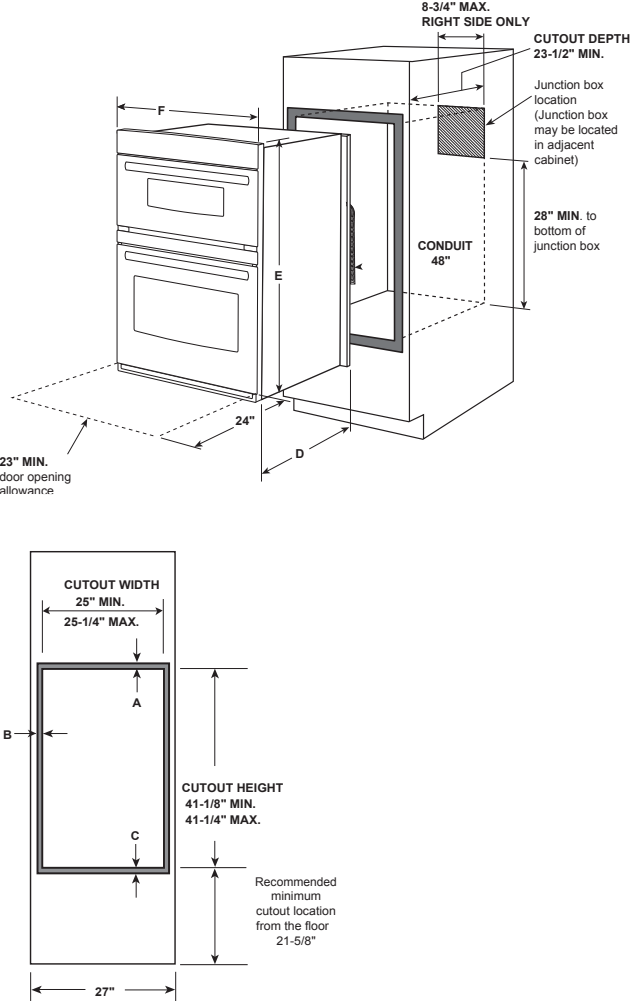


**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Note:** If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

OVEN SUPPORT FOR 27" COMBINATION DOUBLE OVEN MODELS

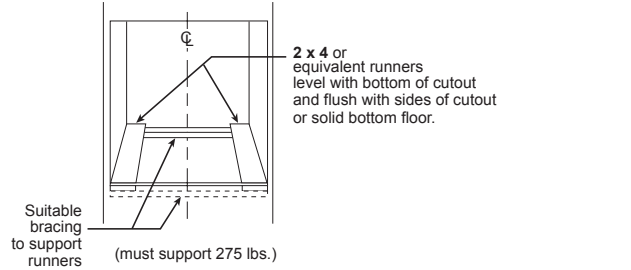

30" BUILT-IN SINGLE OVENS

	GE PROFILE			GE	
	PTS9000SN PTS9000BN	PTS7000SN PTS7000BN	PTS700LSN PTS700RSN	JTS5000SN JTS5000EN JTS5000DN	JTS3000SN JTS3000DN
UFAS/ADA compliant	●	●		●	●
FEATURES & CONTROLS					
Total oven capacity (cu. ft.)	5.0	5.0	5.0	5.0	5.0
Oven cooking technology	Convection	Convection	Convection	Convection	Traditional
Self-clean oven with Steam Clean option	●	●	●	●	●
Delay clean option	Variable	Variable	Variable	Variable	Variable
Automatic self-clean oven door lock	●	●	●	●	●
True European Convection	●	●	●	●	
Direct Air	●	●	●		
Convection Bake multi/single rack	●	●	●		
Convection Roast	●*	●*	●*	●	
Convection Broil	●*	●*	●*		
Convection Bake	●	●	●		
Thermal Bake	●	●	●	●	●
Thermal Broil	●	●	●	●	●
Precision Cooking	●*	●*	●*		
Voice control	●*	●*	●*	●	●
Dehydrate	●*	●	●		
No-preheat air fry	●*	●*	●*		
In-oven CookCam™	●*				
Ten-pass bake element	●	●	●	●	●
Ten-pass dual broil element	●	●	●		
Eight-pass broil element				●	●
Hidden bake oven interior	●	●	●	●	●
Control type	7" full-color LCD touch screen	7" full-color LCD touch screen	7" full-color LCD touch screen	Hidden backlit LCD	Glass touch
WiFi Connect	●*	●*	●*	●	●
Upgradeable feature downloads	●*	●*	●*		
Scan-to-Cook technology	●*	●*	●*	●	●
Auto Recipe Conversion	●	●	●	●	
Proof mode	●	●	●	●	●
Oven meat probe	●	●	●	●	
Warm mode	●	●	●	●	●
Temperature display	●	●	●	●	●
Delay bake option	●	●	●	●	●
°C and °F programmable	●	●	●	●	●
Audible preheat signal	●	●	●	●	●
Auto oven shut-off with override	●	●	●	●	●
Electronic clock and kitchen timer	●	●	●	●	●
Control lock capability	●	●	●	●	●
Halogen interior oven lighting	●	●	●	●	●
Certified Sabbath mode	●	●	●	●	●
Never-Scrub oven racks	●	●	●	●	●
Heavy-duty oven racks	2 roller rack	1, 1 roller rack	1, 1 roller rack	1, 1 roller rack	2
Rack positions	6 embossed	6 embossed	3 embossed	6 embossed	6 embossed
APPEARANCE					
Color appearance**	SS TS	SS TS	SS SS	SS ES BB	SS WW
Handle color**	SS TS	SS TS	SS SS	SS ES BB	SS WW
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Door swing			Left-swing Right-swing		
Oven interior	Black gloss	Black gloss	Black gloss	Black gloss	Black gloss
WEIGHTS & DIMENSIONS					
Approx. shipping wt. (lbs.)	177	151	177	151	136
Oven cabinet width required (in.)	30	30	30	30	30
Overall dimensions, including handle (WxHxD in inches)	29-3/4 x 28-3/8 x 26-3/4	29-3/4 x 28-5/8 x 26-3/4	29-3/4 x 28-5/8 x 26-3/4	29-3/4 x 28-5/8 x 26-3/4	29-3/4 x 28-5/8 x 26-3/4
Overall oven interior dimensions (WxHxD in inches)	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4	25 x 17-3/8 x 20-1/4
POWER/RATINGS					
240V	4.2	4.2	4.2	4.2	4.2
KW rating @					
208V	3.2	3.2	3.2	3.2	3.2
240V	20	20	20	20	20
Amps @					
208V	20	20	20	20	20
Convection wattage	2,400	2,400	2,400	2,400	
Broiler wattage	1,700/1,050	3,300/1,000	3,300/1,000	4,000	4,000
Bake wattage	2,850	2,850	2,850	2,850	2,850

\*WiFi-enabled feature.  
\*\*SS = Stainless, TS = Black Stainless, ES = Slate, WW = White on white, BB = Black on black.




Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Note: See following page for installation drawings.

30" BUILT-IN SINGLE OVENS

30" BUILT-IN SINGLE OVEN DIMENSIONS (IN INCHES)


MODELS PTS9000, PTS7000, JTS5000, JTS3000

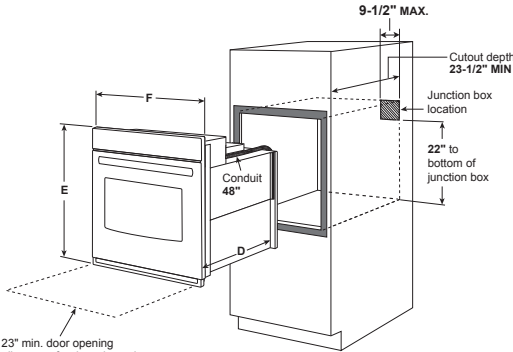

OVEN	PTS7000, JTS5000, JTS3000
D - Install depth	23-1/2"
E - Overall height with trim	28-5/8"
F - Overall width	29-3/4"

30" BUILT-IN TWIN FLEX OVEN DIMENSIONS (IN INCHES)

MODELS PT9200, PTS9200

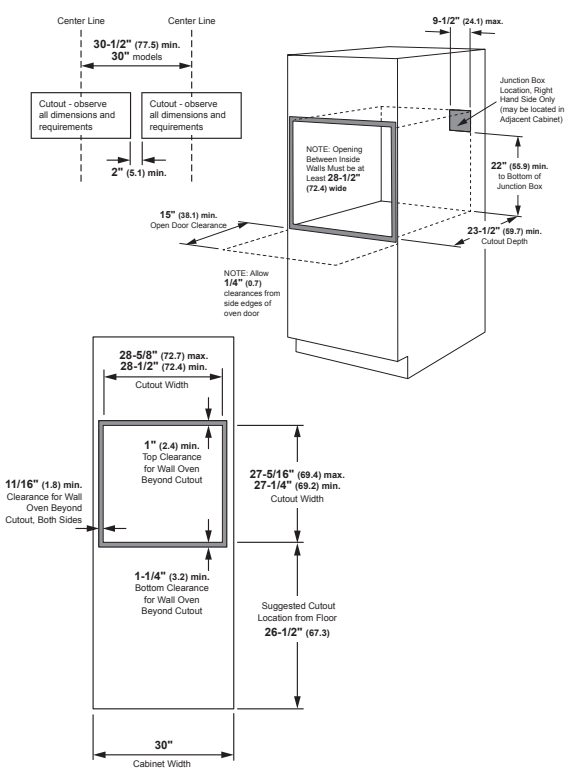

**Note:** Gas, electronic touch and electric coil cooktops cannot be installed over the PT9200 due to the top of the oven preventing the cooktop from fitting into place.

**Most 30" wall cabinets can be used with this unit.**


**Note:** These ovens are not approved for stackable installation.

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.


**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

MODEL PTS700L

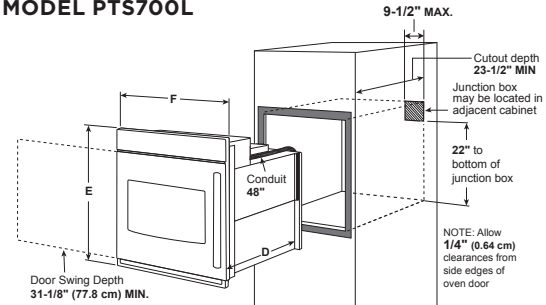

MODEL PTS700R

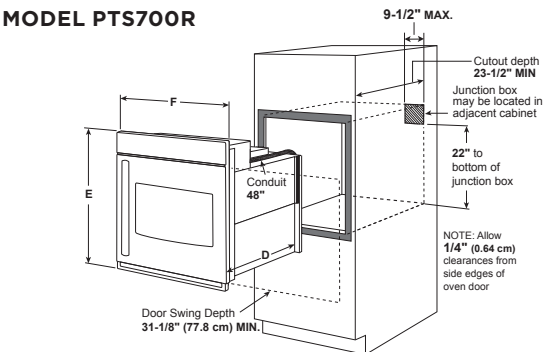



UNDERCOUNTER INSTALLATION DIMENSIONS (IN INCHES)

MODELS PTS7000, PTS9000, JTS5000, JTS3000

**Note:** 36" ribbon cooktops are approved for use over GE 30" single wall ovens and warming drawers. 30" ribbon cooktops are approved for use over GE 30" and GE 27" single wall ovens and warming drawers. Refer to cooktop and wall oven installation information packed with products for current dimensional data.

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data and for alternate installation options.

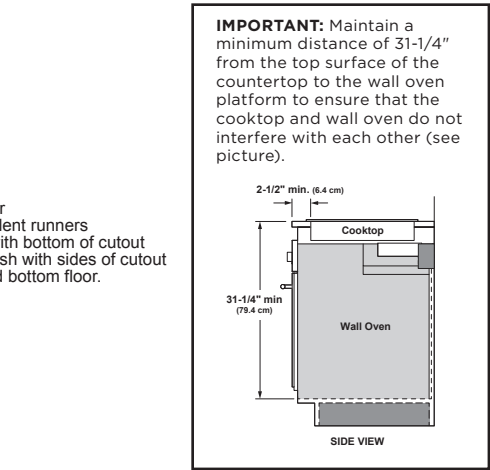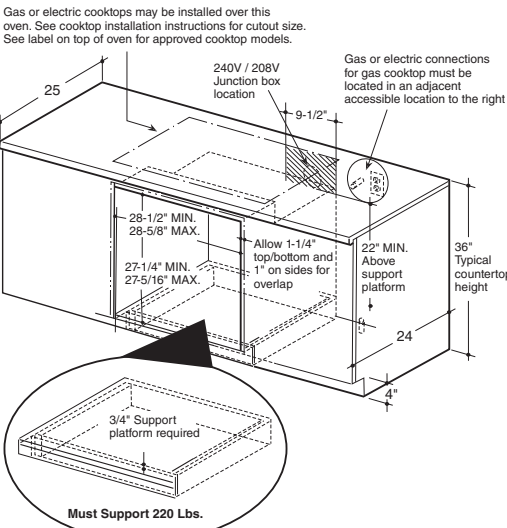

27" BUILT-IN SINGLE OVENS


	GE PROFILE™	GE	
	PKS7000SN	JKS5000SN JKS5000EN JKS5000DN	JKS3000SN JKS3000DN
UFAS/ADA compliant	●	●	●
<b>FEATURES &amp; CONTROLS</b>			
Total oven capacity (cu. ft.)	4.3	4.3	4.3
Oven cooking technology	Convection	Convection	Traditional
Self-clean oven with Steam Clean option	●	●	●
Delay clean option	Variable	Variable	Variable
Automatic self-clean oven door lock	●	●	●
True European Convection	●	●	●
Convection Bake multi/single rack	●	●	●
Convection Roast	●*	●	●
Convection Broil	●*	●	●
Convection Bake	●	●	●
Thermal Bake	●	●	●
Thermal Broil	●	●	●
Ten-pass bake element	●	●	●
Eight-pass broil element	●	●	●
Hidden bake oven interior	●	●	●
Control type	7" full-color LCD touch screen	Hidden backlit LCD	Glass touch
WiFi Connect	●*	●	●
Upgradeable feature downloads	●*	●	●
Voice control	●*	●	●
Scan-to-Cook technology	●*	●	●
Auto Recipe Conversion	●	●	●
Proof mode	●	●	●
Oven meat probe	●	●	●
Warm mode	●	●	●
Temperature display	●	●	●
Delay bake option	●	●	●
°C and °F programmable	●	●	●
Audible preheat signal	●	●	●
Auto oven shut-off with override	●	●	●
Electronic clock and kitchen timer	●	●	●
Control lock capability	●	●	●
Halogen interior oven lighting	●	●	●
Certified Sabbath mode	●	●	●
Never-Scrub oven racks	●	●	●
Heavy-duty oven racks	1, 1 roller rack	1, 1 roller rack	2
Rack positions	6 embossed	6 embossed	6 embossed
<b>APPEARANCE</b>			
Color appearance**	SS	SS ES BB	SS WW
Handle color**	SS	SS ES BB	SS WW
Handle design	Designer-style	Designer-style	Designer-style
Oven interior	Black gloss	Black gloss	Black gloss
<b>WEIGHTS &amp; DIMENSIONS</b>			
Approx. shipping wt. (lbs.)	134	134	128
Oven cabinet width required (in.)	27	27	27
Overall dimensions, including handle (WxHxD in inches)	26-3/4 x 28-3/4 x 26-5/8	26-3/4 x 28-3/4 x 26-5/8	26-3/4 x 28-3/4 x 26-5/8
Overall oven interior dimensions (WxHxD in inches)	21-1/2 x 17-1/4 x 20	21-1/2 x 17-1/4 x 20	21-1/2 x 17-1/4 x 20
<b>POWER/RATINGS</b>			
240V	3.6	3.6	3.6
208V	2.7	2.7	2.7
240V	20	20	20
208V	20	20	20
Convection wattage	2,400	2,400	
Broiler wattage	3,400	3,400	3,400
Bake wattage	2,600	2,600	2,600

\*WiFi-enabled feature.  
\*\*SS = Stainless, ES = Slate, WW = White on white, BB = Black on black.

**Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.**


27" BUILT-IN SINGLE OVEN DIMENSIONS (IN INCHES)

MODELS PKS7000, JKS5000, JKS3000

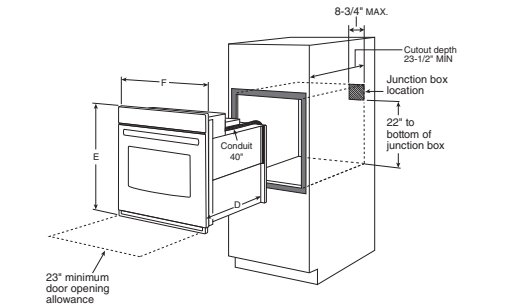

CABINET	PKS7000, JKS5000, JKS3000
A - Overlap of oven at top of cutout	1"
B - Overlap of oven other side of edge of cutout	1"
C - Overlap of oven at bottom of cutout	1"
<b>OVEN</b>	
D - Overall depth	23-1/2"
E - Overall height with trim	28-7/8"
F - Overall width	26-3/4"


OVEN SUPPORT FOR 27" SINGLE OVEN MODELS

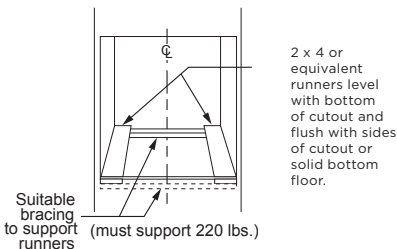

**Note:** These ovens are not approved for stackable installations.

UNDERCOUNTER INSTALLATION DIMENSIONS (IN INCHES)

MODELS PKS7000, JKS5000, JKS3000

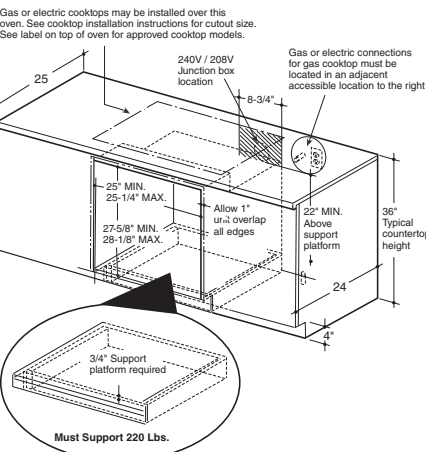

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Note:** For 27" built-in single ovens, if marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

**Note:** 36" ribbon cooktops are approved for use over GE 30" single wall ovens and warming drawers. 30" ribbon cooktops are approved for use over GE 30" and GE 27" single wall ovens and warming drawers. Refer to cooktop and wall oven installation information packed with products for current dimensional data.

**Note:** Oven is rated for use only under GE 30" standard or sealed burner gas and selected GE 30" smoothtop and Calrod® electric cooktops.


**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.




24" BUILT-IN SINGLE OVENS

	GE	
	JRP20SK JRP20WJ JRP20BJ	JRS06SK
FEATURES & CONTROLS		
Capacity (cu. ft.)	2.7	2.7
Oven	Self-clean	Standard-clean
Cleaning time	Variable	
Self-clean oven with delay clean option	●	
Automatic self-clean oven door lock	●	
Variable broil/Four-pass broil	●	●
Control type	Electronic touch	Electronic touch
Temperature display	●	●
Delay bake option	●	●
°C and °F programmable	●	●
Audible preheat signal	●	●
Auto oven shut-off with override	●	●
Electronic clock and kitchen timer	●	●
Control lock capability	●	●
Oven light	●	●
Certified Sabbath mode	●	●
Oven racks	2	2
Rack positions	4	4
APPEARANCE		
	SS WW BB	SS
Color appearance*		
Frameless oven doors*	SS CM glass	SS
Oven door with window	Clear view	Clear view
	SS CM	SS
Handle color*		
Handle design	D-shaped	D-shaped
WEIGHTS & DIMENSIONS		
Approx. shipping weight (lbs.)	113	95
Oven cabinet width required (in.)	24	24
Overall dimensions (WxHxD in inches)	23-3/4 x 28-3/16 x 23-1/8	23-3/4 x 28-3/16 x 23-1/8
Overall oven interior dimensions (WxHxD in inches)	17 x 15 x 18-1/2	17 x 15 x 18-1/2
POWER/RATINGS		
	240V	3.4
	208V	2.6
	240V	20
	208V	20
Amps @		
Broiler wattage	3,400	3,400
Bake wattage	2,650	2,000


\*SS = Stainless, WW = White on white, BB = Black on black, CM = Color-matched.

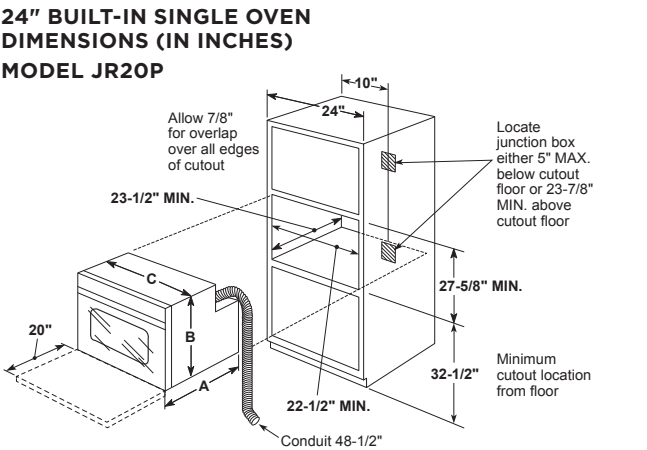

OVEN SUPPORT FOR 24" SINGLE ELECTRIC  
OVEN MODELS JRP20 AND JRP06

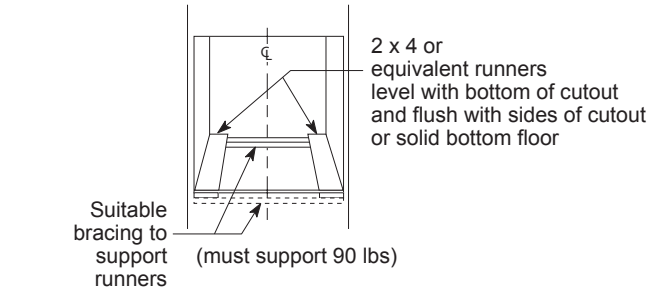

24" BUILT-IN SINGLE OVEN  
DIMENSIONS (IN INCHES)  
MODEL JRS06

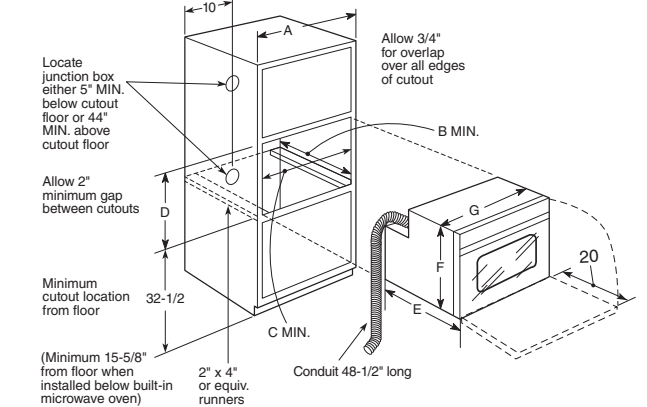

CABINET		JRS06
A—Cabinet width required		24" min.
B—Minimum cabinet depth		23-1/2"
C—Opening width		22-1/2"
D—Opening height		27-5/8" min.
OVEN		
	without handle	23-1/8"
E—Install depth	with handle	28-1/8"
	without trim	27-1/2"
F—Overall height	with trim	28-1/4"
G—Overall width		23-3/4"


Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

30" BUILT-IN TWIN FLEX WALL OVEN

		GE PROFILE™ PTS9200SN
ADA compliant		●
FEATURES & CONTROLS		
Oven capacity (cu. ft.)		2.2/2.8 (5.0 total)
Oven cooking technology	Upper Lower	Traditional Convection
Self-clean oven with Steam Clean option		●
Delay clean option		Variable
Automatic self-clean oven door lock		●
True European Convection with Precise Air		●
Convection Roast		Lower
Convection Bake multi-rack		Lower
Thermal Bake		●
Thermal Broil		●
Eight-pass bake element		●
Eight-pass dual broil element		Lower
Six-pass dual broil element		Upper
Hidden bake oven interior		●
Control type		7" full-color LCD touch screen
WiFi Connect		●*
Upgradeable feature downloads		●*
Scan-to-Cook technology		●*
Voice control		●*
Auto Recipe Conversion		Lower
Proof mode		Lower
Oven meat probe		Lower
Warm mode		●
Temperature display		●
Delay bake option		●
°C and °F programmable		●
Audible preheat signal		●
Auto oven shut-off with override		●
Electronic clock and kitchen timer		●
Control lock capability		●
Halogen interior lighting		●
Certified Sabbath mode		●
Never-Scrub oven racks		●
Heavy-duty oven racks		1, 2 roller racks 5 embossed (2 upper / 3 lower)
Rack positions		
APPEARANCE		
Color appearance**		SS
Handle color**		SS
Handle design		Designer-style
Oven interior		Black gloss
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)		212
Oven cabinet width required (in.)		30
Overall dimensions, including handle (WxHxD in inches)		29-3/4 x 27-13/16 x 23-5/16
Overall oven interior (WxHxD in inches)	Upper Lower	24 x 8-3/4 x 17-7/8 24 x 12-1/2 x 16
POWER/RATINGS		
	240V	4.2
	208V	3.2
	240V	20
	208V	20
Amps @		
Convection wattage		1,300
	Upper Lower	1,700/1,050 2,950
Broiler wattage		
	Upper Lower	1,700 2,200
Bake wattage		

\*WiFi-enabled feature.  
\*\*SS = Stainless.

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

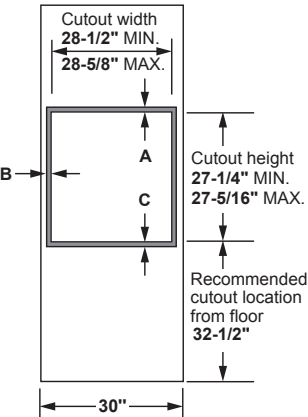

See page 294 for warranty information.

geappliances.com 325


30" AND 27" BUILT-IN WARMING DRAWERS\*

	GE PROFILE™	
	PTW9000SP	PKW7000SP
UFAS/ADA compliant**	●	●
FEATURES & CONTROLS		
Capacity (cubic feet)	1.9	1.67
Control location	Hidden	Hidden
Operation	On/Off rocker switch	On/Off rocker switch
Indicator light	"On"	"On"
Temperature control	Rotary knob	Rotary knob
Proof temperature (°F)	75-95	75-95
Low temperature (°F)	140-160	140-160
Medium temperature (°F)	160-195	160-195
High temperature (°F)	195-230	195-230
Variable-humidity control	Crisp/Moist	Crisp/Moist
Rack configuration	Half rack	Half rack
Drawer glide	Full-extension, ball-bearing glides	Full-extension, ball-bearing glides
APPEARANCE		
Color appearance***	SS	SS
Drawer front***	SS	SS
Handle color***	SS	SS
Handle design	Designer-style	Designer-style
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	65	59
Net weight (lbs.)	59	53
Cabinet width compatibility (in.)	30	27
Interior dimensions (WxHxD in inches)	23-7/8 x 6-1/4 x 22-1/16	20-7/8 x 6-1/4 x 22-1/16
Exterior dimensions (WxHxD in inches)	29-3/4 x 10-1/2 x 23-1/4	26-3/4 x 10-1/2 x 23-3/4
Cutout dimensions (WxHxD in inches)	28-1/2 x 9-1/4 x 23-1/2	25-1/2 x 9-1/4 x 23-1/2
POWER/RATINGS		
Amp rating @ 120V/60Hz	15	15
Element power (watts)	450	450
Power cord length (in.)	56	56
Outlet type	3-prong grounded	3-prong grounded
ACCESSORIES		
Custom panel kit†	ZXD30B	

\*See page 73 for match recommendations.  
\*\*ADA-compliant when installed so the bottom of the drawer is 15"-38" from the floor.  
\*\*\*SS = Stainless.  
†Custom panel will not be flush with adjacent cabinetry drawers and doors.




UNDERCOUNTER INSTALLATION DIMENSIONS (IN INCHES)  
MODELS PTW9000 AND PKW7000

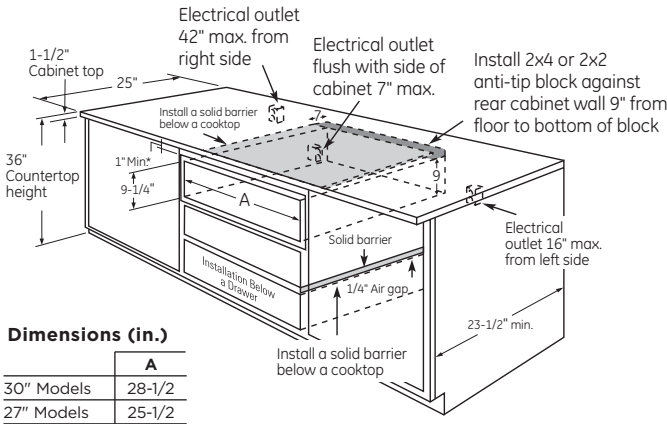

**Note:** When installing the warming drawer below a cooktop, a solid barrier must be installed at least 1" from the lowest point of the bottom of cooktop burner box to the top of the cutout. Use any solid material such as 1/4"-thick plywood. Allow at least 1/4" air gap between the barrier and the top of the warming drawer. See label on top of the warming drawer for approved cooktop models.

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.  
**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.  
**Note:** Use of drawer with ZXD30B custom panel kit will result in the panel not being flush with adjacent cabinet doors and drawers.


INSTALLATION BELOW A SINGLE OR  
DOUBLE WALL OVEN (IN INCHES)  
MODELS PTW9000 AND PKW7000

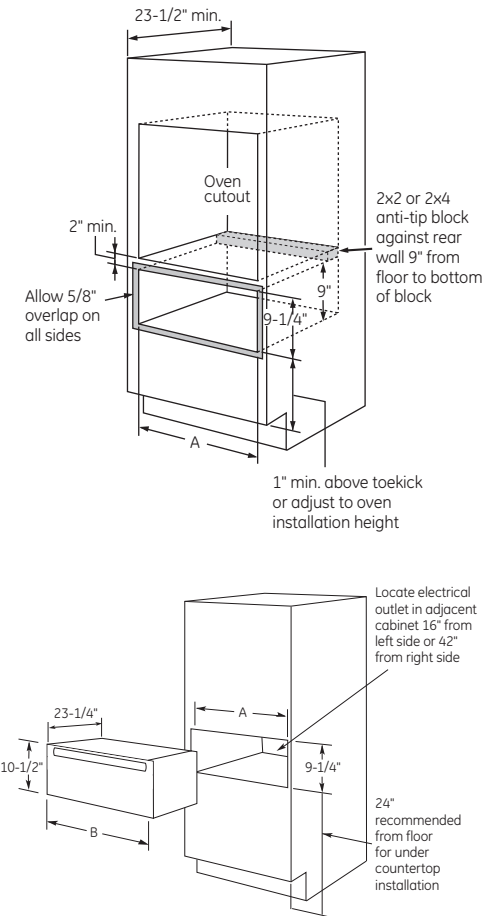

Dimensions (in inches)

	A	B
30" Models	28-1/2	29-3/4
27" Models	25-1/2	26-3/4

**Note:** Additional clearance between cutouts may be required. Check to be sure that oven supports above the warming drawer location do not obstruct the required interior 23-1/2" depth and 9-1/4" height.



(Must support 150 lbs.)

When installed under a cooktop:

Warming drawers are suitable for installation below only certain specified cooktop models. See the label attached to the top of the warming drawer for suitable models. A solid barrier and air gap between cooktop and warming drawer are required.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

30" AND 27" BUILT-IN ADVANTIUM® WALL OVENS


	GE PROFILE		
	PSB9240SF	PSB9120SF PSB9120BL	PSB9100SF
UL® Certified	●	●	●
FEATURES & CONTROLS			
Family-size oven	1.7 cu. ft.	1.7 cu. ft.	1.7 cu. ft.
Stainless steel oven interior	●	●	●
Cooking modes	Speedcook up to 8 times Convection oven 250°–450° Microwave oven ● Warming ● Proofing ● True European Convection	up to 4 times 250°–450° ● ● ● ● Multilevel	up to 4 times 250°–450° ● ● ● ● Multilevel
Oven controls	Controls Dial & glass touch Electronic scrolling display ● Preprogrammed menu items 175 Help pad ● Demo mode ● Interior oven light ● Beeper sound level control 4 levels Variable scroll speed 5 speeds	Dial & glass touch ● 175 ● ● ● 4 levels 5 speeds	Dial & glass touch ● 175 ● ● ● 4 levels 5 speeds
Heating elements	Upper heater power (watts) 2,400 Lower heater power (watts) 500 Convection heater power (watts) 1,500	1,200 375 1,500	1,200 375 1,500
Custom Recipe Saver	30	30	30
Cooking complete reminder	●	●	●
Control lockout	●	●	●
Frameless glass oven door with window	●	●	●
Microwave oven features	Sensor Defrost—Auto/ Time/1-lb. Quick ● Softening/Melt ● Microwave power output watts 950	● ● ● ● 975	● ● ● ● 975
30"/27" appearance	30"	30"	27"
Under-the-counter installation	●	●	●
APPEARANCE			
Color appearance*	SS TS ES	SS TS ES	SS TS ES
Handle color*	SS TS SS	SS TS SS	SS TS SS
Handle design	Designer-style	Designer-style	Designer-style
WEIGHTS & DIMENSIONS			
Overall oven interior dimensions (WxHxD in inches)	20-1/8 x 8-1/2 x 17	20-1/8 x 8-1/2 x 17	20-1/8 x 8-1/2 x 17
Overall dimensions (WxHxD in inches)	29-3/4 x 19 x 23-1/4	29-3/4 x 19 x 23-1/4	26-3/4 x 19 x 23-1/4
Overall exterior width (W)	29-3/4	29-3/4	26-3/4
Overall exterior height (H)	19	19	19
Overall exterior depth, not including handle (D)	21-1/2	21-1/2	21-1/2
Oven cabinet width required (in.)	30	30	27" minimum
Cutout height	17-1/2	17-1/2	17-1/2
Cutout width	25-1/4	25-1/4	25-1/4
Cutout depth	23-1/2	23-1/2	23-1/2
Approx. shipping weight (lbs.)	115	115	91
POWER/RATINGS			
Input volt/hertz	240V/208V 60Hz	120V/60Hz	120V/60Hz
Input amps/watts (max)	30A/6.3KW-total	15A/1.8KW	15A/1.8KW
ACCESSORIES			
Cookbook	●	●	●
Cooking guide	●	●	●
Grill tray	●	●	●
Cooking tray	●	●	●
Microwave tray	●	●	●
Rack	Full-width	Pedestal	Pedestal
Broil/Toast tray	●	●	●
Storage drawer	UXB903SNSS Optional	UXB903SNSS Optional	N/A
WARRANTY			
Limited one-year in-home warranty**	●	●	●
Limited five-year magnetron warranty**	●	●	●

\*SS = Stainless, TS = Black Stainless, ES = Slate.  
\*\*See written warranty for details.



Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


DIMENSIONS AND CABINET  
INSTALLATION (IN INCHES)

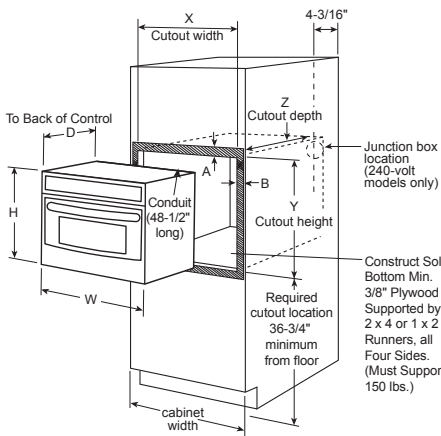


A = Allow clearance of 5/8" from the top and 1-1/8" from the bottom.  
B = Allow clearance of 2-3/8" from the sides on 30" product and 7/8" for 27" product.

Required for UL® approval on models PSB9240 and PSB9100  
**Note:** PSB9120 may be installed at a minimum of 5" from the floor.

DIMENSIONS AND CABINET  
INSTALLATION (IN INCHES)

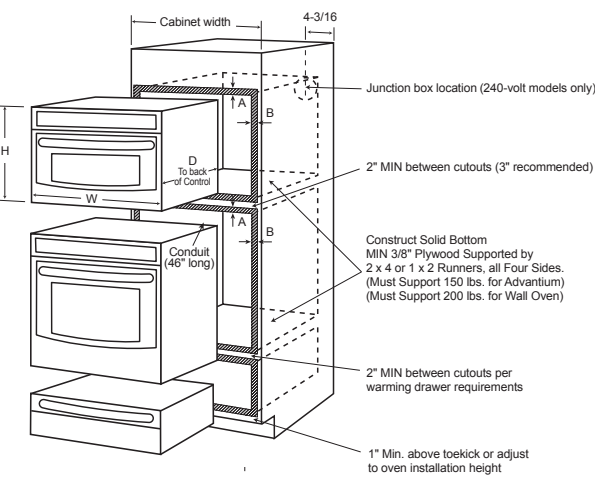

A = Allow clearance of 5/8" from the top and 1-1/8" from the bottom.  
B = Allow clearance of 2-3/8" from the sides on 30" product and 7/8" for 27" product.



240-volt electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

**Important:** Before installing, consult installation instructions packed with product for current dimensional data.

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

	CABINET WIDTH	W WIDTH	H HEIGHT	D DEPTH (TO BACK OF CONTROL)	X CUTOUT WIDTH	Y CUTOUT HEIGHT	Z CUTOUT DEPTH
PSB9240 and PSB9120 <b>without</b> storage drawer	30"	29-3/4"	19"	21-1/2"	25-1/4"	17-1/2"	23-1/2"
PSB9240 and PSB9120 <b>with</b> storage drawer	30"	29-3/4"	22-1/4"	21-1/2"	25-1/4" min. to 28-1/2" max.	21"	23-1/2"
PSB9100	27"	26-3/4"	19"	21-1/2"	25-1/4"	17-1/2"	23-1/2"



**Note:** See wall oven and warming drawer section for complete product and cutout dimensions.



## 30" BUILT-IN MICROWAVE/ CONVECTION OVEN

		GE PROFILE™
		PWB7030SL
<b>FEATURES &amp; CONTROLS</b>		
Family-size oven		1.7 cu. ft.
Control type		Glass touch
Cooking technology		Convection
Microwave watts (IEC-705)		975
Power levels		10
	Combination Fast Cook	●
Convection	Convection Bake/Broil	●
cooking controls	Warm/Proof	●
	Auto Cook	●
	Popcorn	●
Sensor controls	Steam Cook	●
Convenience	Time Cook	●
controls	Defrost Weight/Time	●
Add 30 Seconds		● (My Cycle)
Control lockout		●
Timer on/off		●
Cooking complete reminder		●
Demo mode		●
Microwave oven interior		Stainless steel
Electronic digital display with clock		●
Interior lighting		Halogen
Oven racks		Pedestal
Turntable		●
Turntable diameter (in.)		16
<b>APPEARANCE</b>		
Color appearance*		SS
Handle		●
<b>WEIGHTS &amp; DIMENSIONS</b>		
Overall oven interior dimensions (WxHxD in inches)		20-1/16 x 8-1/2 x 17
Approx. shipping weight (lbs.)		100
<b>POWER/RATINGS</b>		
Input Volts/Hertz		120V/60Hz
Input Amps/Watts (max.)		14.0/1,600
*SS = Stainless, ES = Slate.		

**30" BUILT-IN MICROWAVE/CONVECTION  
OVEN DIMENSIONS (IN INCHES)  
MODEL PWB7030**

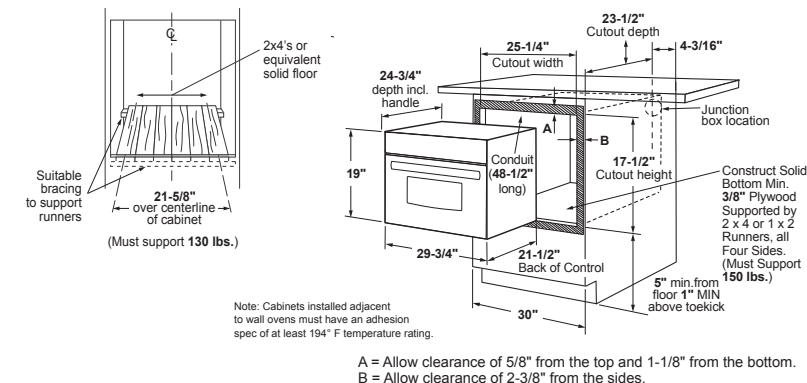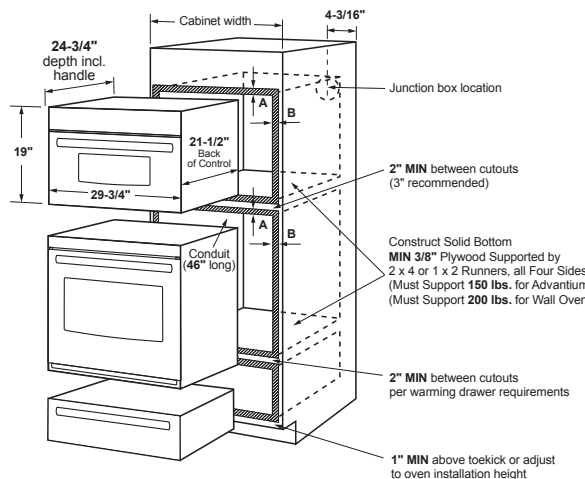

## BUILT-IN MICROWAVE OVEN

	GE PROFILE
UFAS/ADA compliant*	●
<b>CAPACITY</b>	
Oven cavity (cu. ft.)	2.2
<b>FEATURES</b>	
Watts (IEC-705 test procedure)	1,100
Electronic touch controls	●
Scrolling display with Help pad	●
Demo mode	●
Electronic digital display with clock	●
Display On/Off	●
Popcorn	●
Beverage	●
Reheat	●
Vegetable	●
Sensor controls	●
Potato	●
Express Cook	1-6 min.
Instant On controls	●
Time Cook	I & II
Add 30 Seconds	●
Weight/Time Defrost	●
Power levels	10
Turntable	Recessed
Turntable diameter (in.)	16-1/2
Timer on/off	●
Cooking Complete reminder	●
Control lockout	●
<b>APPEARANCE</b>	

Available finishes for  
built in trim kit\*\*

<b>WEIGHTS &amp; DIMENSIONS</b>		
Approx. shipping weight (lbs.)		51
Dimensions (WxHxD in inches)		17-5/16 x 11-1/16 x 19-1/16
	Cavity	
	Exterior***	24-1/8 x 14 x 19-3/4
<b>POWER/RATINGS</b>		
Input Volt/Hz		120/60
Electric input	Watts	1,650
@ 120V	Amperage	13.9
<b>ACCESSORIES</b>		
Cooking guide label		●
Right-angle plug		●

\*Model can be UFAS/ADA compliant in countertop or built-in configuration. For built-in, please see information for individual model.

\*\*SS = Stainless, TS = Black Stainless, ES=Slate, DS=Black Slate, WW = White on white, BB = Black on black.


\*\*\*Exterior dimensions: height includes feet, depth does not include handle.

## MICROWAVE OVEN

		GE PROFILE CONVECTION	
		PEB9159SR PEB9159DR	
UFAS/ADA compliant*		●/●	
California Prop 65		●	
CAPACITY			
Oven cavity (cu. ft.)		1.5	
FEATURES			
Watts (IEC-705 test procedure)		1,000	
Electronic touch controls		●	
Scrolling display with Help pad		●	
Electronic digital display with clock		●	
Display On/Off		●	
Convection controls	Convection	●	
	Combination (Conv/MWO)	●	
	Popcorn	●	
	Beverage	●	
Sensor controls	Reheat	●	
	Cook	●	
Express Cook		1-6 min.	
Instant On controls		●	
Time Cook		I & II	
Add 30 Seconds		●	
Auto/Time Defrost		●	
Power levels		10	
Turntable		Recessed	
Turntable diameter (in.)		13-1/2	
Timer on/off		●	
Cooking complete reminder		●	
Control lockout		●	
CONTROLS TOUCHPAD			
Add 30 seconds		●	
Broil		●	
Convection bake		●	
Convection roast		●	
Cook time		●	
Mute On/Off		●	
APPEARANCE			
Color appearance**		SS WW, BB	
Case color**		Gray CM	
WEIGHTS & DIMENSIONS			
Approx. shipping weight (lbs.)		44	
Dimensions (WxHxD in inches)		15-1/2 x 10-7/8 x 15-1/2	
Cavity			
Exterior***		21-3/4 x 13 x 20	
POWER/RATINGS			
Input Volt/Hz		120/60	
Electric input Watts		1,500	
@ 120V Amperage		13	
ACCESSORIES			
Cooking guide label		●	
Oven rack		2-pedestal	
Optional built-in kit†		●	
Right-angle plug		●	

\*Model can be UFAS/ADA compliant in countertop or built-in configuration. For built-in, please see information for individual model.  
 \*\*SS = Stainless, ES = Slate, WW = White on white, BB = Black on black, CM = Color-matched.

†See page 330 for built-in trim kit information.

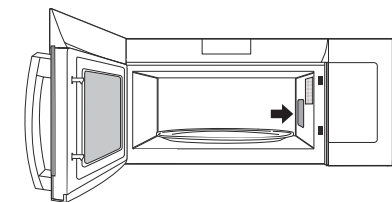

## BUILT-IN TRIM KIT FOR 2.2 MICROWAVE OVENS

These trim kits allow for built-in installation of the 2.2 microwave oven in a wall or cabinet alone, or over a Profile 30" or 27" single electric wall oven. Do not install microwave lower than 36" above the floor.


### 30" TRIM KITS FOR MODEL PEB7227

MODEL	Z	30" DELUXE TRIM KIT
PEB7227ANDD	29-3/4"	JX7230SLSS - Stainless
PEB7227ANDD	29-3/4"	JX7230BLTS - Black Stainless
PEB7227ANDD	29-3/4"	JX7230ELES - Slate
PEB7227ANDD	29-3/4"	JX7230FMDs - Black Slate
PEB7227DLWW	29-3/4"	JX7230DLWW - White
PEB7227DLBB	29-3/4"	JX7230DLBB - Black

## 27" TRIM KITS FOR MODEL PEB7227

MODEL	Z	27" DELUXE TRIM KIT
PEB7227ANDD	26-3/4"	JX7227SLSS - Stainless
PEB7227ANDD	26-3/4"	JX7227BLTS - Black Stainless
PEB7227ANDD	26-3/4"	JX7227ELES - Slate
PEB7227ANDD	26-3/4"	JX7227FMDS - Black Slate
PEB7227DLWW	26-3/4"	JX7227DLWW - White
PEB7227DLBB	26-3/4"	JX7227DLBB - Black

### CUTOUT DIMENSIONS MODEL PEB7227

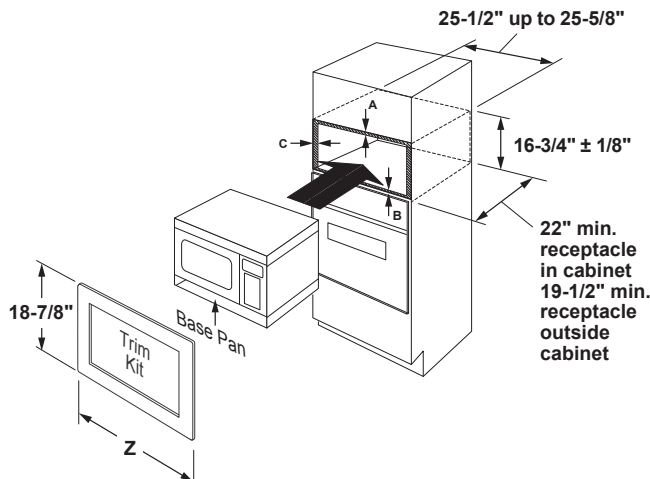

Cabinet overlap requirements	30"	27"
A - Overlap of trim kit over top of cabinet	1"	1"
B - Overlap of trim kit over bottom of cabinet	1-1/8"	1-1/8"
C - Overlap of trim kit over sides of cabinet	2-1/8"	5/8"

**Note:**  
Allow an additional inch  
of clearance beyond trim  
frame on all sides

This information is not intended to be used for installing unit described.  
Before installing, consult installation instructions packed with product/kit  
for current dimensional data.

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

See page 294 for warranty information.

geappliances.com 329

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

MICROWAVE OVEN TRIM KITS

BUILT-IN TRIM KITS FOR 1.5 CU. FT. MICROWAVE OVENS

Built-in trim kits allow installation in a wall, cabinet alone, or over a 30" or 27" single electric wall oven. Use a convection wall oven under these convection microwave ovens for a complete convection cooking center. Do not install microwave lower than 36" above the floor.


30" TRIM KITS FOR MODEL PEB9159

MODEL	Z	30" DELUXE TRIM KIT
PEB9159SJSS	29-3/4"	JX9153SJSS—Stainless
PEB9159EJES	29-3/4"	JX9153EJES—Slate
PEB9159DJWW	29-3/4"	JX9153DJWW—White
PEB9159DJBB	29-3/4"	JX9153DJBB—Black

27" TRIM KITS FOR MODEL PEB9159

MODEL	Z	27" DELUXE TRIM KIT
PEB9159SJSS	26-3/4"	JX9152SJSS—Stainless
PEB9159EJES	26-3/4"	JX9152EJES—Slate
PEB9159DJWW	26-3/4"	JX9152DJWW—White
PEB9159DJBB	26-3/4"	JX9152DJBB—Black

CUTOUT DIMENSIONS  
MODEL PEB9159

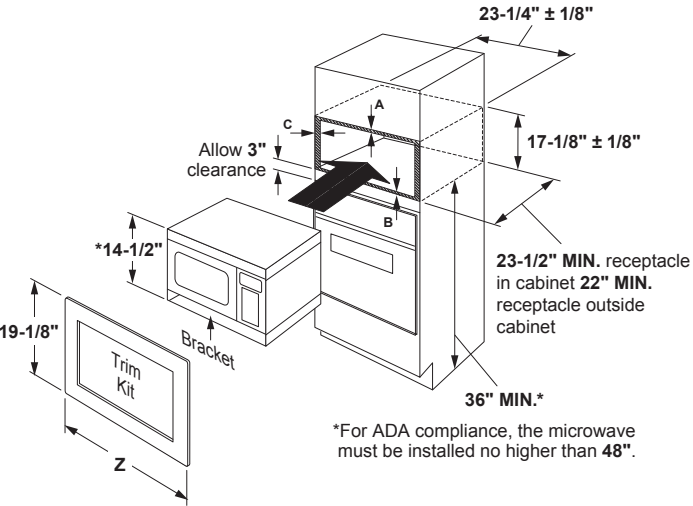


CABINET OVERLAP REQUIREMENTS	30"	27"
A - Overlap of trim kit over top of cabinet	1"	1"
B - Overlap of trim kit over bottom of cabinet	1"	1"
C - Overlap of trim kit over sides of cabinet	3-5/16"	1-7/8"

**NOTE:**  
Allow an additional inch of clearance beyond trim frame on all sides.

The wave guide cover is a thin specialized sheet consisting of mica material which covers the outlet where microwaves are emitted for cooking. Microwaves pass freely through this cover while it prevents steam and food particles from entering the magnetron area during cooking. **This cover is not to be removed or altered.** Doing so may void the product's warranty.

Location of wave guide cover will vary per model.

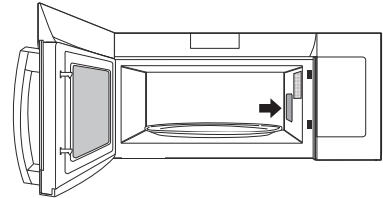

SPACEMAKER® MICROWAVE OVEN

	GE PROFILE™
	PEM31SF PEM31BM PEM31DF
UFAS/ADA compliant*	●
California Prop 65	●
CAPACITY	
Oven cavity (cu. ft.)	1.1
FEATURES	
Watts (IEC-705 test procedure)	800
Electronic touch controls	●
Electronic digital display with clock	●
Popcorn	●
Beverage	●
Reheat	●
Vegetable	●
Potato	●
Defrost:	
Weight/Time	●
Sensor controls	
Express Cook	1-6 min.
Instant On controls	●
Time Cook	I & II
Add 30 Seconds	●
Power levels	10
Turntable On/Off	●
Turntable diameter (in.)	10-5/8
Kitchen timer/Timer (On/Off)	— / ●
Cooking complete reminder	●
Control lockout	●
APPEARANCE	
	SS
	DS
Color appearance**	WW, BB
	Gray
	Gray
	CM
Case color**	
WEIGHTS & DIMENSIONS	
Approx. shipping weight (lbs.)	33
Dimensions***	
Cavity (WxHxD in inches)	17-3/8 x 9 x 12-1/4
Exterior (WxHxD in inches)	24 x 12-1/8 x 12-7/8
POWER/RATINGS	
Input Volt/Hz	120V/60Hz
Electrical input	
Watts @ 120V	1,200
Amperage	10.5
ACCESSORIES	
Cooking guide label	●
Optional built-in kit	●
Optional hanging kit	JXA019K†
Right-angle plug	●

\*Model must be in built-in configuration to be UFAS/ADA compliant.  
\*\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White on white, BB = Black on black, CM = Color-matched.  
\*\*\*Exterior dimensions: height includes feet, depth does not include handle.  
†JXA019K is available at additional cost.

BUILT-IN TRIM KIT FOR 1.1 CU. FT. MICROWAVE OVENS

Built-in trim kits allow installation in a wall, cabinet alone, or over a 30" or 27" GE electric wall oven. This kit should not be installed over a gas wall oven. Do not install microwave lower than 36" above the floor.


30" DELUXE TRIM KITS FOR MODEL PEM31

MODEL	Z	30" DELUXE TRIM KIT
PEM31SFSS	29-7/8"	JX830SFSS—Stainless
PEM31BLTS	29-7/8"	JX830BMTS—Black Stainless
PEM31EFES	29-7/8"	JX830EFES—Slate
PEM31FMDS	29-7/8"	JX830FMDS—Black Slate
PEM31DFWW	29-7/8"	JX830DFWW—White
PEM31DFBB	29-7/8"	JX830DFBB—Black

27" TRIM KITS FOR MODEL PEM31

MODEL	Z	27" DELUXE TRIM KIT
PEM31SFSS	26-7/8"	JX827SFSS—Stainless
PEM31BLTS	26-7/8"	JX827BMTS—Black Stainless
PEM31EFES	26-7/8"	JX827EFES—Slate
PEM31FMDS	26-7/8"	JX827FMDS—Black Slate
PEM31DFWW	26-7/8"	JX827DFWW—White
PEM31DFBB	26-7/8"	JX827DFBB—Black

CUTOUT DIMENSIONS

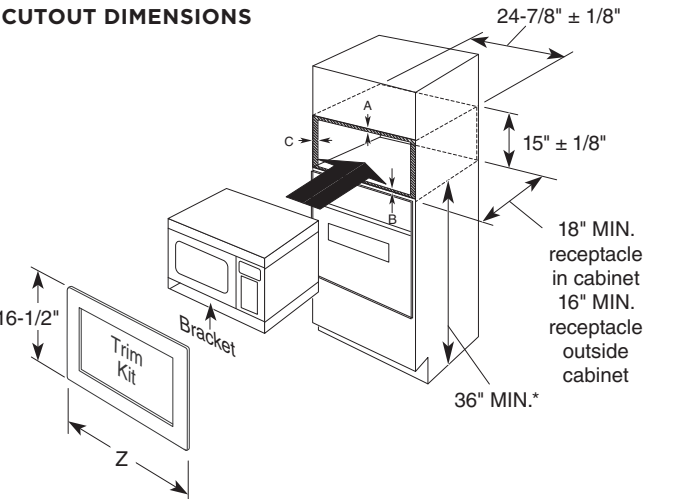

Cabinet overlap requirements	30"	27"
A - Overlap of trim kit over top of cabinet	3/4"	3/4"
B - Overlap of trim kit over bottom of cabinet	5/8"	5/8"
C - Overlap of trim kit over sides of cabinet	2-1/2"	1"

**Note:**  
Allow an additional inch of clearance beyond trim frame on all sides

\*For ADA compliance, the microwave must be installed no higher than 48".


This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

UNDERCABINET MOUNTING KIT  
(PART NO. JXA019K) FOR  
MICROWAVE OVEN

MODEL PEM31

(Sold separately)

Not to be used over a thermal oven.



Undercabinet Installation

Install Spacemaker microwave ovens in just a few easy steps with the mounting template, which provides all the necessary measurements. These microwave ovens can be installed on practically any wood or metal cabinets. Installation may vary depending on cabinets.

**Note:** 120V, 60-cycle, grounded power receptacle location optional on back within cabinet opening.




36" BUILT-IN ELECTRIC COOKTOPS

	GE PROFILE™			GE	
	INDUCTION	PP9036SJ PP9036DJ	PP7036DJ	JP5036SJ JP5036DJ	JP3036SL JP3036TL JP3036DL
	PHP9036SJ PHP9036DJ				
UFAS/ADA compliant	●	●	●	●	●
FEATURES					
Element type	Induction	Ribbon	Ribbon	Ribbon	Ribbon
Number of elements	5		5	5	5
SyncBurners	●	●	●		
Hot surface indicators	●	●	●	●	●
Cooktop "On" indicators	●	●	●	●	●
Pan presence & size sensor	●				
Custom settings		●			
Multi-element timer		●			
Kitchen timer	●	●		●	
Keep Warm setting		●	●	●	●
Melt setting	●	●	●	●	●
CONTROLS					
Type	Digital touch with Red LED	Glide touch with Red LED	Knob with backlit Red LED	Digital touch with Red LED	Knob
Location	Front	Front	Front	Front	Front
Control lock	●	●	●	●	
All-Off	●	●		●	
COOKTOP					
Element—left front	7" 2,500W	7" 1,500W	7" 1,500W	7" 1,500W	7" 1,500W
Element—left rear	7" 2,500W	7" 1,500W	7" 1,500W	6" 1,200W	6" 120W warming zone
Element—right front	8" 3,200W	8"/5" 2,400W Power Boil	8"/5" 2,400W Power Boil	8"/5" 2,400W Power Boil	8" 2,500W Power Boil
Element—right rear	6" 1,800W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W
Element—center	11" 3,700W	12"/9"/6" 3,000W tri-ring	12"/9"/6" 3,000W tri-ring	12"/9"/6" 3,000W tri-ring	12"/9" 2,700W dual
APPEARANCE					
Color appearance*	SS BB	SS BB	BB	SS BB	SS WW BB
Cooktop color	Black Black	Black	Black	Black	Black True white Black
Cooktop surface	Ceramic-glass	Ceramic-glass Ceramic-glass with beveled edge	Ceramic-glass	Ceramic-glass	Ceramic-glass Stainless trim
Cooktop frame	Stainless trim —	Stainless trim —	—	Stainless trim —	— SS appearance WW gloss BB gloss
Knob color*			BB gloss		
WEIGHTS & DIMENSIONS					
Approx. shipping wt. (lbs.)	55	58	53	53	53
Cabinet width	36	36	36	36	36
Overall dimensions (WxHxD in inches)	36-1/8 x 4-5/8 x 20-1/2 36 x 4-5/8 x 20-3/8	36-1/8 x 5-9/16 x 20-1/2 36 x 5-9/16 x 20-3/8	36-1/8 x 5-9/16 x 20-1/2 36 x 5-9/16 x 20-3/8	36-1/8 x 5-9/16 x 20-1/2 36 x 5-9/16 x 20-3/8	36-1/8 x 3-3/8 x 21 36 x 3-3/8 x 20-7/8
Cutout dimensions (WxD in inches)	33-7/8 x 19-1/8	33-7/8 x 19-1/8	33-7/8 x 19-1/8	33-7/8 x 19-1/8	33-7/8 x 19-1/8
POWER/RATINGS					
240V	11.1	9.5	9.6	9.3	8.0
KW rating @ 208V	9.6	7.2	7.2	7.0	6.0
240V	50	40	40	40	33.4
Amps @ 208V	50	40	40	40	29.0
OPTIONAL ACCESSORIES					
Griddle	JXGRIDL1	JXGRIDL1	JXGRIDL1		

\*SS = Stainless, WW = White on white, BB = Black on black.

COUNTER INSTALLATION DIMENSIONS (IN INCHES)

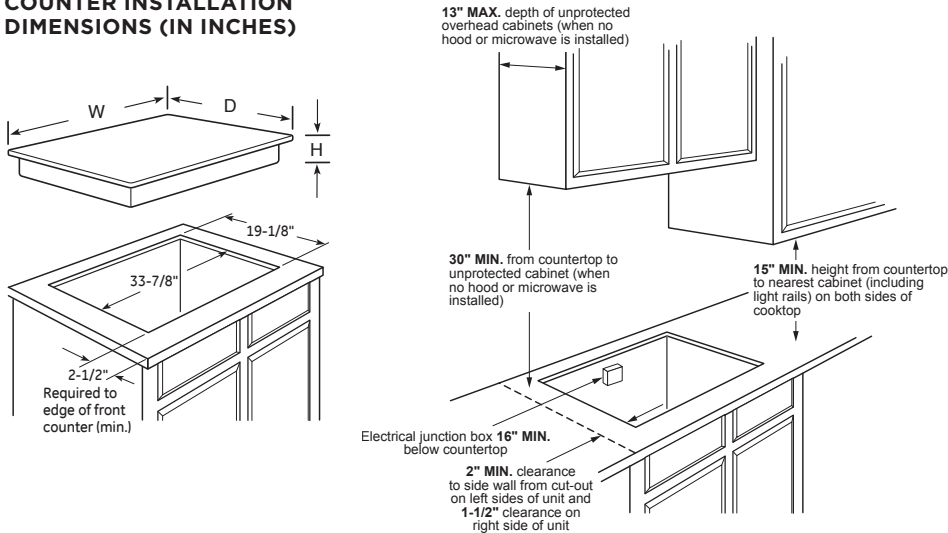


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

30" BUILT-IN ELECTRIC COOKTOPS

	GE PROFILE			GE	
	INDUCTION	PP9030SJ PP9030DJ	PP7030DJ	JP5030SJ JP5030DJ	JP3030SJ JP3030TJ JP3030DJ
	PHP9030SJ PHP9030DJ				
UFAS/ADA compliant	●	●	●	●	●
FEATURES					
Element type	Induction	Ribbon	Ribbon	Ribbon	Ribbon
Number of elements	4	5	5	4	4
SyncBurners	●	●	●	●	
Hot surface indicators	●	●	●	●	●
Cooktop "On" indicators	●	●	●	●	●
Pan presence & size sensor	●				
Custom settings		●			
Multi-element timer		●			
Kitchen timer	●	●		●	
Keep Warm setting		●	●	●	●
Melt setting	●	●	●	●	●
CONTROLS					
Type	Digital touch w/Red LED	Glide touch w/Red LED	Knob w/backlit Red LED	Digital touch w/Red LED	Knob
Location	Front	Front	Front	Front	Right
Control lock	●	●	●	●	
All-Off	●	●		●	
COOKTOP					
Element—left front	7" 2,500W	7" 1,500W	7" 1,500W	7" 1,500W	6" 1,200W
Element—left rear	7" 2,500W	7" 1,500W	7" 1,500W	7" 1,500W	8" 2,500W Power Boil
Element—right front	11" 3,700W	8"/5" 2,200W dual	8"/5" 2,200W dual	9"/6" 3,100W Power Boil	8" 2,500W Power Boil
Element—right rear	6" 1,800W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W
Element—center		9"/6" 3,100W Power Boil	9"/6" 3,100W Power Boil		
APPEARANCE					
Color appearance*	SS BB	SS BB	BB	SS BB	SS WW BB
Cooktop color	Black Black	Black	Black	Black	Black True white Black
Cooktop surface	Ceramic-glass	Ceramic-glass Ceramic-glass w/beveled edge	Ceramic-glass	Ceramic-glass	Ceramic-glass Stainless trim
Cooktop frame	Stainless trim —	Stainless trim —	—	Stainless trim —	— SS appearance WW gloss BB gloss
Knob color*			BB gloss		
WEIGHTS & DIMENSIONS					
Approx. shipping wt. (lbs.)	44	46	47	44	43
Cabinet width	30	30	30	30	30
Overall dimensions (WxHxD in inches)	29-7/8 x 4-5/8 x 21 29-7/8 x 4-5/8 x 21	29-7/8 x 5-9/16 x 21 29-3/4 x 5-9/16 x 20-7/8	29-7/8 x 5-9/16 x 21 29-7/8 x 5-9/16 x 21	29-7/8 x 5-9/16 x 21 29-3/4 x 5-9/16 x 20-7/8	29-7/8 x 4 x 21 29-3/4 x 4 x 20-7/8
Cutout dimensions (WxD in inches)	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8
POWER/RATINGS					
240V	7.4	9.5	9.4	7.3	7.4
KW rating @ 208V	6.4	7.1	7.1	5.5	5.6
240V	40	40	40	40	40
Amps @ 208V	40	40	40	30	30
OPTIONAL ACCESSORIES					
Griddle	JXGRIDL1	JXGRIDL1	JXGRIDL1	JXGRIDL1	
Trim kit	JXTR32B	JXTR32B	JXTR32B	JXTR32B	JXTR32B JXTR32W

\*SS = Stainless, WW = White on white, BB = Black on black.

COUNTER INSTALLATION DIMENSIONS (IN INCHES)

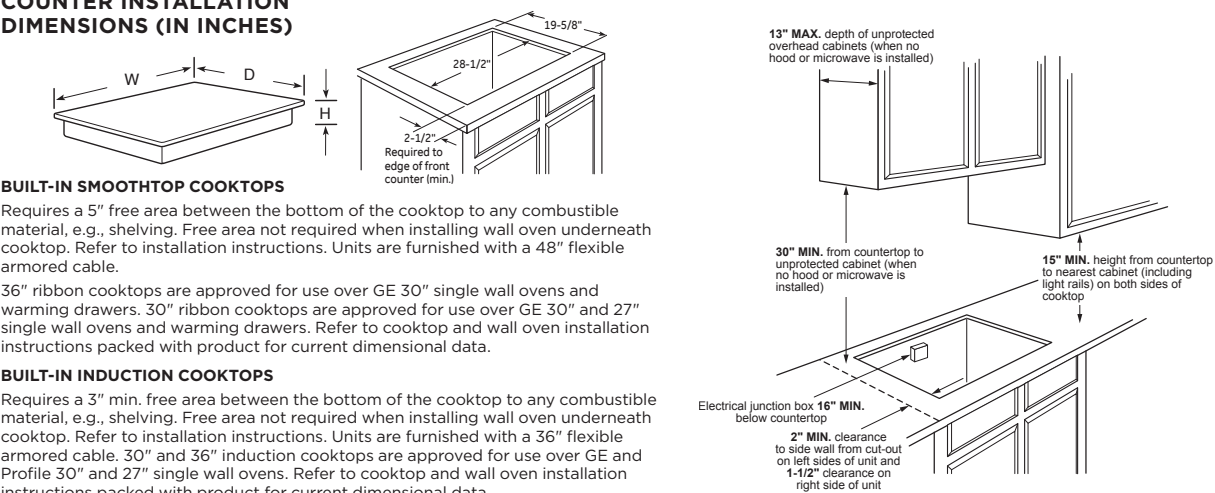

**FILLER TRIM KIT**  
When replacing an old GE 30" cooktop (with larger opening) with new 30" models, use the following one-piece trim kit to fill in the oversized hole. Available at additional cost.  
JXTR32B (Black)  
JXTR32W (White)

**INSTALLATION INFORMATION**  
Before installing, consult installation instructions packed with product for current dimensional data.


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

21" BUILT-IN ELECTRIC COOKTOP

	GE
	JP3021DP
UFAS/ADA compliant	●
FEATURES & CONTROLS	
Element type	Ribbon
Number of elements	2
Control type	Knob (infinite switch)
Control location	Front right
Control lock	No
Knob cleaning	Dishwasher-safe
Cooktop "On" indicators, location	1, front right
COOKTOP	
Element—left front	9"/6" 2,500W
Element—left rear	6" 1,200W
APPEARANCE	
Color appearance*	BB
Cooktop color	Patterned black
Cooktop surface	Ceramic-glass
Knob color	Black plastic
WEIGHTS & DIMENSIONS	
Approx. shipping wt. (lbs.)	20
Net weight (lbs.)	17
Cabinet width compatibility (in.)	21
Overall dimensions (WxHxD in inches)	21-1/2 x 3 x 17-1/8
Cutout dimensions (WxD in inches)	20-1/8 x 16-1/8
POWER/RATINGS	
240V	3.7
KW rating @ 208V	3.2
240V	20
Amps @ 208V	20


\*BB = Black on black

COOKTOP DIMENSIONS (IN INCHES)

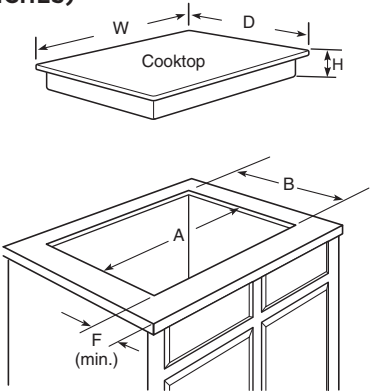

Model	OVERALL			CUTOUT		MINIMUM SPACING TO NEAREST COMBUSTIBLE WALL			TO EDGE OF FRONT COUNTER (MIN.)	
	W	D	H	A	B	C	R	L	F	
JP3021	21-1/2	17-1/8	3-1/4	19-7/8	15-15/16	2	1-3/4	1-3/4		2-3/4

COUNTER INSTALLATION DIMENSIONS (IN INCHES) MODEL JP3021

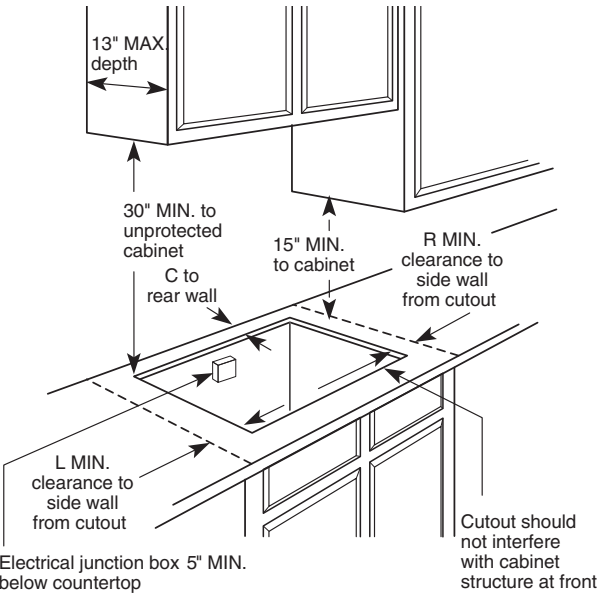

BUILT-IN ELECTRIC COOKTOPS


Required free area between the bottom of the cooktop and any combustible material, e.g., shelving, is 1-1/2" minimum on model JP3021. Free area not required when installing wall oven underneath. Requires an 18" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

**Note:** The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered.

INSTALLATION INFORMATION

Before installing, consult installation instructions packed with product for current dimensional data.

COUNTER INSTALLATION DIMENSIONS (IN INCHES) MODEL JP3021

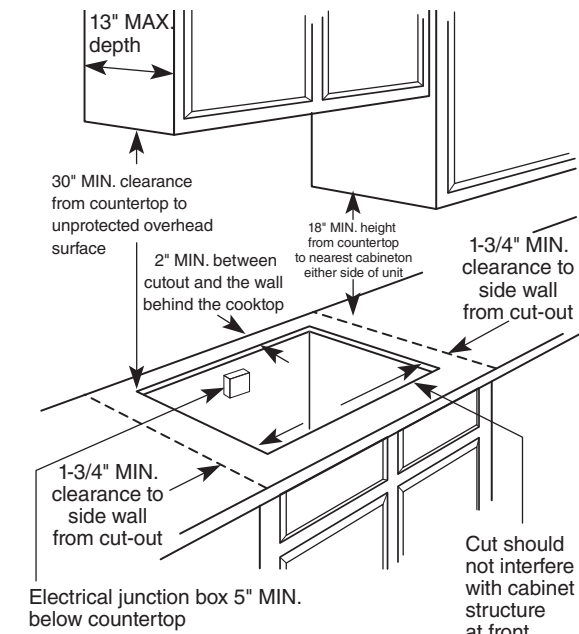

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

36" BUILT-IN GAS COOKTOPS

	GE PROFILE™		GE	
	PGP9036SL	PGP7036SL	JGP5036SL JGP5036DL	JGP3036SL JGP3036DL
UFAS/ADA compliant	●	●	●	●
FEATURES & CONTROLS				
Number of burners	5	5	5	5
Control location	Front center	Front center	Front center	Front center
Control lock	●			
Heavy-duty knobs	●	●		
Backlit knobs	White LED	White LED		
Knob cleaning	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe
BURNER CONFIGURATION*				
Burner type	Sealed	Sealed	Sealed	Sealed
Ignition type	Electronic	Electronic	Electronic	Electronic
Burner-left front BTUs (NG/LPG)	9,500/9,500	9,500/9,500	9,500/9,500	12,000/12,000
Burner-left rear BTUs (NG/LPG)	9,500/9,500	9,500/9,500	9,500/9,500	9,500/9,500
Burner-right front BTUs (NG/LPG)	15,000/15,000 Power Boil	15,000/15,000 Power Boil	15,000/15,000 Power Boil	15,000/15,000 Power Boil
Burner-right rear BTUs (NG/LPG)	5,000/5,000	5,000/5,000	5,000/5,000	9,500/9,500
Burner-center BTUs (NG/LPG)	18,000/18,000 Tri-ring	18,000/18,000 Power Boil	15,000/15,000 Power Boil	5,000/5,000
GRATES				
Number of grates	3	3	3	3
Grate construction	Matte black, heavy-cast	Matte black, heavy-cast	Matte black, heavy-cast	Matte black, standard-cast
Grate configuration	Continuous	Continuous	Continuous	Continuous
Cast-iron griddle	Included (JXGRIDL236)	Optional (JXGRIDL236)	Optional (JXGRIDL236)	
APPEARANCE				
Color appearance**	SS	SS	SS/BB	SS/WW, BB
Cooktop color**	SS	SS	SS/BB	SS/WW, BB
Cooktop surface	Deep-recessed	Deep-recessed	Deep-recessed	Deep-recessed
Knob color**	SS appearance	SS appearance	SS appearance Gloss black	SS appearance Gloss white, Gloss black
WEIGHTS & DIMENSIONS				
Approx. shipping wt. (lbs.)	57	57	46	44
Net weight (lbs.)	51	51	40	38
Cabinet width compatibility (in.)	36	36	36	36
Overall dims. (WxHxD in inches)	36 x 5-1/2 x 21	36 x 5-1/2 x 21	36 x 5-1/2 x 21	36 x 4-3/4 x 21
Cutout dims. (WxD in inches)	33-7/8 x 19-1/8	33-7/8 x 19-1/8	33-7/8 x 19-1/8	33-7/8 x 19-1/8
POWER/RATINGS				
Amp Rating @ 120V, 60Hz	5	5	5	5

\*A set of LP orifices is included with each cooktop for LP conversion. Factory set for natural gas.  
\*\*SS = Stainless, WW = White on white, BB = Black on black.




30" BUILT-IN GAS COOKTOPS

	GE PROFILE		GE	
	PGP9030SL	PGP7030SL	JGP5030SL JGP5030DL	JGP3030SL JGP3030DL
UFAS/ADA compliant	●	●	●	●
FEATURES & CONTROLS				
Number of burners	5	5	5	4
Control location	Front center	Front center	Front center	Right side
Control lock	●			
Heavy-duty knobs	●	●		
Backlit knobs	White LED	White LED		
Knob cleaning	Dishwasher-safe	Dishwasher-safe	Dishwasher- safe	Dishwasher-safe
BURNER CONFIGURATION*				
Burner type	Sealed	Sealed	Sealed	Sealed
Ignition type	Electronic	Electronic	Electronic	Electronic
Burner-left front BTUs (NG/LPG)	9,500/9,500	9,500/9,500	9,500/9,500	15,000/15,000 Power Boil
Burner-left rear BTUs (NG/LPG)	9,500/9,500	9,500/9,500	9,500/9,500	5,000/5,000
Burner-right front BTUs (NG/LPG)	12,000/12,000	12,000/12,000	12,000/12,000	12,000/12,000
Burner-right rear BTUs (NG/LPG)	5,000/5,000	5,000/5,000	5,000/5,000	9,500/9,500
Burner-center BTUs (NG/LPG)	18,000/18,000 Tri-ring	18,000/18,000 Power Boil	15,000/15,000 Power Boil	
GRATES				
Number of grates	3	3	3	2
Grate construction	Matte black, heavy-cast	Matte black, heavy-cast	Matte black, heavy-cast	Matte black, standard-cast
Grate configuration	Continuous	Continuous	Continuous	Continuous
Cast-iron griddle	Included (JXGRIDL230)	Optional (JXGRIDL230)	Optional (JXGRIDL230)	
APPEARANCE				
Color appearance**	SS	SS	SS/BB	SS/WW, BB
Cooktop color**	SS	SS	SS/BB	SS/WW, BB
Cooktop surface	Deep-recessed	Deep-recessed	Deep-recessed	Deep-recessed
	SS appearance	SS appearance	SS appearance Gloss white, Gloss black	SS appearance Gloss white, Gloss black
WEIGHTS & DIMENSIONS				
Approx. shipping wt. (lbs.)	50	50	48	44
Net weight (lbs.)	44	44	42	38
Cabinet width compatibility (in.)	30	30	30	30
Overall dims. (WxHxD in inches)	30 x 5-1/2 x 21	30 x 5-1/2 x 21	30 x 5-1/2 x 21	30 x 4-3/4 x 21
Cutout dims. (WxD in inches)	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8	28-1/2 x 19-5/8
POWER/RATINGS				
Amp Rating @ 120V, 60Hz	5	5	5	5

\*A set of LP orifices is included with each cooktop for LP conversion. Factory set for natural gas.  
\*\*SS = Stainless, WW = White on white, BB = Black on black.

COUNTER INSTALLATION  
DIMENSIONS (IN INCHES)

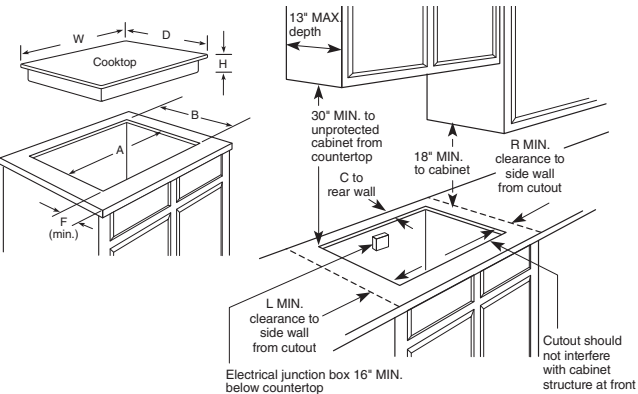

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.


DIMENSIONS (IN INCHES)

MODEL	OVERALL			CUTOUT		MINIMUM SPACING TO NEAREST COMBUSTIBLE WALL				TO EDGE OF FRONT COUNTER
	W	H*	D	A	B	C	L	R	F	
PGP9036	36	5-1/2	21	33-7/8	19-1/8	3-3/8	12	12	2-1/2	
PGP7036	36	5-1/2	21	33-7/8	19-1/8	3-3/8	12	12	2-1/2	
JGP5036	36	5-1/2	21	33-7/8	19-1/8	3-3/8	12	12	2-1/2	
PGP9030	30	5-1/2	21	28-1/2	19-5/8	2-7/8	12	12	2-1/2	
PGP7030	30	5-1/2	21	28-1/2	19-5/8	2-7/8	12	12	2-1/2	
JGP5030	30	5-1/2	21	28-1/2	19-5/8	2-7/8	12	12	2-1/2	
JGP3036	36	4-3/4	21	33-7/8	19-1/8	2-1/4	6	6	2-1/2	
JGP3030	30	4-3/4	21	28-1/2	19-5/8	2-1/4	6	6	2-1/2	


\*Allow 5-3/4" depth at rear for electrical and gas connections.  
Raised bullnose countertops may require up to 3/8" additional clearance to prevent interference with curved front.

30" BUILT-IN GAS COOKTOPS

GAS CONNECTION  
ALL MODELS



**Installation with single wall oven information:**  
Select 30" gas cooktops are approved for use over GE 27" wall ovens and warming drawers. 36" and 30" gas cooktops are approved for use over 30" wall ovens and warming drawers. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

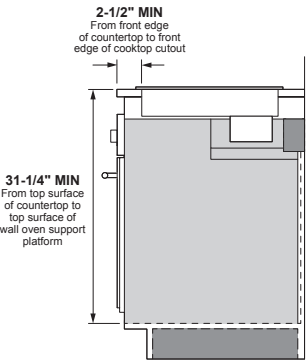

BUILT-IN COOKTOP & WALL OVEN COMBINATIONS

Find approved cooktop/wall oven installation combinations below.

		WALL OVENS						
		30" SINGLE WALL OVENS				27" SINGLE WALL OVENS		
		PTS9000	PTS7000	JTS5000	JTS3000	PKS7000	JKS5000	JKS3000
COOKTOPS	36" INDUCTION COOKTOP	PHP9036	●	●	●	●		
	30" INDUCTION COOKTOP	PHP9030	●	●	●	●	●	●
	36" ELECTRIC COOKTOPS	PP9036	●	●	●			
		PP7036	●	●	●			
		JP5036	●	●	●			
		JP3536	●	●	●			
		JP3036	●	●	●			
	30" ELECTRIC COOKTOPS	PP9030	●	●	●	●	●	●
		PP7030	●	●	●	●	●	●
		JP5030	●	●	●	●	●	●
		JP3530	●	●	●	●	●	●
		JP3030	●	●	●	●	●	●
	36" GAS COOKTOPS	PGP9036	●	●	●			
		PGP7036	●	●	●			
		JGP5536	●	●	●			
		JGP5036	●	●	●			
		JGP3036	●	●	●			
	30" GAS COOKTOPS	PGP9030	●	●	●			
		PGP7030	●	●	●			
		JGP5530	●	●	●	●	●	●
		JGP5030	●	●	●	●	●	●
		JGP3530	●	●	●	●	●	●
		JGP3030	●	●	●	●	●	●

UL\* approved cooktops over wall ovens.

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

For models available before 2019,  
please reference [geappliances.com](http://geappliances.com).

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

UNIVERSAL HOODS

	UNIVERSAL								
	UVW9361SL UVW9361BL	UVW9301SL UVW9301BL	UVW8361SL	UVW8301SL	UVC9480SL	UVC9420SL	UVC9360SL	UVC9300SL	UVC7300SL
ADA capable	● (w/Connected App)	● (w/Connected App)	● (w/UXRC1)	● (w/UXRC1)			● (w/Connected App)	● (w/Connected App)	● (w/UXRC1)
AHAM certified	●	●	●	●	●	●	●	●	●
UL certified	●	●	●	●	●	●	●	●	●
California Title 24 compliant	●	●	●	●	●	●	●	●	●
FEATURES & CONTROLS									
Control type	Electronic Touch	Electronic Touch	Electronic backlit	Electronic backlit	Electronic backlit push-button	Electronic backlit push-button	Electronic backlit push-button	Electronic backlit push-button	Electronic backlit push-button
Control location	Front	Front	Front	Front			Bottom	Bottom	Bottom
Number of fan speeds	4	4	3	3	4	4	4	4	4
Number of blowers	1	1	1	1	2	2	1	1	1
FILTERS									
Number of filters	2	2	3	3	4	4	3	3	2
Included grease filter type	Mesh	Mesh	Mesh	Mesh	Baffle	Baffle	Baffle	Baffle	Mesh
Filter cleaning	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe
LIGHTING									
Number of cooktop lights	3	3	2	2	4	4	3	3	2
Lighting control	On/Off/ Night light	On/Off/ Night light	On/Off/ Night light	On/Off/ Night light	On/Off/ Night light	On/Off/ Night light	On/Off/ Night light	On/Off/ Night light	On/Off/ Night light
Type of lighting	LED	LED	LED	LED	LED	LED	LED	LED	LED
Light bulb(s)	Included	Included	Included	LED	Included	Included	Included	Included	Included
INSTALLATION									
Mounting	Wall	Wall	Wall	Wall	Custom	Custom	Custom	Custom	Custom
Venting type	Convertible	Convertible	Convertible	Convertible	Convertible	Convertible	Convertible	Convertible	Convertible
Exhaust direction	Top	Top	Top	Top	Top	Top	Top	Top	Top
Round duct diameter (in.)	8	8	8	8	10	10	8	8	8
CFM/SONES RATINGS									
Top Round (blower boost speed)	610/~	610/~	N/A	N/A	956/14.0	956/14.0	610/~	610/~	390/~
Top Round (high speed)	290/4	290/4	350/3.1	350/3.1	591/6.0	591/6.0	288/4.9	288/4.9	302/3.7
APPEARANCE									
Color appearance*	SS TS	SS TS	SS	SS	SS	SS	SS	SS	SS
WEIGHTS & DIMENSIONS									
Approx. shipping wt. (lbs.)	84	79	76	73	121	114	52	48.5	42
Net weight (lbs.)	73	71	65	64	97	90	45	43	37
Cabinet width compatibility (in.)	36	30	36	30	48	42	34-3/8	28-3/8	30
Overall dimensions (WxHxD in inches)	40-1/6 x 29-1/8 x 22-5/6	34-1/4 x 29-1/8 x 22-5/6	40-1/6 x 29-1/8 x 22-5/6	34-1/4 x 29-1/8 x 22-5/6	46-1/2 x 18 x 21-1/4	39-3/4 x 12-1/2 x 21-1/4	37-4/5 x 16-1/2 x 22	31-8/9 x 16-1/2 x 22	20-1/2 x 9-5/8 x 11-1/4
POWER/RATINGS									
Amp Rating @ 120V	3.0	3.0	2.5	2.5	10.34	10.34	3.0	3.0	2.5
OPTIONAL ACCESSORIES									
Makeup air accessory kit – 8", 6" duct	JXMUA8	JXMUA8	JXMUA8	JXMUA8			JXMUA8	JXMUA8	JXMUA8
Duct reducer	UXCT86	UXCT86	UXCT86	UXCT86			UXCT86	UXCT86	UXCT86
10' duct cover kit			UX10DC8SLSS	UX10DC8SLSS					
12' duct cover kit	UX12DC9SLSS/BLTS	UX12DC9SLSS/BLTS	UX12DC9SLSS	UX12DC9SLSS					
14' duct cover kit	UX14DC9SLSS/BLTS	UX14DC9SLSS/BLTS	UX14DC9SLSS	UX14DC9SLSS					
Charcoal filter	UXCF91	UXCF91	UXCF91	UXCF91			UXCF91	UXCF91	UXCF91
Power cord kit	JXHC1	JXHC1	JXHC1	JXHC1	JXHC1	JXHC1	JXHC1	JXHC1	JXHC1


\*SS=Stainless, TS = Black Stainless.



**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

UNIVERSAL HOODS INSTALLATION INFORMATION




UNIVERSAL HOODS

The vent hood must be installed 24" min. above the cooking surface. For optimal performance, installing the hood more than 36" above the cooking surface is not recommended. The hood installation height above the cooking surface depends upon ceiling height. The telescopic duct cover conceals the ductwork running from the top of the hood to the ceiling.


**NOTE:** Installation height should be measured from the cooking surface to the lowest part of the hood. This hood may be installed onto a wall and vented to the outdoors, or it can be installed for recirculating operation. Parts for recirculating operation are supplied with the hood.

MODEL UVW9301

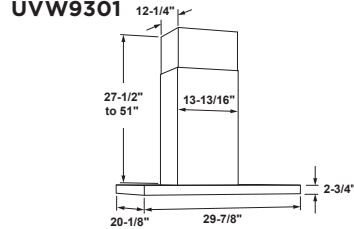


30" models require a 30"-wide opening  
\*The supplied duct cover fits 7'-7" to 10'-6" ceiling heights  
(12' ceiling height with optional high ceiling kit UX12DC93SS/UX12DC93TS)  
(14' ceiling height with optional high ceiling kit UX14DC93SS/UX14DC93TS)

MODEL UVW8361




36" models require a 36"-wide opening  
\*The supplied duct cover fits 7'-7" to 9'-6" ceiling heights  
(10' ceiling height with optional high ceiling kit UX10DC83SS)

MODEL UVW9361




36" models require a 36"-wide opening  
\*The supplied duct cover fits 7'-7" to 10'-6" ceiling heights  
(12' ceiling height with optional high ceiling kit UX12DC93SS/UX12DC93TS)  
(14' ceiling height with optional high ceiling kit UX14DC93SS/UX14DC93TS)

MODEL UVW8301




30" models require a 30"-wide opening  
\*The supplied duct cover fits 7'-7" to 9'-6" ceiling heights  
(10' ceiling height with optional high ceiling kit UX10DC83SS)


MODEL UVC9360

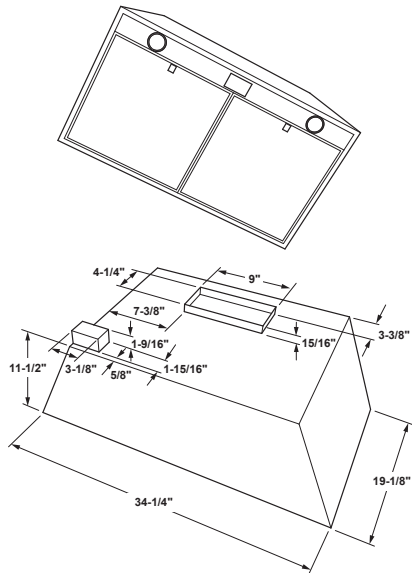

MODEL UVC9300

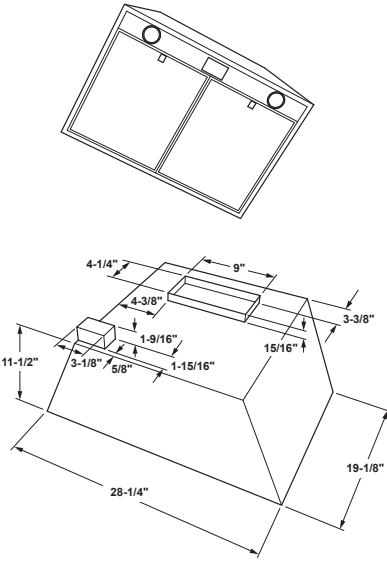

MODEL UVC7300

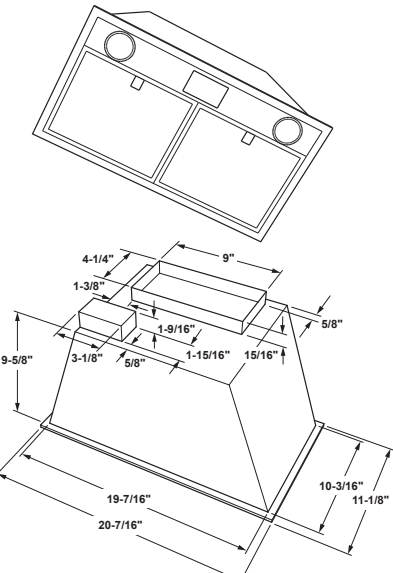

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.




48", 36" AND 30" DESIGNER/COMMERCIAL HOODS

	UNIVERSAL					GE PROFILE™		
	UVW9484SPSS	UVW9364SPSS	UVW9304SPSS	UVW8364SPSS	UVW8304SPSS	PV977N	PV976N	PV970N
AHAM certified		●	●	●	●	●	●	●
California Title 24 compliant				●	●	●	●	●
FEATURES & CONTROLS								
Control type		Backlit push-button	Backlit push-button	Push-button	Push-button	Push-button	Push-button	Push-button
Control location		Hidden	Hidden	Hidden	Hidden	Front	Front	Front
Auto-on heat-sensor feature		●	●	●	●	●	●	●
Number of fan speeds		4	4	4	4	4	4	4
Number of blowers		1	1	1	1	1	1	1
FILTERS								
Number of filters	4	2	2	2	2	1	1	1
Included grease filter type		Metal mesh	Metal mesh	Metal mesh	Metal mesh	Metal mesh/Charcoal	Metal mesh/Charcoal	Metal mesh/Charcoal
Filter cleaning	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe/Disposable	Dishwasher-safe/Disposable	Dishwasher-safe/Disposable
LIGHTING								
Number of cooktop lights	3	2	2	2	2	4	2	2
Lighting control	Off/High/Night light	Off/High/Night light	Off/High/Night light	Off/High/Night light	Off/High/Night light	Off/Low/High	Off/Low/High	Off/Low/High
Type of lighting	LED	LED	LED	LED	LED	Halogen	Halogen	Halogen
Light bulb(s)	Included	Included	Included	Included	Included	Included	Included	Included
INSTALLATION								
Mounting		Wall	Wall	Wall	Wall	Island	Wall	Wall
Venting type		Convertible	Convertible	Vented	Vented	Convertible	Convertible	Convertible
Exhaust direction		Top/horizontal	Top/horizontal	Top	Top	Top	Top	Top
Round duct diameter (in.)	10	8	8	8	8	8	8	8
Maximum equivalent duct length (ft.)				100	100	100	100	100
CFM/SONES RATINGS								
Top round (high speed)		590/7.5	590/7.5	590/9.0	590/9.0	450/7.0	450/7.0	450/7.0
Top round (working speed)		160/0.4	160/0.4	160/3.0	160/3.0	210/1.5	210/1.5	210/1.5
APPEARANCE								
Color appearance*	SS	SS	SS	SS	SS	SS	SS	SS
WEIGHTS & DIMENSIONS								
Approx. shipping wt. (lbs.)	130	77	68	77	68	110	75	68
Net weight (lbs.)	120	54	54	60	54	100	68	60
Cabinet width compatibility (in.)	48	36	30	36	30	36	36	30
Overall dimensions (WxHxD in inches)	48 x 18 x 25	36 x 10 x 21	30 x 10 x 21	36 x 10 x 21	30 x 10 x 21	35-7/8 x 3-1/8 x 27-5/8	35-7/8 x 3-1/8 x 19-3/4	29-7/8 x 2-1/2 x 19-3/4
POWER/RATINGS								
Amp Rating @ 120V	5.3	3.90	3.90	3.90	3.90	4.10	4.10	4.10
OPTIONAL ACCESSORIES								
Makeup air accessory kit— 8"/6" duct						JXMUA8/JXMUA6	JXMUA8/JXMUA6	JXMUA8/JXMUA6
15" Cabinet spacer				JXS56SS	JXS50SS			
Duct cover kit				UXCH2NSS	UXCH2NSS			
8" duct cover	CX8DC9SPSS	CX8DC9SPSS	CX8DC9SPSS	CX8DC9SPSS	CX8DC9SPSS			
10' duct cover	CX10DC9SPSS	CX10DC9SPSS	CX10DC9SPSS	CX10DC9SPSS	CX10DC9SPSS			
12' duct cover	CX12DC9SPSS	CX12DC9SPSS	CX12DC9SPSS	CX12DC9SPSS	CX12DC9SPSS			

\*SS = Stainless.

UVW9304, UVW9364

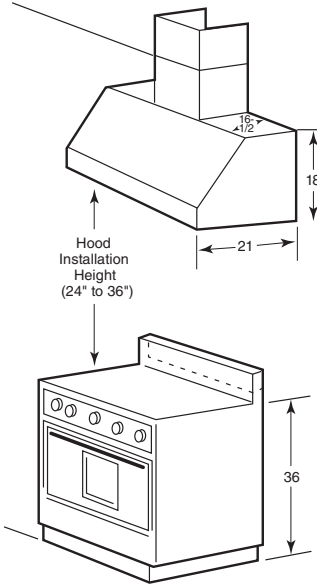


INSTALLED ABOVE  
A RANGE  
(shown with optional  
chimney kit)

OPTIONAL KITS FOR 36" AND 30"  
DESIGNER/COMMERCIAL HOODS UVW8304,  
UVW8364, UVW9304, UVW9364

UXCH2NSS—Stainless chimney extension kit  
JXMUA8—Makeup air accessory kit for 8" inlet duct  
JXMUA6—Makeup air accessory kit for 6" inlet duct


UVW9304, UVW9364

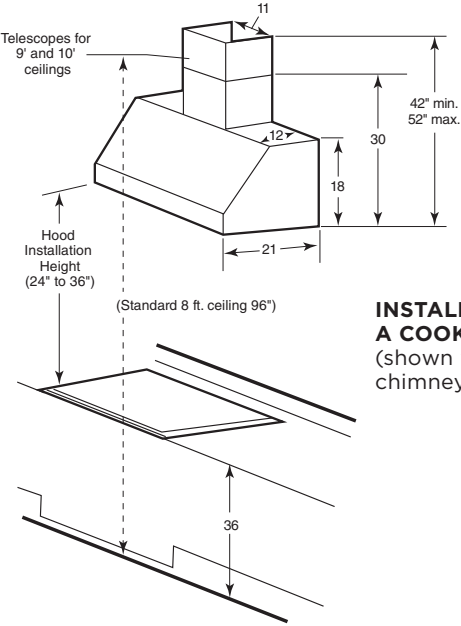


INSTALLED ABOVE  
A COOKTOP  
(shown with optional  
chimney kit)

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

UVW8304

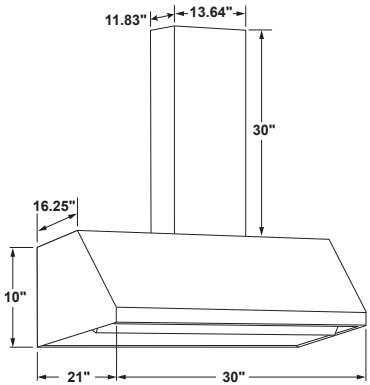


ISLAND MOUNT  
PV977

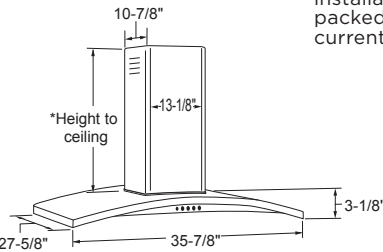


\*The supplied duct cover fits 7'11" to 10'4" ceiling heights  
(10'9" in recirculation mode).

WALL MOUNT  
PV976

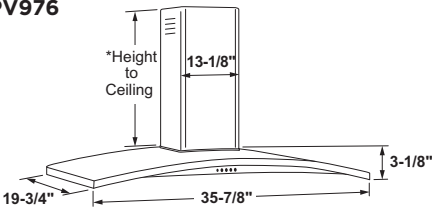

\*The supplied duct cover fits 7' 11" to 10' 2" ceiling heights  
(10' 6" in recirculation mode)

PV970

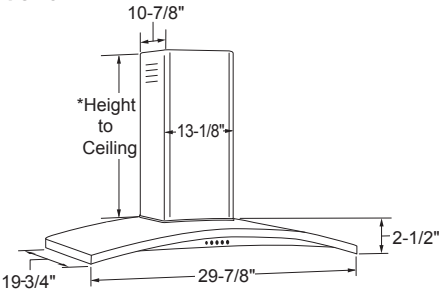



30" models require a 30"-wide opening

\*The supplied duct cover fits 7'11" to 10'2" ceiling heights  
(10'6" in recirculation mode).

**Note:** Vent hoods should be of the same or greater  
width of the cooking surface.

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.


UVW8364

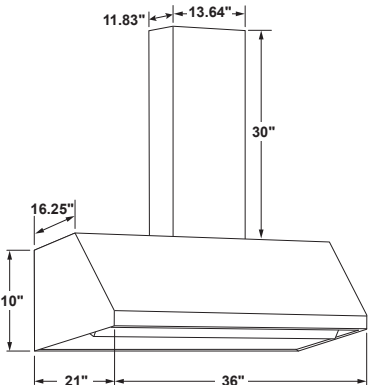

**Note:** Typical overhead cabinets  
are 12" deep. For cabinets of  
greater depth, place spacer  
of non-combustible material  
behind hood, or use the  
15" cabinet spacer optional  
accessory—see chart for details.

\*Exact installation  
height depends  
on ceiling height.

**NOTE:** Installation height should be measured from  
the cooking surface to the bottom of the outer glass  
portion of the hood. This hood must be installed  
24" min. above the cooking surface. The cooking  
surface should be at least 36" above the floor. This  
hood may be vented to the outdoors, or it can be  
installed for recirculating operation.



The vent hood must be installed 24" min.  
above the cooking surface. The hood installation  
height above the cooking surface depends upon  
ceiling height. The telescopic duct cover conceals  
the ductwork running from the top of the hood to  
the ceiling. The supplied duct cover is sized to  
reach 8' to 10' ceiling heights.

**NOTE:** Installation height should be measured  
from the cooking surface to the lowest part  
of the hood. This hood may be installed onto a wall  
and vented to the outdoors, or it can be installed  
for recirculating operation. All necessary parts for  
recirculating operation are supplied with the hood.  
No kits are required.




Listed by  
Underwriters  
Laboratories

36" AND 30" DESIGNER HOODS

	GE	
	JVW5361SJ JVW5361EJ* JVW5361FJ	JVW5301SJ JVW5301BJ JVW5301EJ* JVW5301FJ
ADA capable	●	●
AHAM certified	●	●
California Title 24 compliant	●	●
FEATURES & CONTROLS		
Control type	Electronic backlit	Electronic backlit
Control location	Front	Front
Number of fan speeds	4	4
Number of blowers	1	1
FILTERS		
Number of filters	3	2
Included grease filter type	Metal mesh	Metal mesh
Filter cleaning	Dishwasher-safe	Dishwasher-safe
LIGHTING		
Number of cooktop lights	2	2
Lighting control	On/Off/Night light	On/Off/Night light
Type of lighting	Halogen	Halogen
Light bulb(s)	Included	Included
INSTALLATION		
Mounting	Wall	Wall
Venting type	Convertible	Convertible
Exhaust direction	Top	Top
Round duct diameter (in.)	6	6
CFM/SONES RATINGS		
Top Round (boost speed)	350/6.6	350/6.6
Top Round (high speed)	340/5.1	340/5.1
Top Round (working speed)	150/1.0	150/1.0
APPEARANCE		
Color appearance**	SS/ES/DS	SS/TS/ES/DS
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	37	35
Net weight (lbs.)	20	16
Cabinet width compatibility (in.)	36	30
Overall dimensions (WxHxD in inches)	36 x 9-3/4 x 18-1/2	30 x 9-3/4 x 18-1/2
POWER/RATINGS		
Amp Rating @ 120V	2.5	2.5
OPTIONAL ACCESSORIES		
Makeup air accessory kit—8"/6" duct	JJXMUA6	JJXMUA6
10 (ft.) ceiling duct cover kit	UXDC53SS/TS/ES/DS	UXDC53SS/TS/ES/DS
Charcoal filter	JXCF72	JXCF72
Remote control	UXRC70	UXRC70


\*10 ft. duct cover included in box.  
\*\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate.

JVW5361

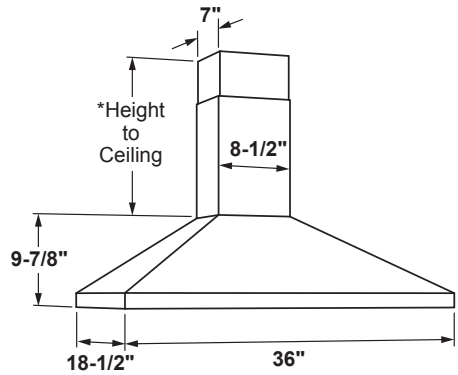


36" models require a 36"-wide opening  
\*The supplied duct cover fits 7'-4" to 9'-0" ceiling heights (10' with optional high ceiling kit UXDC72 and UX10DC53. See install instructions for specific details.)

JVW5301

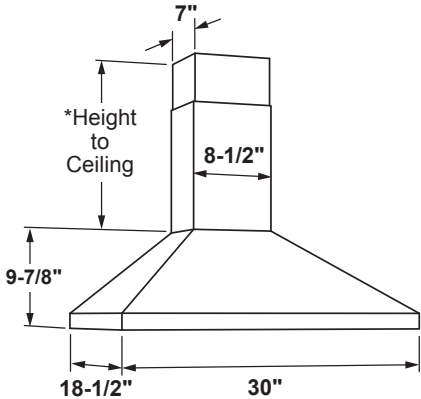

30" models require a 30"-wide opening  
\*The supplied duct cover fits 7'-4" to 9'-0" ceiling heights (10' with optional high ceiling kit UXDC72 and UX10DC53. See install instructions for specific details.)

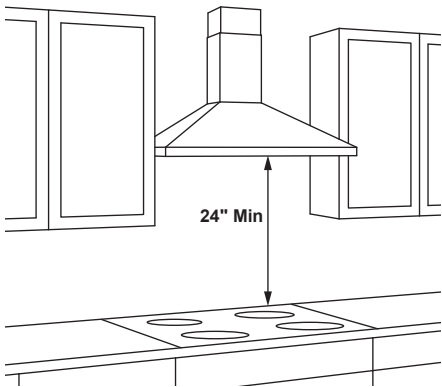

The vent hood must be installed 24" min. above the cooking surface. For optimal performance, installing the hood more than 38" above the cooking surface is not recommended. The hood installation height above the cooking surface depends upon ceiling height. The telescopic duct cover conceals the ductwork running from the top of the hood to the ceiling.

**NOTE:** Installation height should be measured from the cooking surface to the lowest part of the hood. This hood may be installed onto a wall and vented to the outdoors, or it can be installed for recirculating operation. Parts for recirculating operation are supplied with the hood. However, when installed for recirculating, the optional charcoal filter UXCF72 will need to be purchased separately.




Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

36" AND 30" TELESCOPIC DOWNDRAFT SYSTEMS

	UNIVERSAL	
	UVD6361SP UVD6361DP	UVD6301SP UVD6301DP
ADA compliant	●	●
AHAM certified	●	●
California Title 24 compliant	●	●
FEATURES & CONTROLS		
Control type	Electronic push-button	Electronic push-button
Control location	Remote	Remote
Number of fan speeds		
Number of blowers	1	1
FILTERS		
Number of filters	2	2
Included grease filter type	Metal mesh	Metal mesh
Filter cleaning	Soap & water	Soap & water
INSTALLATION		
Venting type	Vented	Vented
Exhaust direction	Downdraft	Downdraft
Rectangular duct size (in.)	3-1/4 x 10	3-1/4 x 10
Round duct diameter (in.)	6	6
Maximum equivalent duct length (ft.)	100	100
Optional remote blower mount	Capable	Capable
CFM/SONES RATINGS		
Downdraft (high speed)	500/9.0	500/9.0
Downdraft (working speed)	200/2.5	200/2.5
APPEARANCE		
Color appearance*	SS BB	SS BB
Top cover plate*	SS Black	SS Black
Telescopic assembly*	SS	SS
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	74	69
Net weight (lbs.)	59	54
Cabinet width compatibility (in.)	36	30
Overall dimensions (WxHxD in inches)	36 x 27 x 9-1/2	30 x 27 x 9-1/2
Telescoping height (in.)	8.5	8.5
POWER/RATINGS		
Amp rating @ 120V	4.00	4.00

\*SS = Stainless, BB = Black on black.  
**Note:** Approved for use with GE Profile™ and GE electric and sealed burner gas cooktops.

OVERALL DIMENSIONS (IN INCHES)  
MODELS UVD6301, UVD6361

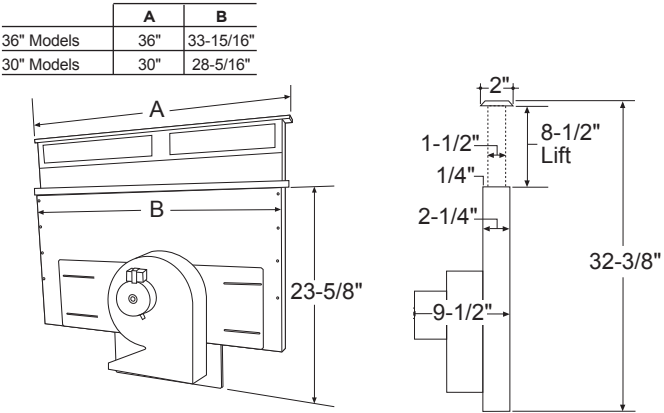

Approved for use with the following GE Profile and GE cooktops: 36" and 30" electric models, 36" and 30" gas sealed burner models and 36" and 30" Profile induction models. Before installing, consult installation instructions packed with product for current dimensional data.  
**Not approved for use with standard burner gas cooktops.**  
**Note:** The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered.  
**Note:** Dimensions shown are for reference only. Before cutting out countertop, refer to instructions packed with downdraft and cooktop.  
**Note: Installation in cabinets/countertops against the wall will not be possible in most applications. Against-the-wall installations are limited to dimension requirements. Refer to installation instructions packed with product for further details.**  
**JXRB67 Indoor Remote Kit.** Optional service part may be ordered for installation of motor and blower assembly in an indoor remote location.  
**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.  
The vent is designed for a 3-1/4" x 10" duct size. A 3-1/4" x 10" rectangular to 6" round transition duct is available at your local building supply store.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

See page 294 for warranty information.




36" AND 30" UNDER-THE-CABINET HOODS

	GE PROFILE™		GE						
	PVX7360SJ	PVX7300SJ	JVX5305SJ JVX5305DJ	JVX5360SJ JVX5360DJ	JVX5300SJ JVX5300EJ JVX5300DJ	JVX3300SJ JVX3300EJ JVX3300DJ	JV338H	JN328K JN327H	JVX3240SJ JVX3240DJ
ADA capable	●	●	●	●	●	●			●
ENERGY STAR® certified			●						
AHAM certified	●	●	●	●	●	●	●		●
California Title 24 compliant	●	●	●	●	●				
FEATURES & CONTROLS									
Control type	Glass Touch	Glass Touch	Rocker Switch	Electronic Backlit	Electronic Backlit	Rocker Switch	Rocker Switch	Rocker Switch	Rocker Switch
Control location	Front	Front	Front	Front	Front	Front	Front	Front	Front
Chef Connect	Yes	Yes							
Number of fan speeds	4	4	2	4	4	2	2	2	2
Number of blowers	1	1	1	1	1	1	1	1	1
FILTERS									
Number of filters	2	2	2	2	2	1	1	1	1
Included grease filter type	Dual full-length stainless mesh	Dual full-length stainless mesh	Dual full-length metal mesh	Dual full-length metal mesh	Dual full-length metal mesh	Single metal mesh	Metal mesh	Charcoal	Single metal mesh
Filter cleaning	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Dishwasher-safe	Hand wash	Disposable	Dishwasher-safe
LIGHTING									
Number of cooktop lights	2	2	2	2	2	1	1	1	1
Lighting control	On/Off/ Night light	On/Off/ Night light	On/Off	On/Off/ Night light	On/Off/ Night light	On/Off	On/Off	On/Off	On/Off
Type of lighting	Dual LED	Dual LED	Dual LED	Dual halogen	Dual halogen	Incandescent	Incandescent	Incandescent	Incandescent
Light bulb(s)	Included	Included	Included	Included	Included	Included	Not included	Not included	Included
INSTALLATION									
Mounting	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet	Under-the-cabinet
Venting type	Convertible	Convertible	Convertible	Convertible	Convertible	Convertible	Vented	Recirculating	Convertible
Exhaust direction	Top/Rear	Top/Rear	Top/Rear	Top/Rear	Top/Rear	Top/Rear	Top/Rear	Front	Top
Round duct diameter (in.)	7	7	7	7	7	7	7		7
CFM/SONES RATINGS									
Top Round (boost speed)	390/8.0	390/8.0		310/7.0	310/7.0				
Top Round (high speed)	310/6.0	310/6.0	270/4.5	260/5.5	260/5.5	200/6.5	160/7.0		200/6.5
Top Round (medium speed)	210/4.0	210/4.0		170/3.0	170/3.0				
Top Round (working speed)	70/1.5	70/1.5	100/1.5	60/1.0	60/1.0	130/5.0			130/5.0
APPEARANCE									
Color appearance*	SS	SS	SS WW, BB	SS WW, BB	SS TS ES WW, BB	SS ES WW, BB	WW, BB	SA WW, CC, BB	SS WW
WEIGHTS & DIMENSIONS									
Approx. shipping wt. (lbs.)	30	28	27	28	26	23	19	19	21
Net weight (lbs.)	23	21	20	21	19	17	19	19	15
Cabinet width compatibility (in.)	36	30	30	36	30	30	30	30	24
Overall dimensions (WxHxD in inches)	35-7/8 x 5-1/2 x 20	29-7/8 x 5-1/2 x 20	29-7/8 x 5-1/2 x 20	35-7/8 x 5-1/2 x 20	29-7/8 x 5-1/2 x 20	29-7/8 x 5-1/2 x 20	29-7/8 x 5-1/2 x 17-1/2	29-7/8 x 5-1/2 x 17-1/2	23-7/8 x 5-1/2 x 20
POWER/RATINGS									
Amp Rating @120V	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
OPTIONAL ACCESSORIES									
Remote control	UXRC70	UXRC70		UXRC70	UXRC70				
Cabinet spacer	JXS56SS	JXS50SS	JXS50SS	JXS56SS	JXS50SS	JXS50SS			
Power cord kit	JXHC1	JXHC1	JXHC1	JXHC1	JXHC1	JXHC1	JXCH1	JXCH1	JXHC1
Damper accessory (round)	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22		JXDA22


\*SS=Stainless, TS = Black Stainless, DS=Black Slate, ES=Slate, SA=Silver, WW=White, CC=Bisque, BB=Black.

HOOD INSTALLATION DIMENSIONS (IN INCHES)

MODELS PVX7360, JVX5365, JVX5360




MODELS PVX7300, JVX5305, JVX5300, JVX3300




MODEL JV338H

Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.




MODEL JV338H


Exhaust outlet connects to 7" diameter duct. Vent top only. Round damper accessory JXDA22 available at additional cost.




MODEL JN328, JN327H



MODEL JVX3240



OVERALL DIMENSIONS (IN INCHES)



MODEL	A	B	C	D
PVX7360	5-1/2	35-7/8	20	12
PVX7300	5-1/2	29-7/8	20	12
JVX5365	5-1/2	35-7/8	20	12
JVX5305	5-1/2	29-7/8	20	12
JVX5360	5-1/2	35-7/8	20	12
JVX5300	5-1/2	29-7/8	20	12
JVX3300	5-1/2	29-7/8	20	12
JV338	5-1/2	29-7/8	17-1/2	12
JN328/JN327	5-1/2	29-7/8	17-1/2	12
JVX3240	5-1/2	23-7/8	20	12



**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

**JXHC1 Cord Kit:** Allows a receptacle in the cabinet over the range to accommodate either an over-the-range microwave oven or a standard hood.


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

30" DROP-IN ELECTRIC RANGES


	GE
UFAS/ADA compliant	●/●
FEATURES	
Capacity (cu. ft.) upper/lower	4.4
Cleaning system	Self-clean
Cooking technology	Traditional
CONTROLS	
Sabbath mode	●
Control lock capability	●
Electronic oven controls	●
Delay bake	●
Digital temperature display	●
Hot surface lights	4
Self-clean latch	Auto
COOKTOP	
Element—left front	8" 2,000W
Element—left rear	8" 2,000W
Element—right front	9" 6" 3,000W Power Boil
Element—right rear	6" 1,200W
Melt	●
OVEN	
Audible preheat signal	●
Bake element	6-pass
Broil element	6-pass
Dual-element bake	●
Interior oven light	1 incandescent
Oven racks	2
APPEARANCE	
Ceramic-glass cooktop	Black Patterned White, Black
Color appearance*	SS with gray WW, BB
Handle color*	SS CM
Handle design	Designer-style
Knobs—weighted	●
Knobs—color*	SS CM
Oven interior	Black
WEIGHTS & DIMENSIONS	
Approx. shipping wt. (lbs.)	184 179
Overall oven interior dimensions (WxHxD in inches)	24 x 17-1/2 x 18-1/4
POWER/RATINGS	
Bake wattage	3,410W
Broil wattage	3,420W
Amp rating 240V/208V	40
KW rating 240V/208V	11.9/8.9

\*SS = Stainless, WW = White with white glass door, BB = Black with black glass door, CM = Color-matched.

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

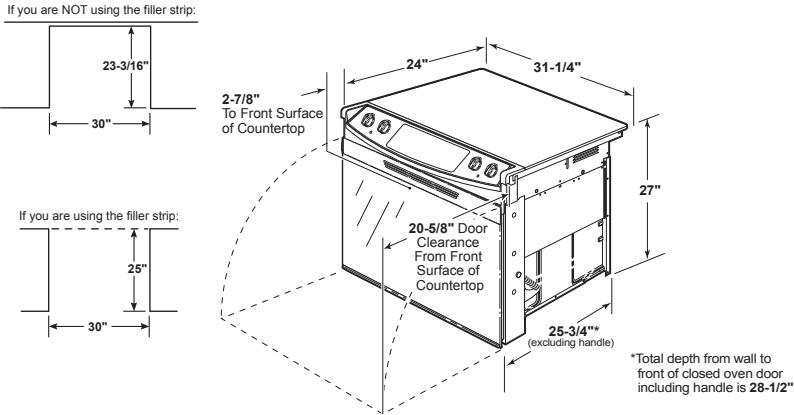

If you are NOT using the filler strip:

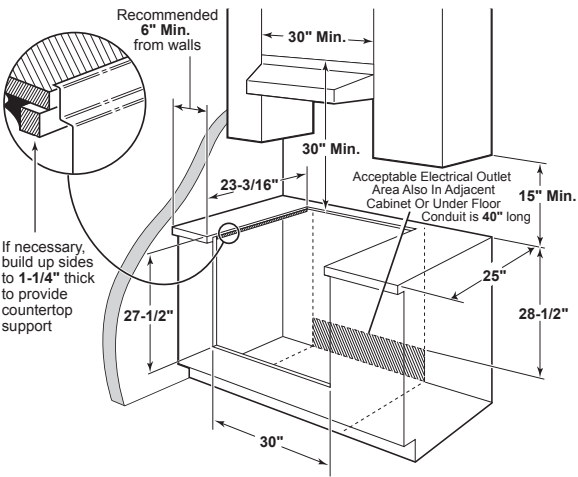

Optional rear filler trim kit

(Available at additional cost)

Fills gap between cooktop and wall when unit is installed in 30" free-standing cutout  
WB07T10680—Stainless/Black models  
WB07T10681—White models  
WB07T10682—Bisque models

**Note:** Cabinets installed adjacent to drop-in electric ranges must have an adhesion spec of at least a 194°F temperature rating.

**Note:** Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Note:** To reduce possibility of scorching the side walls above the countertop when no load is present on burners, it is recommended that a minimum 6" spacing from adjacent side wall be allowed for possible extended high-heat element operation.

**Note:** Drop-in configuration is also approved for 34" countertop heights.

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

**IMPORTANT:** 30" DROP-IN RANGES ARE DESIGNED TO HANG FROM THE COUNTERTOP. THEY DO NOT REST ON THE FLOOR. FOR INSTALLATION ALTERNATIVES, REFER TO INSTALLATION INSTRUCTIONS PACKED WITH PRODUCT.

Drop-in ranges are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

## 27" DROP-IN ELECTRIC RANGE

	<b>GE</b>
UFAS/ADA compliant	●
California Prop 65	●
<b>FEATURES</b>	
Capacity (cu. ft.) upper/lower	3.0
Cleaning system	Self-clean
Cooking technology	Traditional
<b>CONTROLS</b>	
Sabbath mode	●
Electronic oven controls	●
Delay bake	●
Digital temperature display	●
Self-clean latch	●
<b>COOKTOP</b>	
Element—left front	8" 2,600W 5-turn
Element—left rear	6" 1,500W 4-turn
Element—right front	6" 1,500W 4-turn
Element—right rear	6" 1,500W 4-turn
Chrome drip bowls	●
<b>OVEN</b>	
Audible preheat signal	●
Bake element	4-pass
Broil element	4-pass
Interior oven light	1 incandescent
Oven racks	2
<b>APPEARANCE</b>	
Color appearance*	WW, BB
Handle color*	CM
Handle design	D-shaped
Knobs—color*	CM
Oven door with window	●
Oven interior	Gloss black
<b>WEIGHTS &amp; DIMENSIONS</b>	
Approx. shipping wt. (lbs.)	124
Overall oven interior dimensions WxHxD (in inches)	19 x 15 x 18
<b>POWER/RATINGS</b>	
Bake wattage	2,000W
Broil wattage	3,400W
Amp rating 240V/208V	40
KW rating 240V/208V	10.6/8.0


\*WW = White with white glass door, BB = Black with black glass door, CM = Color-matched.

## DIMENSIONS AND INSTALLATION INFORMATION

Important: This range is designed to hang from the countertop. It does not rest on the floor.

If necessary, build up sides to 1-1/2" thick to provide screw anchor surface and countertop support

These screws are anti-tip devices and must be installed in the front and rear

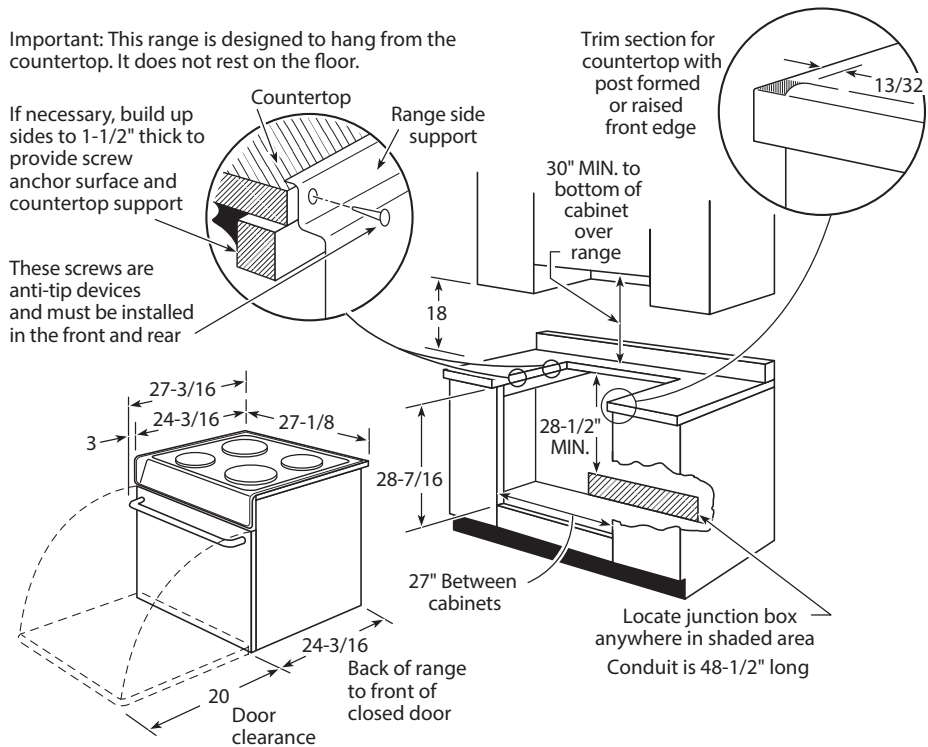


**Note:** All 27" drop-in electric ranges conform to UL requirements for minimum spacing between range and side wall below countertop.

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

## COUNTERTOP CUTOUT DIMENSIONS

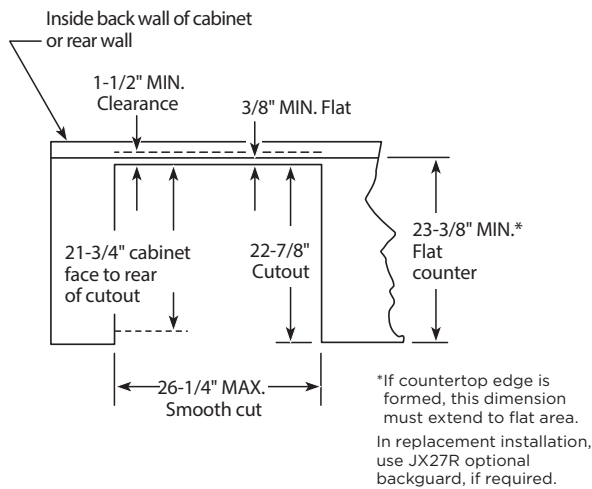

A black silhouette of a person pushing a large, rectangular box. The person is on the left, leaning forward and pushing the box towards the right. The box is tilted slightly to the right. The entire scene is set against a white background.

All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

Listed by  
Underwriters  
Laboratories

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

## 30" SLIDE-IN ELECTRIC RANGES

	GE PROFILE™				GE		
	PHS93XYP	INDUCTION PHS93OYP PHS93OBP	PSS93YP PSS93BP	PS960YP	JSS86SP	JS760SP JS760EP JS760FP JS760DP	JS645SL JS645EL JS645DL
UFAS/ADA compliant	●	●	●	●	●	●	●
California Prop 65	●	●	●	●	●	●	●
FEATURES							
Capacity (cu. ft.) upper/lower	5.3	5.3	5.3	2.2/4.4	5.3	5.3	5.3
Cleaning system	Steam Clean	Self-clean with Steam Clean option	Steam Clean	Self-clean with Steam Clean option	Steam Clean	Self-clean with Steam Clean option	Self-clean
Cooking technology	True Convection with Precise Air	True Convection with Precise Air	True Convection with Precise Air	Upper: Traditional Lower: True Convection with Precise Air	True Convection	Convection	Traditional
CONTROLS							
Sabbath mode	●	●	●	●	●	●	●
Sabbath mode—OU & CRC*						●	
Control lock capability	●	●	●	●	●		●
Electronic oven controls	●	●	●	●	●	●	●
Delay bake	●	●	●	●	●	●	●
Digital temperature display	●	●	●	●	●	●	●
Hot surface lights	●	●	●	●	●	●	●
WiFi Connect**	●	●	●	●		●	
Upgradeable feature downloads	●***	●***	●***	●***		●***	
Chef Connect	●	●	●	●			
Guided Cooking	●***	●***					
Sous vide	●***	●***					
COOKTOP							
Element—left front	8" 2,500W Sync Element	8" 2,500W Sync Element	8"/5" 1,900W Bridge	8"/5" 1,900W Sync Element	9"/6" 3,100W Power Boil	9"/6" 3,100W Power Boil	9"/6" 3,100W Power Boil
Element—left rear	8" 2,500W Sync Element	8" 2,500W Sync Element	8" 2,000W Bridge	8" 2,000W Sync Burner	6" 1,200W	6" 1,200W	6" 1,200W
Element—right front	11" 3,700W Power Boil	11" 3,700W Power Boil	12"/9"/6" 3,600W Power Boil	12"/9"/6" 3,000W Power Boil	12"/9" 3,000W	12"/9" 3,000W	9"/6" 3,100W Power Boil
Element—right rear	6" 1,800W	6" 1,800W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W
Element—center Melt	6" 100W Warming Zone ●	6" 100W Warming Zone ●	6" 100W Warming Zone ●	6" 100W Warming Zone ●	6" 100W Warming Zone ●	6" 100W Warming Zone ●	●
OVEN							
Audible preheat signal	●	●	●	●	●	●	●
Auto Recipe Conversion	●	●	●	●	●	●	
True Convection with Precise Air	●	●	●	●	●		
Convection bake	●	●	●	●	●	●	
Convection roast	●***	●***	●***	●***	●	●	
Bake element	Hidden	Hidden	Hidden	Hidden	Hidden	Hidden	4-pass
Broil element	●	8-pass	●	8-pass	8-pass	8-pass	6-pass
Drawer	Storage	Storage	Storage			Storage	Storage
Fast preheat	●	●	●	●	●	●	
Interior oven light	1 halogen	1 halogen	1 halogen	Upper: 1 halogen Lower: 1 halogen	1 halogen	1 halogen	1 Incandescent
Temperature probe	●	●	●	●			
No-preheat air fry	●***	●***	●***	●***	●	●	
No-preheat modes†	6***	6**	6***	—/6***			
Proof modes	●	●	●	●			
Self-clean oven racks	●	●	●	●			
Oven racks	3 heavy-duty	3 heavy-duty	3 heavy-duty	3 heavy-duty	3	2	2
APPEARANCE							
Ceramic-glass cooktop	●	●	●	●	●	●	●
Color appearance‡†	FS	FS TS	FS TS	FS	SS	SS ES DS WW	SS ES WW
Handle color††	SS	FS TS	FS TS	SS	SS	SS SS TS CM	SS SS CM
Knobs—weighted							●
Knobs—color††	SS	FS TS	FS TS	SS	SS	SS TS CM	SS SS CM
Oven interior	Black	Black	Black	Black	Black	Black	Black
WEIGHTS & DIMENSIONS							
Approx. shipping wt. (lbs.)	221	221	221	259	191	200	178
Overall oven interior dimensions (WxHxD in inches)	24-1/8 x 19-1/2 x 19-3/8	24-1/8 x 19-1/2 x 19-3/8	24-1/8 x 19-1/2 x 19-3/8	Upper: 24 x 8-7/8 x 18 Lower: 24 x 17-1/2 x 18-1/4	Upper: 24 x 8-7/8 x 18 Lower: 24 x 17-1/2 x 18-1/4	24-1/8 x 19-1/2 x 19-3/8	24-1/8 x 19-1/4 x 19-1/2
POWER/RATINGS							
Bake wattage	2,850W	2,850W	2,850W	Upper: 2,650W Lower: 2,650W	2,650W upper/ 2,650W lower	2,850W	2,585W
Broil wattage	3,800W	4,000W	3,800W	Upper: 3,000W Lower: 3,600W	3,000W upper/ 3,600W lower	4,000W	3,410W
Convection wattage	2,500W	2,500W	2,500W	2,500W	1,500W	2,500W	
Amp rating 240V/208V	40	40	40	40	40	40	40
KW rating 240V/208V	115.5/11.6	12.5/10.4	115.5/11.6	16.0/12.0	13.6/10.2	13.6/10.2	12.1/9.1
ACCESSORIES							
Trim kit	JXFILLR1BB	JXFILLR1BB JXFILLR1DD	JXFILLR1BB JXFILLR1BB	JXFILLR1BB	JXFILLR1BB	JXFILLR1BB JXFILLR1DD JXFILLR1BB	JXFILLR1BB JXFILLR1BB J

\*See use and care manual for required Shabbos Keeper available at additional cost.

\*\*WiFi router required.

\*\*\*WiFi-enabled feature

<sup>†</sup>No-preheat modes include baked goods, frozen pizza single rack, frozen pizza multi rack, frozen snack single rack, frozen snack multi rack and air fry.

††SS = Stainless, FS = Fingerprint Resistant Stainless, TS = Black stainless, ES = Slate, DS = Black Slate, WW = White, CM = Color-matched.


See page 294 for warranty information.

geappliances.com 347




30" SLIDE-IN ELECTRIC RANGES


DIMENSIONS AND INSTALLATION INFORMATION  
MODELS PS960, PSS93, PHS93X, PHS930, JS760, JSS86, JS645

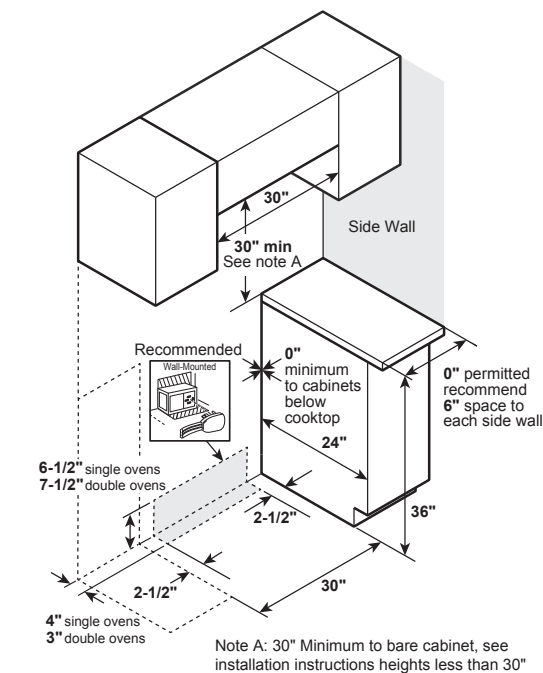

MODELS PHS93X, PHS930, JS760, JS645

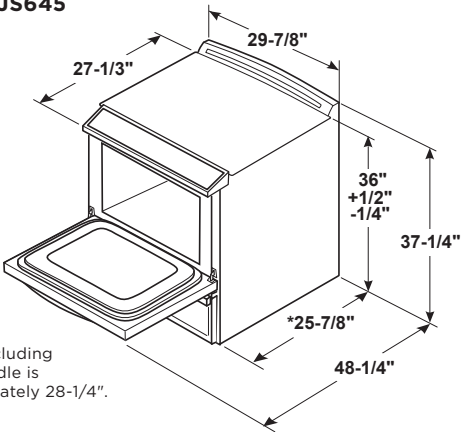

MODEL PS960 , JSS86

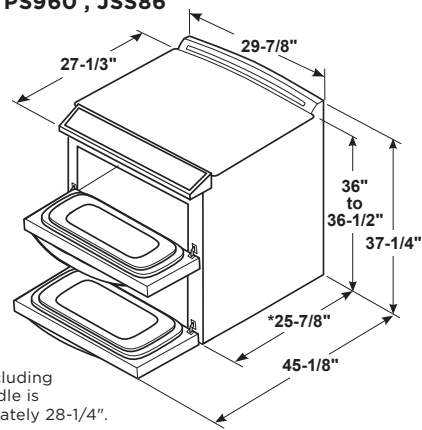

All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


30" SLIDE-IN GAS RANGES

	GE PROFILE™			GE			
	PGS960YP	P2S930YP	PGS930YP PGS930BP	JGSS86SP	JGS760SP JGS760EP JGS760FP JGS760DP	JGSS66SEL JGSS66EEL	JGSS61SP
UFAS/ADA compliant California Prop 65	● ●	● ●	● ●	● ●	● ●	● ●	● ●
FEATURES							
Capacity (upper/lower)	2.4/4.3	5.7	5.6	6.7	5.6	5.3	5.3
Cleaning system	Self-clean with Steam Clean option	Self-clean with Steam Clean option	Self-clean with Steam Clean option	Steam Clean	Self-clean with Steam Clean option	Steam Clean	Steam Clean
Cooking technology	Upper: Traditional Lower: Convection	Convection	Convection	Upper: Traditional Lower: Convection	Convection	Traditional	Traditional
CONTROLS							
Sabbath mode	●	●	●	●	●	●	●
Sabbath mode—OU & CRC*	●	●	●	●	●	●	●
Control lock capability	●	●	●	●	●	●	●
Electronic oven controls	Glass touch	Glass touch	Glass touch	●	Electronic	Electronic	Electronic
Delay bake	●	●	●	●	●	●	●
Digital temperature display	●	●	●	●	●	●	●
Electronic clock & timer	●	●	●	●	●	●	●
Ignition	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Self-clean latch	Auto	Auto	Auto	●	Auto	●	●
WiFi Connect**	●	●	●	●	●	●	●
Upgradeable feature downloads Chef Connect	●***	●***	●***	●	●***	●	●
COOKTOP							
Burner—left front	21,000 BTU Tri-ring	21,000 BTU Tri-ring	21,000 BTU Tri-ring	18,000 BTU Power Boil	18,000 BTU Power Boil	15,000 BTU Power Boil	15,000 BTU Power Boil
Burner—left rear	5,000 BTU Simmer	5,000 BTU Simmer	5,000 BTU Simmer	5,000 BTU Simmer	5,000 BTU Simmer	5,000 BTU Simmer	5,000 BTU Simmer
Burner—right front	15,000 BTU Power Boil	15,000 BTU Power Boil	15,000 BTU Power Boil	15,000 BTU	15,000 BTU Power Boil	15,000 BTU Power Boil	15,000 BTU Power Boil
Burner—right rear	9,500 BTU	9,500 BTU	9,500 BTU	9,500 BTU	9,500 BTU	9,500 BTU	9,500 BTU
Burner—center	9,500 BTU dual oval	9,500 BTU dual oval	9,500 BTU dual oval	10,000 BTU oval	10,000 BTU oval	10,000 BTU oval	10,000 BTU oval
Cooktop burners	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed
Deep-recessed cooktop	●	●	●	●	●	●	●
Griddle/grill	Reversible integrated griddle/grill	Reversible integrated griddle/grill	Reversible integrated griddle/grill	Non-stick cast-iron griddle	Non-stick griddle	Non-stick griddle	Non-stick griddle
OVEN							
Audible preheat signal	●	●	●	●	●	●	●
Auto Recipe Conversion	●	●	●	●	●	●	●
True Convection with Precise Air	●	●	●	●	●	●	●
Convection bake	●	●	●	●	●	●	●
Convection roast	●***	●***	●***	●	●	●	●
Drawer	●	Storage	Storage	●	Storage	Storage	Storage
In-oven broiling	●	●	●	●	●	●	●
Interior oven light	●	●	●	●	●	●	●
Temperature probe	●	●	●	●	●	●	●
No-preheat air fry	●***	●***	●***	●	●	●	●
Proof mode	Lower oven	●	●	●	●	●	●
No-preheat modes†	3/6***	6***	6***	●	●	●	●
Self-clean oven racks	●	●	●	●	●	●	●
Oven racks	3 heavy-duty	3 heavy-duty	3 heavy-duty	2	3	2	2
APPEARANCE							
Color appearance††	FS	FS	FS/TS	SS	SS/ES/DS/WW	SS/ES	SS
Control panel appearance††	SS	SS	SS/TS	SS	SS/ES/DS/WW	SS/ES	SS
Cooktop††	SS	SS	SS/DD	SS	SS/DD/DD/CM	DD/DD	DD
Grates	Black matte edge-to-edge	Black matte edge-to-edge	Black matte edge-to-edge	Black matte continuous	Black matte continuous	Black matte continuous	Black matte continuous
Grate material	Cast iron	Cast iron	Cast iron	Cast iron	Cast iron	Cast iron	Cast iron
Handle color††	SS	SS	SS/TS	SS	SS/SS/TS/CM	SS/SS	SS
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Knobs—color††	SS	SS	SS/TS	SS	SS/SS/TS/CM	SS/SS	SS
Oven interior	Black	Black	Black	Black	Black	Gray	Gray
WEIGHTS & DIMENSIONS							
Approx. shipping wt. (lbs.)	291	256	244	291	244	214	214
Overall oven interior dimensions (WxHxD in inches)	Upper: 24 x 9-1/2 x 19-1/8; Lower: 24 x 15 x 20-5/8	24 x 19 x 20-5/8	24 x 19-1/2 x 20-5/8	24 x 19-1/2 x 19-1/2	24 x 19-1/2 x 20-5/8	24 x 19 x 19	24 x 19-1/2 x 19-1/2
POWER/RATINGS							
Bake (000's BTU) Nat./LP	Upper: 7.0/7.0 Lower: 14.0/13.5	2,850W	16.0/16.0	Upper: 7.0/7.0 Lower: 14.0/13.5	16.0/16.0	16.0/16.0	16.0/16.0
Broil (000's BTU) Nat./LP	Upper: 120V/120V Lower: 16.5/13.5	4,000W	16.5/13.5	Upper: 120V/120V Lower: 16.5/13.5	16.5/13.5	16.5/13.5	16.5/13.5
Burners (000's BTU) LP	(1) 18.0 (1) 15.0 (2) 9.5 (1) 8.0 (1) 5.0	(1) 18.0 (1) 15.0 (2) 9.5 (1) 8.0 (1) 5.0	(1) 18.0 (1) 15.0 (2) 9.5 (1) 8.0 (1) 5.0	(1) 18.0 (1) 15.0 (1) 8.0 (1) 9.5 (1) 5.0	(1) 18.0 (1) 15.0 (1) 8.0 (1) 9.5 (1) 5.0	(1) 15.0 (1) 15.0 (1) 8.0 (1) 9.5 (1) 5.0	(1) 15.0 (1) 15.0 (1) 8.0 (1) 9.5 (1) 5.0
Gas range electrical rating†††	120V; 60Hz; 15A	208/240V; 60Hz; 30A	120V; 60Hz; 15A	120V; 60Hz; 15A	120V; 60Hz; 15A	120V; 60Hz; 15A	120V; 60Hz; 15A
LP conversion kit (included)	●	●	●	●	●	●	●
ACCESSORIES							
Trim kit	JXFILLR1SS	JXFILLR1SS	JXFILLR1SS JXFILLR1DD	JXFILLR1SS	JXFILLR1SS JXFILLR1DD JXFILLR1DD	JXFILLR1DD JXFILLR1DD	JXFILLR1DD
Reversible cast-iron griddle/grill	(included)	(included)	(included)	JXGRILL1	JXGRILL1	JXGRILL1	(included)
Non-stick aluminum griddle	WB31X24738	WB31X24738	WB31X24738	WB31X24738	(included)	(included)	(included)
Center grate	(included)	(included)	(included)	JXGRATE1	JXGRATE1	JXGRATE1	(included)


\*See use and care manual for required accessory.  
\*\*WiFi router required. \*JGS760DPWW use JXFILLR1SS; JGS760DPBB use JXFILLR1BB.  
\*\*\*WiFi-enabled feature.  
†No-preheat modes include baked goods, frozen pizza single rack, frozen pizza multi rack, frozen snack single rack, frozen snack multi rack and air fry.  
††SS = Stainless, FS = Fingerprint Resistant Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White with white glass door.  
CM = Color-matched, DD = Dark Dorian.  
†††15A requires a dedicated circuit.  
Factory set for natural gas. A set of LP orifices is included with each range for LP conversion.

30" SLIDE-IN GAS RANGES

DIMENSIONS AND INSTALLATION INFORMATION  
MODEL PGS960, PGS930, JGSS86, JGS760, JGSS66, JGSS61

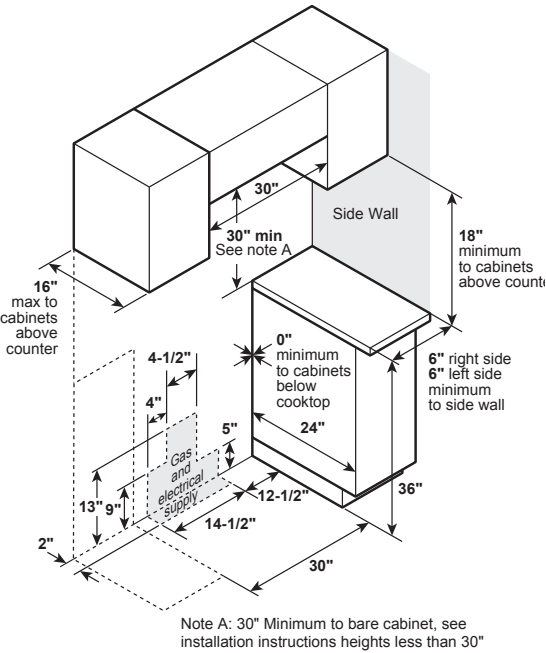

DIMENSIONS AND INSTALLATION INFORMATION  
MODEL P2S930

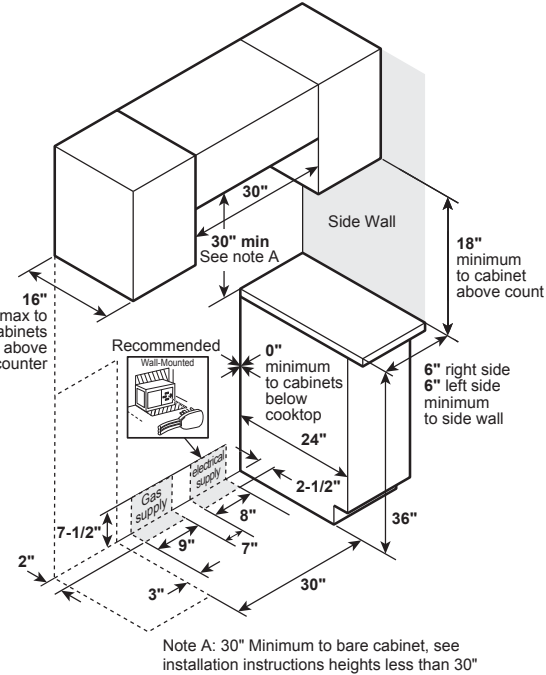


All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.




Listed by Underwriters Laboratories

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


MODELS PGS960, JGSS86

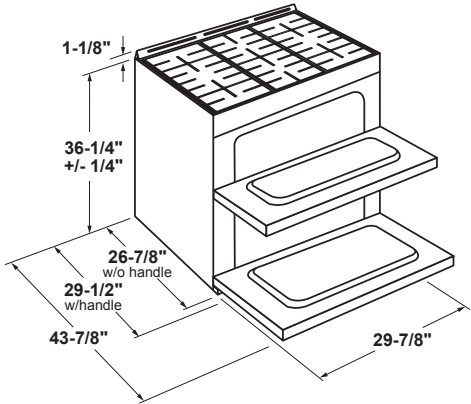

MODELS P2S930, PGS930, JGS760

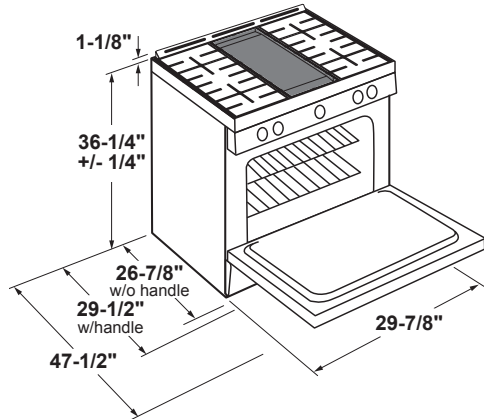

MODELS JGSS66, JGSS61

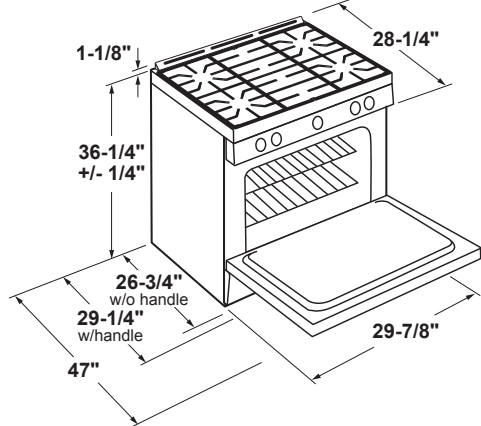


30" FREE-STANDING SMOOTHTOP ELECTRIC RANGES

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)  
MODEL PB965

FEATURES	GE PROFILE™
	PB965YP PB965BP
Capacity (cu. ft.) upper/lower	2.2/4.4
Cleaning system	Self-clean with Steam Clean option
Cooking technology	Upper: Traditional Lower: True Convection with Precise Air
CONTROLS	
Certified Sabbath mode	●
Control lock capability	●
Electronic touch controls	●
Electronic oven controls	●
WiFi Connect*	●
Upgradeable feature downloads	●**
Chef Connect	●
Delay bake	●
Digital temperature display	●
Hot surface lights	●
COOKTOP	
Element—left front	9"6" 3,100W Power Boil
Element—left rear	6" 1,200W
Element—right front	12"9"6" 3,000W Power Boil
Element—right rear	6" 1,200W
Element—center	6" 80W Warming Zone
Melt	●
OVEN	
Audible preheat signal	●
Auto Recipe Conversion	●
True Convection with Precise Air	●
No-preheat air fry	●
Convection roast	●
Fast preheat	●
Interior oven light	●
Self-clean oven racks	●
Oven racks	3 heavy-duty
Bake element	●
Broil element	Upper: 6-pass Lower: 8-pass
APPEARANCE	
Backguard***	SS wrap TS
Ceramic-glass cooktop	Black
Color appearance***	FS TS
Handle color***	SS TS
Handle design	Profile
Knobs—weighted	●
Knobs—color***	SS TS
Oven interior	Black gloss
WEIGHTS & DIMENSIONS	
Approx. shipping wt. (lbs.)	240
Overall oven interior dimensions (WxHxD in inches)	Upper: 24 x 8-7/8 x 18-1/4 Lower: 24 x 17-1/2 x 18-1/4
POWER/RATINGS	
Bake wattage	Upper: 2,650W Lower: 2,650W
Broil wattage	Upper: 3,000W Lower: 3,600W
Convection wattage	2,500W
Amp rating 240V/208V	40
KW rating 240V/208V	16.0/12.0

\*WiFi router required.  
\*\*WiFi-enabled feature.  
\*\*\*SS=Stainless, FS = Fingerprint Resistant Stainless, TS = Black Stainless.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

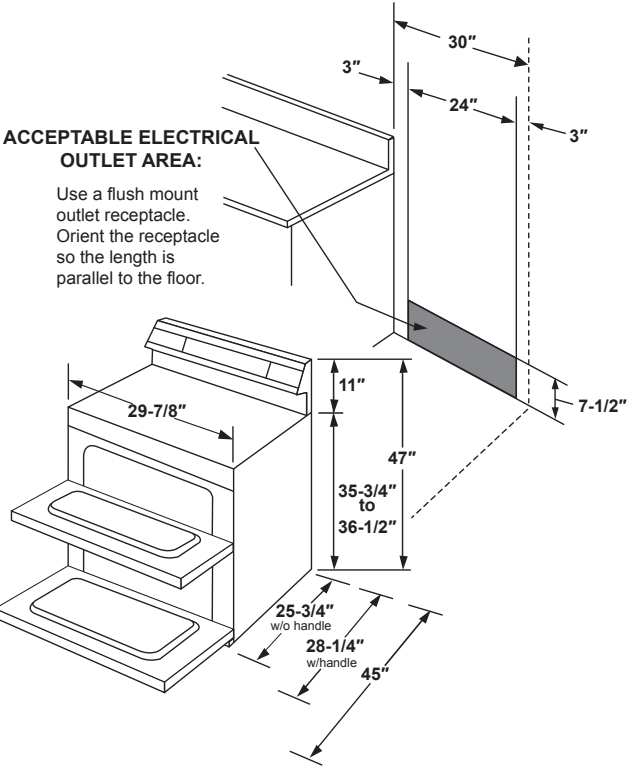

All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories




30" FREE-STANDING SMOOTHTOP ELECTRIC RANGES

	GE PROFILE™	GE					
	PB935YP	JBS86SP JBS86EP	JB735SP JB735EP JB735FP JB735DP	JB655SK JB655YK JB655EK JB655DK	JB645RK JB645EK JB645DK	JB625RK JB625DK	JBS60RK JBS60DK
California Prop 65	●	●	●	●	●	●	●
<b>FEATURES</b>							
Capacity (cu. ft.) up/low	5.3	2.2 / 4.4	5.3	5.3	5.3	5.3	5.3
Cleaning system	Self-clean with Steam Clean option Convection with Precise Air	Steam Clean Upper: Traditional Lower: Convection	Self-clean with Steam Clean option Convection	Self-clean Convection	Self-clean Traditional	Self-clean Traditional	
Cooking technology							Traditional
<b>CONTROLS</b>							
Sabbath mode	●	●	●	●	●	●	●
Sabbath mode—OU & CRC*	●		●				
Control lock capability	●	●	●	●	●	●	●
Electronic touch controls	●	●					
Electronic oven controls	●	●	●	●	●	●	●
WiFi Connect**	●						
Upgradeable feature downloads	●***						
Delay bake	●	●	●	●	●	●	●
Digital temp. display	●	●	●	●	●	●	●
Hot surface lights	●	●	1	1	1	1	1
Self-clean latch				●	●	●	
<b>COOKTOP</b>							
Element—left front	8"/5" 1,900W	9"/6" 3,100W Power Boil	9"/6" 3,100W Power Boil	9"/6" 3,100W Power Boil	9"/6" 3,100W Power Boil	6" 1,200W	6" 1,200W
Element—left rear	8" 2,000W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W	8" 2,000W	8" 2,000W
Element—right front	12"/9"/6" 3,600W Power Boil	12"/9" 3,000W	12"/9" 3,000W	12"/9" 3,000W	9"/6" 3,100W Power Boil	8" 2,500W Power Boil	9"/6" 3,100W Power Boil
Element—right rear	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W	6" 1,200W
Element—center	6" 80W warming zone	6" warming zone	6" warming zone	6" warming zone			
Melt	●	●	●	●	●	●	●
<b>OVEN</b>							
Audible preheat signal	●	●	●	●	●	●	●
Auto Recipe Conversion	●		●	●			
True Convection with Precise Air	●						
Convection bake	●	Lower	●	●			
Convection roast	●	Lower	●				
No-preheat air fry	●	●		●			
Drawer	Storage		Storage	Storage	Storage	Storage	Storage
Dual-element bake	●	●	●	●	●	●	●
Fast preheat	●		●				
Interior oven light	●	Upper: 1 incandescent Lower: 1 halogen	1 halogen	1 incandescent	1 incandescent	1 incandescent	1 incandescent
Oven racks	3	3	2	2	2	2	2
Bake element	Hidden	Upper: 6-pass Lower: 6 pass	Hidden	4-pass	4-pass	4-pass	4-pass
Broil element	6-pass	Upper: 6-pass Lower: 6-pass	6-pass	6-pass	4-pass	4-pass	4-pass
<b>APPEARANCE</b>							
Backguard***	SS wrap	SS wrap/ES	SS/ES/DS/CM	SS overlay/ES/CM	SS overlay/ES/CM	SS overlay/CM	SS overlay/CM
Ceramic-glass cooktop	Black	Black	Black Black Black Pat. white	Black Black Black Pat. white, Black	Black Gray Pat. white, Black	Black Pat. white, Black	Black Pat. white, Black
Color appearance†	FS	SS with gray/ES	SS with gray/ ES/DS/WW, BB	SS with gray/FS/ ES/WW, BB	SS with black/ ES/WW, BB	SS with black/ WW, BB	SS with black/ WW, BB
Handle color†	SS	SS/SS	SS/SS/SS/CM	SS/SS/SS/CM	SS/SS/CM	SS/CM	SS/CM
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Knobs—weighted	●						
Knobs—color†	SS	SS/SS	SS/SS/SS/SS/CM	SS/SS/CM	SS/SS/CM	BB/CM	BB/CM
Oven interior	Black gloss	Black	Black gloss	Black gloss	Gray	Gray	Gray
<b>WEIGHTS &amp; DIMENSIONS</b>							
Approx. shipping wt. (lbs.)	180	226	181	171	179	180	161
Overall oven interior dimensions (WxHxD in inches)	24-1/8 x 19-1/2 x 19-3/8	24 x 17-1/2 x 18-1/4	24-1/8 x 19-1/2 x 19-3/8	24-1/8 x 19-1/2 x 19-3/8	24-1/8 x 19-1/4 x 19-1/2	24-1/8 x 19-1/2 x 19-3/8	24-1/8 x 19-1/2 x 19-3/8
<b>POWER/RATINGS</b>							
Bake wattage	2,585W	Upper: 2,500W Lower: 2,650W	2,850W	2,585W	2,585W	2,585W	2,585W
Broil wattage	4,000W	Upper: 2,500W Lower: 3,600W	3,800W	3,800W	3,410W	3,410W	3,410W
Convection wattage	1,500W						
Amp rating 240V/208V	40	40	40	40	40	40	40
KW rating 240V/208V	12.1 / 9.1	15.6 / 11.7	12.5 / 9.4	12.4 / 9.3	12.1 / 9.1	10.4 / 7.8	11.0 / 8.3


\*See use and care manual for required accessory.  
\*\*WiFi router required.  
\*\*\*WiFi-enabled feature.  
†SS = Stainless, FS=Fingerprint Resistant Stainless, ES = Slate, DS = Black Slate, WW = White with white glass door, BB = Black with black glass door, CM = Color-matched.

DIMENSIONS AND INSTALLATION INFORMATION

MODELS PB935, JB735, JB655, JB645, JB625 AND JBS60

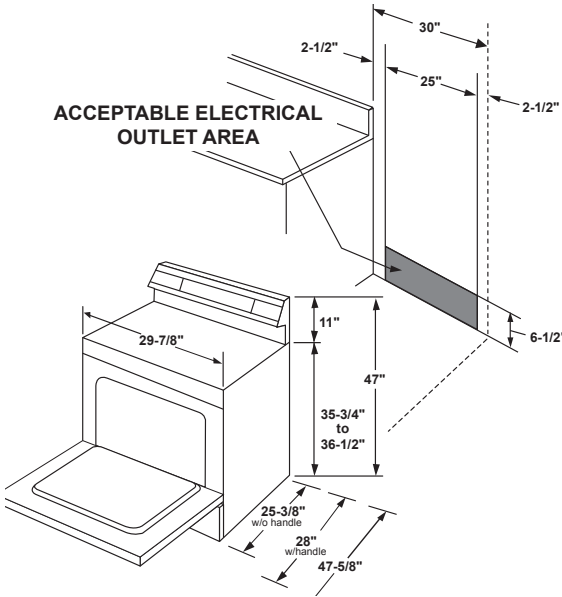

MODEL JBS86

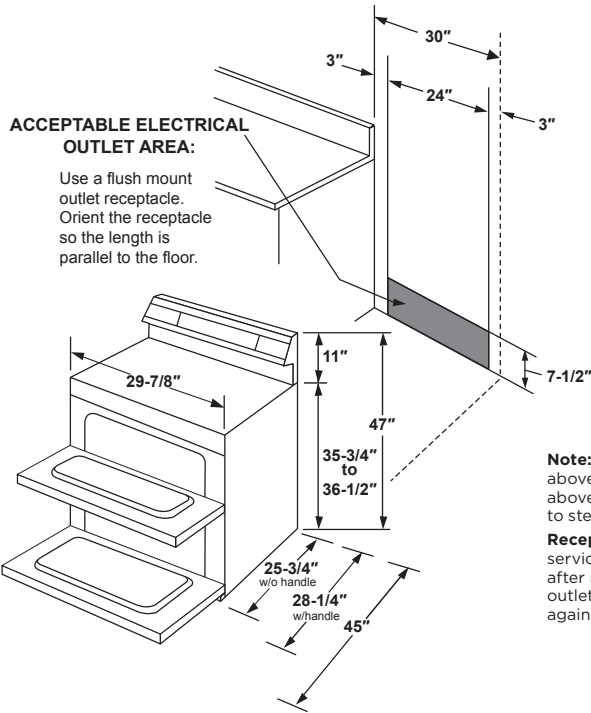

All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.





Listed by Underwriters Laboratories

30" AND 24" FREE-STANDING COIL AND SMOOTHTOP ELECTRIC RANGES

	GE						
	JB258RM JB258DM	JB256RM JB256DM	JB480SM JB480DM	JBS460DM	JBS360RR JBS360DM	JBS160DM	24" RANGE JAS640RM
UFAS/ADA compliant			●	●	●	●	●
California Prop 65	●	●	●	●	●	●	●
FEATURES							
Capacity (cu. ft.) upper/lower	5.3	5.0	5.0	5.0	5.0	5.0	2.9
Cleaning system	Self-clean	Self-clean	Self-clean				Steam Clean
Cooking technology	Traditional	Traditional	Traditional	Traditional	Traditional	Traditional	Traditional
CONTROLS							
Sabbath mode	●	●		●	●		●
Control lock capability	●	●		●	●		
Electronic oven controls	●	●		●	●		●
Delay bake	●	●					●
Digital temperature display	●	●		●	●		●
Hot surface lights	2	1	1		1		1
Self-clean latch	●	●	●				
COOKTOP							
Element—left front	6" 1,250W Temp Limiting Coil	6" 1,250W Temp Limiting Coil	6" 1,500W	6" 1,250W Temp Limiting Coil	6" 1,250W Temp Limiting Coil	6" 1,250W Temp Limiting Coil	6" 1,200W
Element—left rear	8" 2,400W Temp Limiting Coil	8" 2,400W Temp Limiting Coil	8" 2,000W	8" 2,400W Temp Limiting Coil	8" 2,400W Temp Limiting Coil	8" 2,400W Temp Limiting Coil	8" 2,000W
Element—right front	8" 2,400W Temp Limiting Coil	8" 2,400W Temp Limiting Coil	8" 2,000W	8" 2,400W Temp Limiting Coil	8" 2,400W Temp Limiting Coil	8" 2,400W Temp Limiting Coil	8" 2,000W
Element—right rear	6" 1,250W Temp Limiting Coil	6" 1,250W Temp Limiting Coil	6" 1,500W	6" 1,250W Temp Limiting Coil	6" 1,250W Temp Limiting Coil	6" 1,250W Temp Limiting Coil	6" 1,200W
Drip bowls	Black Chrome, Black	Black Chrome, Black	Chrome, Black	Chrome, Black	Black Chrome, Black	Chrome, Black	
OVEN							
Audible preheat signal	●	●					●
Drawer	Storage	Storage	Storage	Storage	Storage	Storage	Storage
Dual-element bake	●	●	●	●	●	●	●
Interior oven light	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent
Oven racks	2	2	2	2	2	2	2
Bake element	6-pass	4-pass	4-pass	4-pass	4-pass	4-pass	4-pass
Broil element	6-pass	4-pass	4-pass	4-pass	4-pass	4-pass	4-pass
APPEARANCE							
Backguard*	SS overlay CM	SS with black CM	SS with black CM	CM	SS CM	CM	SS overlay Black
Ceramic-glass cooktop			Black				
Color appearance*	SS WW, BB	SS WW, BB	SS with black WW, BB	WW, BB	SS WW, BB	WW, BB	SS
Handle color*	SS CM	SS CM	SS CM	CM	SS CM	CM	SS
Handle design	Designer-style	Designer-style	Designer-style	D-shaped	Designer-style	Designer-style	Designer-style
Knobs—color*	BB CM	BB CM	BB CM	CM	BB CM	CM	SS
Oven interior	Gray	Gray	Gray	Gray	Gray	Gray	Gray
WEIGHTS & DIMENSIONS							
Approx. shipping wt. (lbs.)	175	170	172	150	160	150	135
Overall oven interior dimensions (WxHxD in inches)	24-1/8 x 19-1/2 x 19-3/8	23-3/4 x 19 x 18-1/2	23-3/4 x 19 x 18-1/2	22-3/4 x 19 x 18-1/2	23-3/4 x 19 x 18-1/2	23-3/4 x 19 x 18-1/2	19 x 15-3/8 x 17-1/8
POWER/RATINGS							
Bake wattage	3,410W	2,585W	2,585W	2,585W	2,585W	2,585W	2,700W
Broil wattage	3,800W	3,410W	3,410W	3,410W	3,410W	3,410W	3,000W
Amp rating 240V/208V	40	40	40	40	40	40	40
KW rating 240V/208V	12.1 / 9.1	11.7 / 8.8	12.1 / 9.1	10.2 / 7.7	12.6 / 9.9	12.6 / 9.9	10.5 / 8.1

\*SS=Stainless, WW=White with white glass door, BB=Black with black glass door, CM=Color-matched.

DIMENSIONS AND INSTALLATION INFORMATION

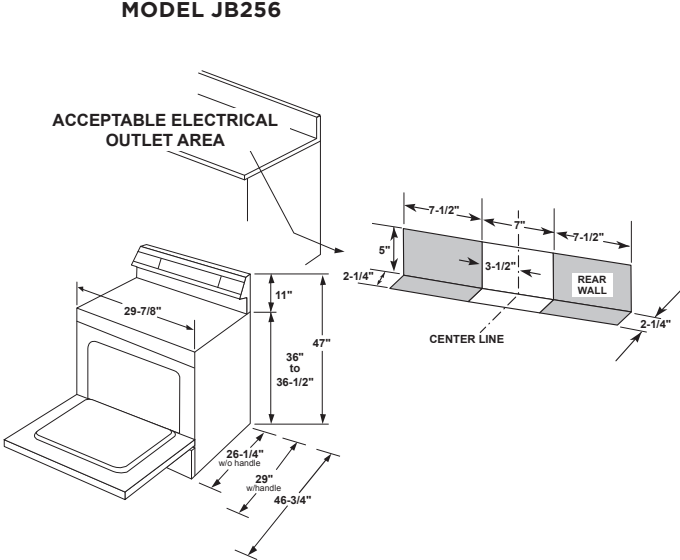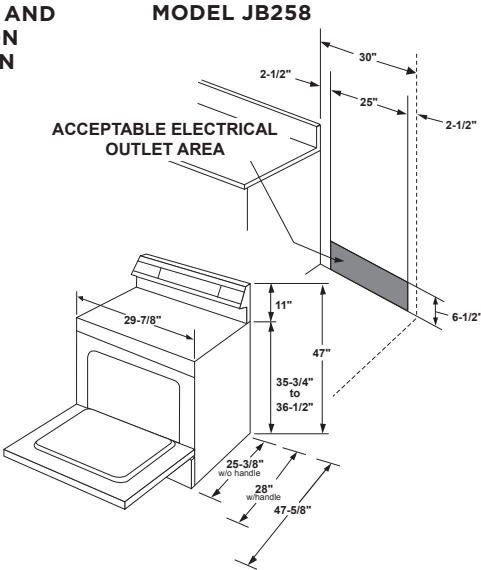


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


30" AND 24" FREE-STANDING COIL AND SMOOTHTOP ELECTRIC RANGES

DIMENSIONS AND INSTALLATION INFORMATION

MODELS JBS460, JBS360, JBS160

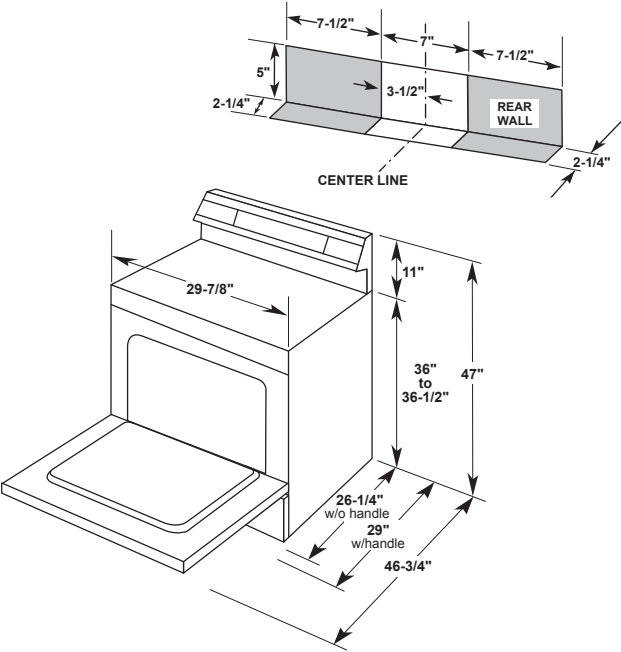

MODEL JB480


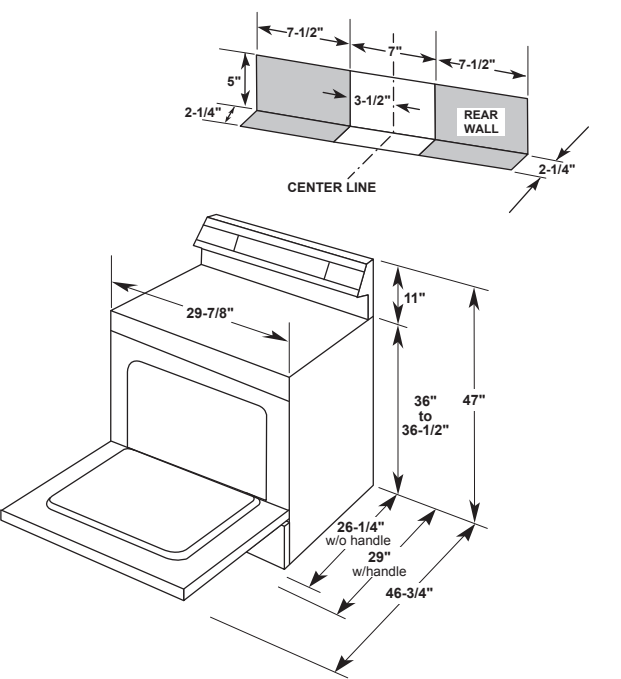


**Note:** This appliance has been approved for 0" spacing to adjacent surfaces above the cooktop. However, a 6" minimum spacing to surfaces less than 15" above the cooktop and adjacent cabinet is recommended to reduce exposure to steam, grease splatter and heat.

**Receptacle locations:** For free-standing ranges, locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against wall.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

MODEL JAS640

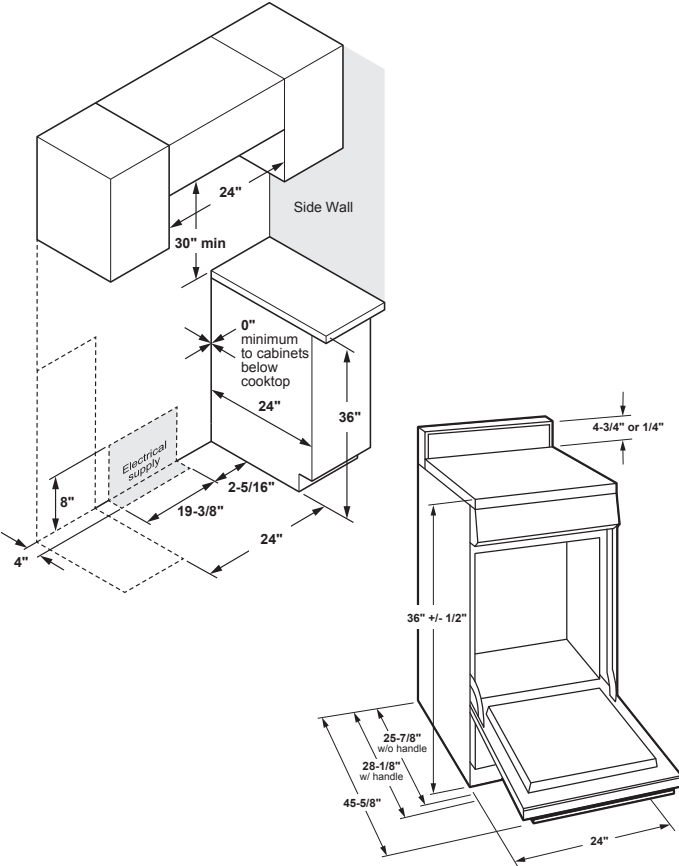

Recommended acceptable electrical outlet area. Orient the electrical receptacle so the length is parallel to the floor.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories



30" FREE-STANDING GAS RANGES

	GE PROFILE™			GE		
	PGB965YP PGB965BP	P2B935YP	PGB935YP	JGBS86SP JGBS86EP	JGB735SP JGB735EP JGB735FP JGB735DP	JGB660YP JGB660SP JGB660EP JGB660DP
California Prop 65	●	●	●	●	●	●
FEATURES						
Capacity (upper/lower)	2.5/4.3	5.7	5.6	2.5/4.3	5.0	5.0
Cleaning system	Self-clean with Steam Clean option	Self-clean with Steam Clean option	Steam Clean	Steam Clean	Self-clean with Steam Clean option	Self-clean with Steam Clean option
Cooking technology	Upper: Traditional Lower: True Convection	Convection	Convection	Upper: Traditional Lower: Convection	Convection	Traditional
CONTROLS						
Sabbath mode	●	●	●	●	●	●
Sabbath mode—OU & CRC*	●	●	●	●	●	●
Control lock capability	●	●	●	●	●	●
Electronic oven controls	●	●	●	●	●	●
WiFi Connect**	●	●	●			
Upgradeable feature downloads	●***	●***	●***			
Delay bake	●	●	●		●	●
Digital temperature display					●	●
Electronic clock & timer					●	●
Ignition	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Self-clean latch	●	●	●		●	●
COOKTOP						
Burner—left front	18,000 BTU Power Boil	20,000 BTU multi-ring burner	20,000 BTU multi-ring burner	15,000 BTU	18,000 BTU Power Boil	18,000 BTU Power Boil
Burner—left rear	5,000 BTU Precise Simmer	5,000 BTU	5,000 BTU	5,000 BTU Precise Simmer	5,000 BTU Precise Simmer	5,000 BTU Precise Simmer
Burner—right front	20,000 BTU tri-ring	18,000 BTU Power Boil	18,000 BTU Power Boil	15,000 BTU	9,500 BTU	9,500 BTU
Burner—right rear	9,500 BTU	9,500 BTU	9,500 BTU	12,000 BTU	12,000 BTU	12,000 BTU
Burner—center	10,000 BTU dual oval	10,000 BTU oval	10,000 BTU oval	10,000 BTU oval	10,000 BTU oval	10,000 BTU oval
Cooktop burners	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed
Deep-recessed cooktop	●	●	●	●	●	●
Griddle	Reversible cast-iron griddle/grill	Reversible cast-iron griddle/grill	Reversible cast-iron griddle/grill	Non-stick	Non-stick	Non-stick
Melt/Simmer	●	●	●	●	●	●
OVEN						
Audible preheat signal	●	●	●	●	●	●
Auto Recipe Conversion	●	●	●	●	●	
Convection bake	●	●	●	●	●	
Convection roast	●	●	●	●	●	
No-preheat air fry	●	●	●	●	●	
Drawer		Storage	Storage		Storage	Storage
In-oven broiling		●	●	●	●	●
Interior oven light	Incandescent	Incandescent	Incandescent	Incandescent	Incandescent	Incandescent
Oven racks	3	3	3	3	2	2
APPEARANCE						
Backguard†	SS wrap/TS	SS wrap	SS wrap	SS wrap/ES	SS wrap/DS/ES/CM	FS/SS wrap/ES/CM
Color appearance†	FS/TS	FS	FS	SS/ES	SS with gray/ES/DS/WW, BB	SS with gray/ES/WW, BB
Cooktop†	DD/DD	DD	DD	DD/DD	DD/DD/DD/CM	DD/DD/DD/CM
Grates	Black matte edge-to-edge	Black matte edge-to-edge	Black matte edge-to-edge	Black matte edge-to-edge	Black matte edge-to-edge	Black matte edge-to-edge
Grate material	Cast iron	Cast iron	Cast iron	Cast iron	Cast iron	Cast iron
Handle color†	SS/TS	SS	SS	SS/SS	SS/SS/TS/CM	SS/SS/SS/CM
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Knobs—color†	SS/TS	SS	SS	SS/SS	SS/SS/TS/CM	SS/SS/SS/CM
One-piece upswept cooktop	●	●	●	●	●	●
Oven interior	Black	Black	Black	Black	Gray	Gray
WEIGHTS & DIMENSIONS						
Approx. shipping wt. (lbs.)	242	225	225	225	210	215
Overall oven interior dimensions (WxHxD in inches)	Upper: 24 x 9-1/2 x 19-1/8 Lower: 24 x 15 x 20-5/8	24 x 19 x 20-5/8	24 x 19 x 20-5/8	Upper: 24 x 9-1/2 x 19-1/8 Lower: 24 x 15 x 20-5/8	24 x 19 x 19	24 x 19 x 19
POWER/RATINGS						
Bake (000's BTU) Nat/LP	Upper: 7.0/7.0 Lower: 14.0/13.5	2,585W	16.0/16.0	Upper: 7.0/7.0 Lower: 14.0/13.5	16.0/16.0	16.0/16.0
Broil (000's BTU) Nat/LP	Upper: 120V/120V Lower: 16.5/13.5	3,410W	10.0/10.0	Upper: 120V/120V Lower: 16.5/13.5	13.5/12.0	13.5/12.0
Burners (000's BTU) LP	18.0/5.0/18.0/9.5/8.0	20.0(15.0)/5.0/9.5/18.0/10.0(8.0)	20.0(15.0)/5.0/9.5/18.0/10.0(8.0)	15.0/5.0/9.5/12.0/10.0	18.0/5.0/9.5/12.0/8.0	18.0/5.0/9.5/12.0/8.0
Gas range electrical rating**	120V, 60Hz; 15A	240V, 60Hz; 30A	120V, 60Hz; 15A	120V, 60Hz; 15A	120V, 60Hz; 15A	120V, 60Hz; 15A
LP conversion kit (included)	●	●	●	●	●	●

\*See use and care manual for required accessory.  
\*\*WiFi router required.  
\*\*WiFi-enabled feature.  
†SS = Stainless, FS = Fingerprint Resistant Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White with white glass door, BB = Black with black glass door, CM = Color-matched, DD = Dark Dorian.  
††15A requires a dedicated circuit.  
Factory set for natural gas. A set of LP orifices is included with each range for LP conversion.


All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

**Gas self-clean range Anti-Tip bracket (part no. 205C1714P001)**




30" FREE-STANDING GAS RANGES


DOUBLE OVEN DIMENSIONS  
MODELS PGB965, JGBS86

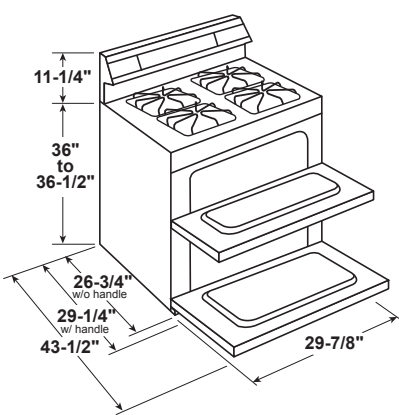

GAS PIPE AND ELECTRICAL  
OUTLET LOCATIONS  
MODELS PGB965, PGB935,  
JGBS86, JGB735, JGB660

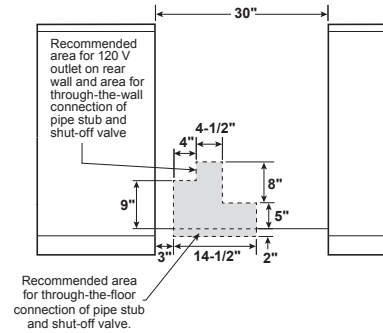


GAS PIPE AND ELECTRICAL  
OUTLET LOCATIONS  
MODEL P2B935

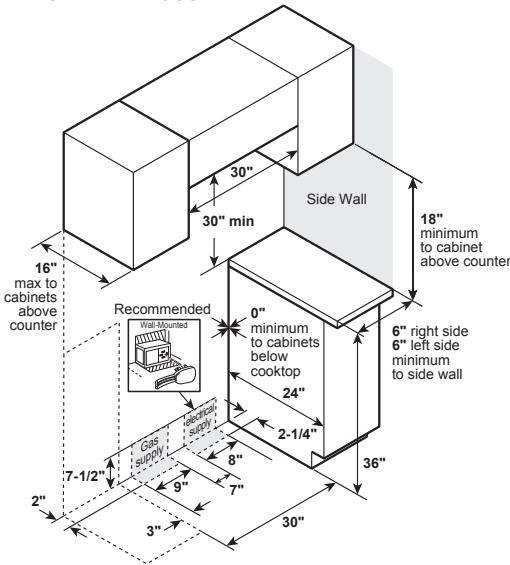


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.


SINGLE OVEN DIMENSIONS  
MODELS P2B935, PGB935

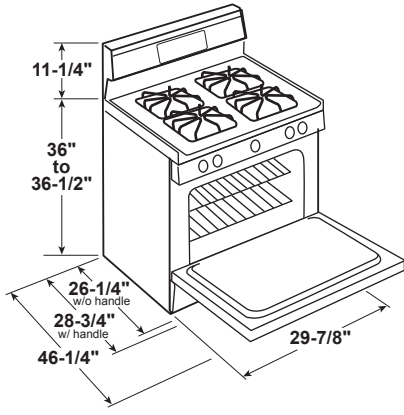

INSTALLATION  
INFORMATION  
MODELS PGB965,  
PGB935

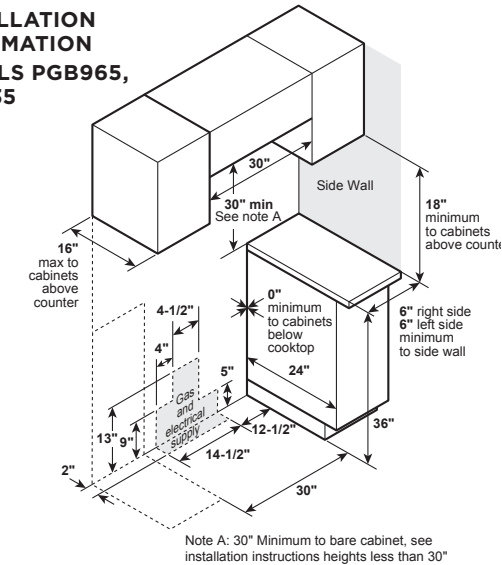

INSTALLATION INFORMATION  
MODEL JGBS86, JGB735, JGB660

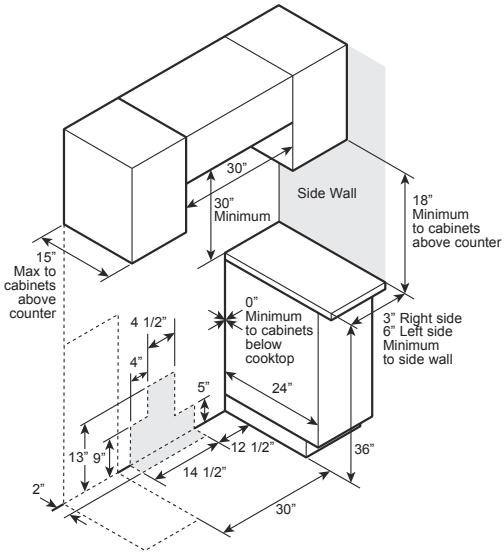


30" AND 24" FREE-STANDING GAS RANGES

	GE							
	JGB645SEK	JGB635REK JGB635DEK	JGBS66REK JGBS66EEK JGBS66DEK	JGBS61RP JGBS61DP	JGBS60REK JGBS60DEK	JGBS30REK JGBS30DEK	JGBS10DEM	24" RANGE JGAS640RM
UFAS/ADA compliant California Prop 65	●	●	●	●	●	●	●	●
FEATURES								
Capacity	5.0	5.0	5.0	5.0	4.8	4.8	4.8	2.9
Cleaning system	Self-clean	Self-clean	Steam Clean	Standard-clean	Standard-clean	Standard-clean	Standard-clean	Steam Clean
Cooking technology	Traditional	Traditional	Traditional	Traditional	Traditional	Traditional	Traditional	Traditional
CONTROLS								
Sabbath mode	●	●	●	●	●	●	●	●
Control lock capability		●	●	●	●			
Electronic oven controls	●	●	●	●	●			
Delay bake		●	●	●	●			
Digital temperature display	●	●	●	●	●			
Electronic clock & timer	●	●	●	●	●		●	
Ignition	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Self-clean latch	●	●						
COOKTOP								
Burner—left front	15,000 BTU	9,500 BTU	15,000 BTU	9,500 BTU	9,500 BTU	9,500 BTU	9,100 BTU	9,500 BTU
Burner—left rear	5,000 BTU	9,500 BTU	5,000 BTU	9,500 BTU	9,500 BTU	9,500 BTU	9,100 BTU	9,500 BTU
Burner—right front	9,500 BTU	13,000 BTU	9,500 BTU	13,000 BTU	13,000 BTU	13,000 BTU	9,100 BTU	15,000 BTU
Burner—right rear	12,000 BTU	5,000 BTU	12,000 BTU	5,000 BTU Precise Simmer	5,000 BTU	5,000 BTU	9,100 BTU	5,000 BTU
Burner—center			10,000 BTU					
Cooktop burners	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed
Deep-recessed cooktop	●		●					
Griddle			Non-stick					
OVEN								
Audible preheat signal		●	●	●	●			
Drawer	Storage	Storage	Broiler	Broiler	Broiler	Broiler	Broiler	Storage
In-oven broiling	●	●						●
Interior oven light	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent	1 incandescent
Oven racks	2	2	2	2	2	2	2	2
APPEARANCE								
Backguard*	SS	SS CM	SS CM CM	SS CM	SS CM	SS CM	CM	CM
Color appearance*	SS	SS with black WW, BB	SS ES WW, BB	SS with black WW, BB	SS WW, BB	SS WW, BB	WW, BB	SS with black
Grates	2-piece, edge-to-edge black matte	Black matte	Edge-to-edge black matte	Edge-to-edge black matte	Black matte	Black gloss	Black gloss	Black matte
Grate material	Cast iron	Heavy steel	Cast iron	Cast iron	Heavy steel	Heavy steel	Steel	Cast iron
Handle color*	SS	SS CM	SS SS TS CM	SS CM	SS CM	SS CM	CM	SS
Handle design	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Knobs—color*	CM	BB CM	SS CM	SS CM	BB CM	BB CM	CM	SS
One-piece upswept cooktop	●	●	●	●	●	●	●	●
Oven interior	Gray	Gray	Gray	Gray	Gray	Gray	Gray	Gray
WEIGHTS & DIMENSIONS								
Approx. shipping wt. (lbs.)	210	210	172	172	172	171	165	120
Overall oven interior dimensions (WxHxD in inches)	24 x 19 x 19	24 x 19 x 19	24 x 18-1/2 x 19	24 x 18-1/2 x 19	24 x 19 x 19	24 x 18-1/2 x 19	24 x 18-1/2 x 19	19 x 15-3/8 x 17-1/8
POWER/RATINGS								
Bake (000's BTU) Nat./LP	16.0/16.0	16.0/16.0	18.0/16.0	18.0/16.0	18.0/16.0	18.0/16.0	18.0/16.0	13.0/13.0
Broil (000's BTU) Nat./LP	13.5/12.0	13.5/12.0						
Burners (000's BTU) LP	12.0	9.5	15.0	(1) 15.0	9.5		8.0	9.5
	9.5	9.5	12.0	(1) 12.0	9.5		8.0	9.5
	15.0	11.0	5.0	(1) 9.5	11.0	(1) 12.0	8.0	15.0
	5.0	5.0	8.0	(1) 5.0	5.0	(1) 5.0	8.0	5.0
Gas range electrical rating**	120v; 60Hz/ 15A	120v; 60Hz/ 15A	120v; 60Hz/ 15A	120v; 60Hz/ 15A	120v; 60Hz/ 15A	120v; 60Hz/ 15A	120v; 60Hz/ 15A	120v, 60Hz, 15A
LP conversion kit (included)	●	●	●	●	●	●	●	●

\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White with white glass door, BB = Black with black glass door,  
CM = Color-matched.  
\*\*15A requires a dedicated circuit.  
Factory set for natural gas. A set of LP orifices is included with each range for LP conversion.


30" AND 24" FREE-STANDING GAS RANGES

DIMENSIONS


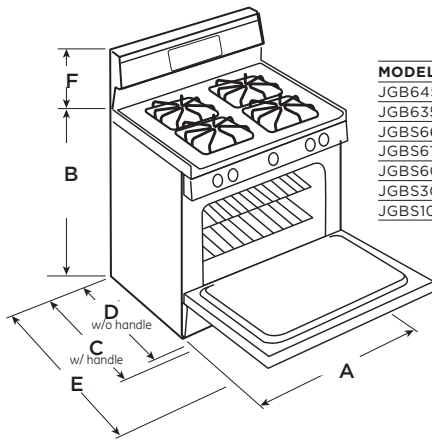


MODEL	A	B	C	D	E	F
JGB645	29-7/8"	36" to 36-1/2"	28-3/4"	26-1/4"	46-1/4"	11-1/4"
JGB635	29-7/8"	36" to 36-1/4"	28-3/4"	26-1/4"	46-1/4"	10-1/4"
JGBS66	29-7/8"	36" to 36-1/2"	28-3/4"	26-1/4"	46-1/4"	11-1/4"
JGBS61	29-7/8"	36" to 36-1/2"	28-3/4"	26-1/4"	46-1/4"	11-1/4"
JGBS60	29-7/8"	36" to 36-1/4"	28-3/4"	26-1/4"	46-1/4"	10-1/4"
JGBS30	29-7/8"	36" to 36-1/2"	28-3/4"	26-1/4"	46-1/4"	10-1/4"
JGBS10	29-7/8"	36" to 36-1/2"	28-3/4"	26-1/4"	46-1/4"	10-1/4"

DIMENSIONS (IN INCHES)  
MODEL JGAS640

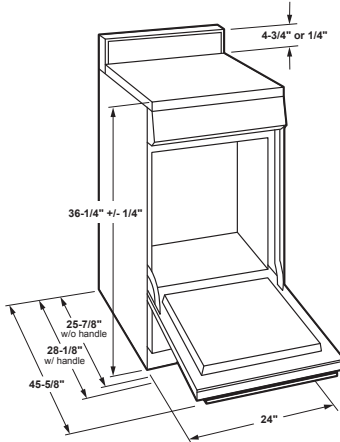


GAS PIPE AND ELECTRICAL OUTLET LOCATIONS

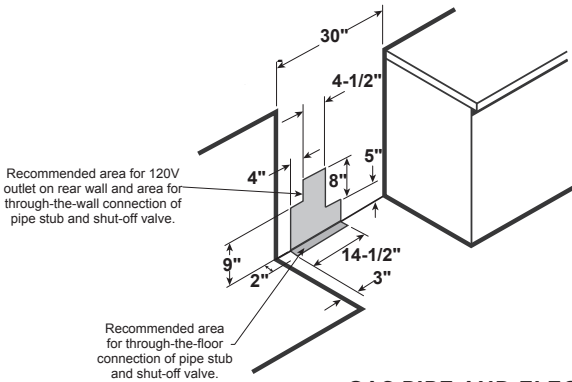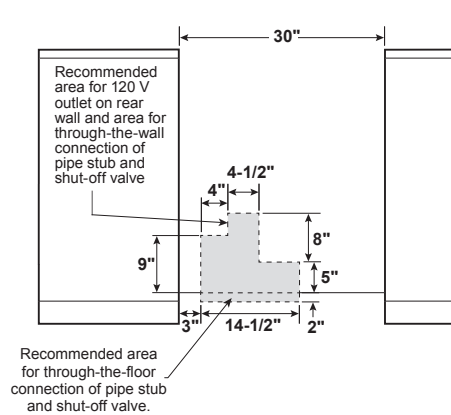

GAS PIPE AND ELECTRICAL  
OUTLET LOCATIONS  
MODEL JGAS640

INSTALLATION INFORMATION

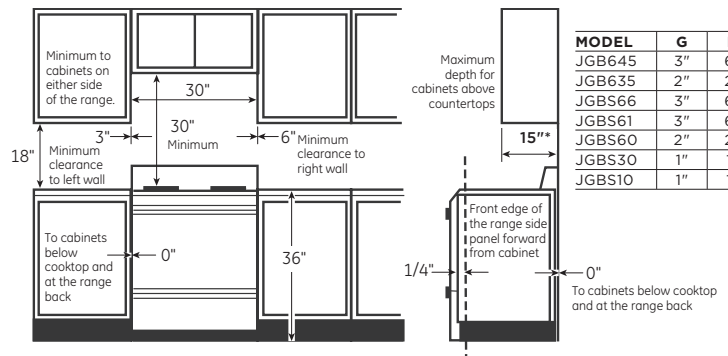

**Optional gas range accessory drip pans for sealed and standard traditional burner models are available at additional cost.**

Will not work on continuous grate models. To order these accessory drip pans, call toll-free 800-626-2000.

**Installation Information:**

Before installing, consult installation instructions packed with product for current dimensional data. There must be a minimum of 30" between unprotected cabinets above a free-standing gas range and countertops.



To prevent drafts from affecting burner operation, seal all openings in floor and wall.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

**Gas self-clean range Anti-Tip bracket (part no. 205C1714P001)**




ADVANTIUM® OVER-THE-RANGE OVENS

GE PROFILE™		
PSA9240SF		
PSA9120SF*		
AHAM certified	●	●
FEATURES		
Capacity (cu. ft.)	1.7	1.7
Watts—microwave (IEC-705 test procedure)	975 W	925 W
Cooking modes	Speedcook	●
	True European Convection	●
	Microwave	●
	Warming	●
CONTROLS		
Sensor controls	Beverage	●
	Defrost: Weight/Time	●
	Popcorn	●
	Potato	●
	Reheat	●
CONTROLS TOUCHPAD		
"Add 30 seconds" button	●	●
Control lockout	●	●
Custom recipe saver	●	●
Electronic touch controls	Dial glass touch	Dial glass touch
Preprogrammed menu items	●	●
OVEN		
Interior/cooktop lighting	Halogen	Halogen
Oven racks	2 (2 positions)	2 (2 positions)
Turntable	●	●
Turntable diameter (in.)	13-1/2	13-1/2
APPEARANCE		
Color appearance**	SS with gray	SS with gray
Handle color**	SS	SS
Handle design	Designer-style	Designer-style
Oven interior**	SS	SS
Touchpad	Gray	Gray
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	104	94
Overall oven interior dims. (WxHxD in inches)	21-5/9 x 9-6/15 x 14-1/4	21-5/9 x 9-6/15 x 14-1/4
POWER/RATINGS		
Exhaust vent fan	300 CFM	300 CFM
Input Volt/Hertz	240/208V/60Hz	120V/60Hz
Input Amps/Watts (max.)	30/6,300	15/1,800
ACCESSORIES		
Recirculating charcoal filter kit	JX81D (Included)	JX81D (Included)
36" filler kit	JX36B	JX36B
15" cabinetry bump kit	JX15BUMP	JX15BUMP

\*Certification in process at time of printing. Please confirm latest status.  
\*\*SS = Stainless.



**IMPORTANT:** PLEASE READ CAREFULLY. FOR PERSONAL SAFETY, THIS APPLIANCE MUST BE PROPERLY GROUNDED TO AVOID SEVERE OR FATAL SHOCK.



DO NOT, UNDER ANY CIRCUMSTANCES, CUT, DEFORM, OR REMOVE ANY OF THE PRONGS FROM THE POWER CORD. DO NOT USE WITH AN EXTENSION CORD.

NEMA 14-30R Wall Receptacle  
Ensure proper ground exists before use.

ADVANTIUM OVER-THE-RANGE OVEN DIMENSIONS  
MODELS PSA9240 AND PSA9120

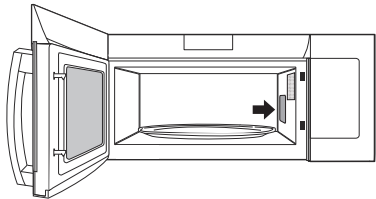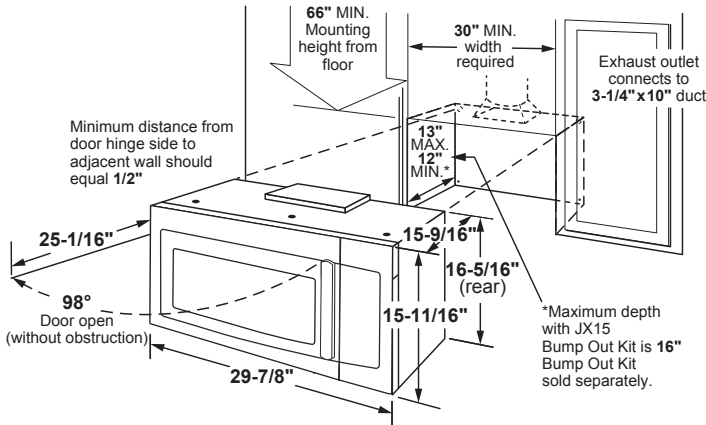

The wave guide cover is a thin specialized sheet consisting of mica material which covers the outlet where microwaves are emitted for cooking. Microwaves pass freely through this cover while it prevents steam and food particles from entering the magnetron area during cooking. **This cover is not to be removed or altered.** Doing so may void the product's warranty.


Location of wave guide cover will vary per model.

OVER-THE-RANGE MICROWAVE OVENS


GE PROFILE					
PVM9179SK PVM9179BL PVM9179DK					
PVM9005SJ PVM9005BL PVM9005EJ					
PNM9216SK					
PVM9215SK					
PVM9225SR					
AHAM certified	●	●	●	●	●
California Prop 65	●	●	●	●	●
FEATURES					
Capacity (cu. ft.)	1.7	2.1	2.1	2.1	2.1
Watts—microwave (IEC-705 test procedure)	950 W	1,050 W	1,000 W	1,000 W	1,000 W
Cooking modes	Microwave	●	●	●	●
	Convection	●	●	●	●
	Fast Cook	●	●	●	●
Factory-set recirculation			●		
CONTROLS					
Chef Connect					
Sensor controls	Beverage	●	●	●	●
	Defrost—Weight/Time	●	●	●	●
	Popcorn	●	●	●	●
	Potato	●	●	●	●
	Reheat	●	●	●	●
CONTROLS TOUCHPAD					
"Add 30 seconds" button	●	●	●	●	●
Control lockout	●	●	●	●	●
Electronic touch controls	Dial touch	●	●	●	●
Mute On/Off	●	●	●	●	●
My Cycle	●	●	●	●	●
Steam clean	●	●	●	●	●
OVEN					
Interior/cooktop lighting	Halogen/LED	Halogen	Halogen/LED	Halogen/LED	Halogen/LED
Oven racks	1 convection, 1 wire				
Turntable	●	●	●	●	●
Turntable diameter (in.)	13-3/5	14-1/4	14-1/5	14-1/5	14-1/5
APPEARANCE					
Color appearance*	SS with gray TS WW, BB	SS TS ES	SS with gray	SS with gray	SS with gray
Handle color*	Black Stainless SS appearance CM		SS appearance	SS appearance	SS appearance
Handle design	Designer-style	Integrated	Designer-style	Designer-style	Designer-style
Oven interior	Stainless	Epoxy	Easy-clean	Easy-clean	Easy-clean
Touchpad	Gray Gray White, Black	Gray	Gray	Gray	Gray
WEIGHTS & DIMENSIONS					
Approx. shipping wt. (lbs.)	81	65	66	66	66
Overall oven interior dimensions (WxHxD in inches)	21-5/8 x 9-3/4 x 14-1/4	23-5/32 x 10-5/32 x 15-3/16	21-15/16 x 11-5/8 x 14-9/16	21-15/16 x 11-5/8 x 14-9/16	21-15/16 x 11-5/8 x 14-9/16
POWER/RATINGS					
Exhaust vent fan	300 CFM	400 CFM	400 CFM	400 CFM	400 CFM
Input Volt/Hertz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz
Input Amps/Watts (max.)	15/1,550	15/1,700	15/1,580	15/1,580	15/1,580
ACCESSORIES					
36" filler kit	JX36B	JX36B	JX36B	15/1,580	15/1,580
15" cabinetry bump kit	JX15BUMP	JX15BUMP	JX15BUMP	JX15BUMP	JX15BUMP

\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White on white, BB = Black on black, CM = Color-matched.

OVER-THE-RANGE  
MICROWAVE OVEN  
DIMENSIONS  
MODEL PVM9005

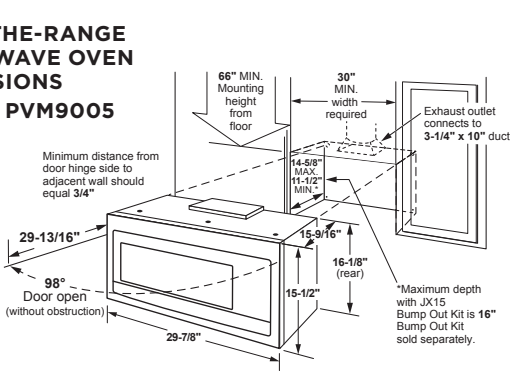

OVER-THE-RANGE MICROWAVE  
OVEN DIMENSIONS  
MODELS PVM9179,  
PVM9215 AND PNM9216

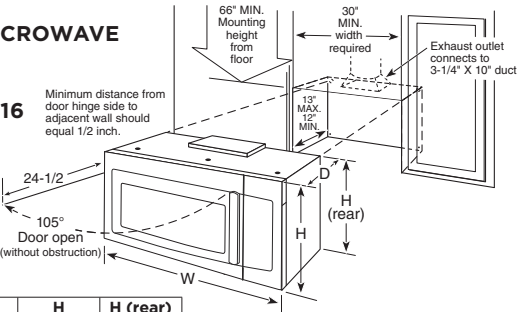

MODEL	W	D	H	H (rear)
PVM9179	29-7/8"	15-9/16"	16-5/16"	15-11/16"
PVM9215	29-7/8"	15-9/16"	16-5/16"	15-11/16"
PNM9216	29-7/8"	15-9/16"	16-5/16"	15-11/16"


OVER-THE-RANGE MICROWAVE OVENS

	GE						
	JNM7196SK JNM7196DK	JVM7195SK JVM7195EK JVM7195FL JVM7195DK*	JVM6175SK* JVM6175YK* JVM6175BL* JVM6175EK* JVM6175DK*	JVM6172SK* JVM6172DK*	JVM3160RF JVM3160EF JVM3160DF	JNM3163RJ* JNM3163DJ*	JVM3162RJ* JVM3162DJ*
AHAM certified	●	●	●	●	●	●	●
California Prop 65	●	●	●	●	●	●	●
FEATURES							
Capacity (cu. ft.)	1.9	1.9	1.7	1.7	1.6	1.6	1.6
Watts—microwave (IEC-705 test procedure)	1,000 W	1,000 W	1,000 W	1,000 W	1,000 W	1,000 W	1,000 W
Cooking mode	Microwave	●	●	●	●	●	●
Factory-set recirculation	●	●	●	●	●	●	●
CONTROLS							
Convenience controls	Beverage			●	●	●	●
	Cook time				●	●	●
	Defrost Weight/Time			●	●	●	●
	Popcorn			●	●	●	●
	Potato			●	●	●	●
Sensor controls	Reheat			●	●	●	●
	Beverage	●	●	●			
	Melt	●	●	●			
	Defrost Weight/Time	●	●	●			
	Popcorn	●	●	●			
Electronic touch controls	Potato	●	●	●			
	Reheat	●	●	●			
Mute On/Off	●	●	●	●			
OVEN							
Interior/cooktop lighting	Incandescent/ Halogen	Incandescent/ Halogen	Incandescent/ Halogen	Incandescent/ Halogen	Incandescent	Incandescent	Incandescent
Turntable	●	●	●	●	●	●	●
Turntable diameter (in.)	14-1/5	14-1/5	12-4/5	12-4/5	13-1/2	12-1/2	12-1/2
APPEARANCE							
Color appearance**	SS with gray WW, BB	SS with gray ES DS WW, BB	SS with gray FS TS WW, BB	SS with gray WW, BB	SS with black ES WW, CC, BB	SS with black WW,BB	SS with black WW,BB
	SS appearance Black Stainless CM	SS appearance Black Stainless SS appearance CM	SS appearance SS appearance Black Stainless SS appearance CM	SS appearance CM	SS appearance SS appearance CM	SS appearance CM	SS appearance CM
Handle color**	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style
Handle design	Easy-clean	Easy-clean	White	White	Epoxy white	Epoxy white	Epoxy white
Oven interior			White	White	Epoxy white	Epoxy white	Epoxy white
Touchpad	Gray, DD White, Black	Gray, DD Gray White, Black	Gray Gray Gray DD White, Black	Gray White, Black	Black Gray White, Bisque, Black	Black White, Black	Black White, Black
WEIGHTS & DIMENSIONS							
Approx. shipping wt. (lbs.)	66	66	66	66	66	63	63
Overall oven interior dimensions (WxHxD in inches)	21-15/16 x 11-5/8 x 14-9/16	21-15/16 x 11-5/8 x 14-9/16	20-11/16 x 10-5/16 x 14-3/16	20-11/16 x 10-5/16 x 14-3/16	18-13/16 x 9-1/4 x 14-13/32	19-1/2 x 10-15/16 x 14-3/16	19-1/2 x 10-15/16 x 14-3/16
POWER/RATINGS							
Exhaust vent fan	400 CFM	400 CFM	300 CFM	300 CFM	300 CFM	300 CFM	300 CFM
Input Volt/Hertz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz
Input Amps/Watts (max.)	15/1,580	15/1,580	15/1,580	15/1,600	15/1,580	14/1,600	14/1,600
ACCESSORIES							
36" filler kit	JX36B	JX36B	JX36B	JX36B	JX36B	JX36B	JX36B
15" cabinetry bump kit	JX15BUMP	JX15BUMP	JX15BUMP	JX15BUMP	JX15BUMP	JX15BUMP	JX15BUMP

\*Certification in process at time of printing. Please confirm latest status.  
\*\*SS = Stainless, FS = Fingerprint Resistant Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White on white, CC = Bisque on bisque, BB = Black on black, DD = Dark Dorian, CM = Color-matched.


The wave guide cover is a thin specialized sheet consisting of mica material which covers the outlet where microwaves are emitted for cooking. Microwaves pass freely through this cover while it prevents steam and food particles from entering the magnetron area during cooking. **This cover is not to be removed or altered.** Doing so may void the product's warranty.

Location of wave guide cover will vary per model.

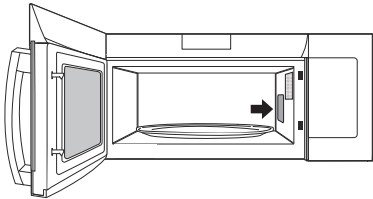

OVER-THE-RANGE MICROWAVE OVENS

OVER-THE-RANGE MICROWAVE OVEN DIMENSIONS  
ALL GE MODELS

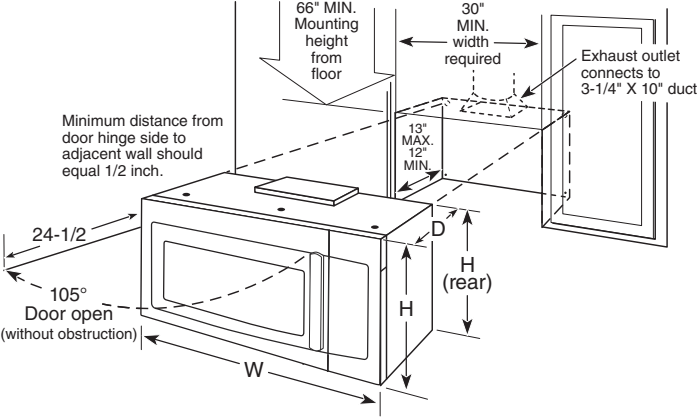


OPTIONAL ACCESSORIES  
(SOLD SEPARATELY)

FILLER PANEL KIT

See below for part numbers.

When replacing a 36" range hood, this kit fills in the additional width to provide a custom built-in appearance. For installation between cabinets only; not for end-of-cabinet installation. Each kit contains two 3"-wide filler panels.

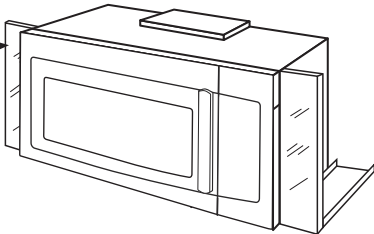

15" CABINETRY BUMP-OUT KIT  
(NOT SHOWN)

To be used for installation with a 15" depth cabinet. Kit is a bracket that increases the depth from the wall by 3".

MODEL	36" FILLER KIT	15" CABINETRY BUMP-OUT KIT
PSA9240SFSS	JX36BSS	JX15BUMPBB
PSA9120SFSS	JX36BSS	JX15BUMPBB
PVM9179BTLs	JX36BTS	JX15BUMPBB
PVM9179SKSS	JX36BSS	JX15BUMPBB
PVM9179EKES	JX36BES	JX15BUMPBB
PVM9179DKWW	JX36BWW	JX15BUMPWW
PVM9179DKBB	JX36BBB	JX15BUMPBB
PVM9005BLTS	JX36B	JX15BUMPBB
PVM9005SJSS	JX36B	JX15BUMPBB
PVM9005EJES	JX36B	JX15BUMPBB
PVM9215SKSS	JX36BSS	JX15BUMPBB
PNM9216SKSS	JX36BSS	JX15BUMPBB
JNM7196BLTS	JX36BTS	JX15BUMPBB
JNM7196SKSS	JX36BSS	JX15BUMPBB
JNM7196DKWW	JX36BWW	JX15BUMPWW
JVM7195BTLs	JX36BTS	JX15BUMPBB
JNM7196DKBB	JX36BBB	JX15BUMPBB
JVM7195SKSS	JX36BSS	JX15BUMPBB
JVM7195EKES	JX36BES	JX15BUMPBB
JVM7195DKWW	JX36BWW	JX15BUMPWW
JVM7195DKBB	JX36BBB	JX15BUMPBB

MODEL	W	D	H	H (REAR)
JNM7196/JVM7195	29-7/8"	15-9/16"	16-5/16"	15-11/16"
JVM6175	29-7/8"	15-9/16"	16-5/16"	15-11/16"
JVM6172	29-7/8"	15-9/16"	16-5/16"	15-7/16"
JNM3184	29-7/8"	16-7/16"	15-1/8"	16-1/8"
JNM3161/JVM3160	29-7/8"	15-9/16"	16-7/16"	16-1/8"
JNM3163/JVM3162	29-7/8"	15-7/8"	16"	16-7/16"

VENTILATION OPTIONS

The over-the-range convection/microwave and microwave ovens are designed for adaptation to the following three types of ventilation:

**Outside exhaust** (Vertical—as shown above)

**Outside exhaust** (Horizontal)

**Recirculating** (Non-vented ductless—see Filter Kit Drawing, order JX81D, JX81H, JX81J, JX81L or JX81C)

Requires 120V grounded outlet. Electrical receptacle must be located in cabinet above over-the-range microwave/ convection and microwave ovens. No additional wiring, venting or cabinet rebuilding necessary in many cases. Complete detailed, easy-to-follow installation instructions and convenient full-size templates are packed with product.

**Important:** When installing these ovens over a range, allow minimum of 2" from bottom of microwave oven to top of range backguard to allow for removal of light covers.

MODEL	36" FILLER KIT	15" CABINETRY BUMP-OUT KIT
JVM6175BLTS	JX36BTS	JX15BUMPBB
JVM6175SKSS	JX36BSS	JX15BUMPBB
JVM6175EKES	JX36BES	JX15BUMPBB
JVM6175DKWW	JX36BWW	JX15BUMPWW
JVM6175DKBB	JX36BBB	JX15BUMPBB
JVM6172SKSS	JX36BSS	JX15BUMPBB
JVM6172DKWW	JX36BWW	JX15BUMPWW
JVM6172DKBB	JX36BBB	JX15BUMPBB
JNM3163RJSS	JX36BSS	JX15BUMPBB
JNM3163DJWW	JX36BWW	JX15BUMPWW
JNM3163DJBB	JX36BBB	JX15BUMPBB
JVM3162RJSS	JX36BSS	JX15BUMPBB
JVM3162DJWW	JX36BWW	JX15BUMPWW
JVM3162DJBB	JX36BBB	JX15BUMPBB
JNM3161MFSA	JX36B	JX15BUMPBB
JVM3160RFSS	JX36B	JX15BUMPBB
JVM3160EFES	JX36B	JX15BUMPBB
JVM3160DFWW	JX36B	JX15BUMPWW
JVM3160DFCC	JX36B	JX15BUMPWW/BB
JVM3160DFBB	JX36B	JX15BUMPBB

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.




MICROWAVE OVENS

	GE PROFILE™	GE
	EXTRA-LARGE	EXTRA-LARGE
	PES7227SL PES7227DL	JES2251SJ
UFAS/ADA compliant*	●	
California Prop 65	●	●
CAPACITY		
Oven cavity (cu. ft.)	2.2	2.2
FEATURES		
Watts (IEC-705 test procedure)	1,100	1,200
Inverter technology		●
Electronic touch controls	●	●
Scrolling display with Help pad	●	●
Demo mode	●	
Electronic digital display with clock	●	●
Display On/Off	●	●
Sensor controls	Popcorn	
	Beverage	●
	Lunch/Snack	●
	Reheat	●
	Vegetable	●
	Potato	●
	Breakfast	●
Dinner plate		●
		●
Express Cook	1-6 min.	
Warming control		●
Instant On controls	●	
Time Cook	I & II	I & II
Add 1 Minute		●
"Add 30 seconds" button	●	
Auto/Time Defrost		●
Weight/Time Defrost	●	
Power levels	10	10
Turntable	Recessed	●
Turntable diameter (in.)	16-1/2	16
Timer on/off	●	●
Delay Start		●
Cooking complete reminder	●	
Control lockout	●	●
APPEARANCE		
Color appearance**	SS WW, BB	SS
	Gray CM	
Case color**		SS
WEIGHTS & DIMENSIONS		
Approx. shipping weight (lbs.)	51	40
Dimensions (WxHxD in inches)	Cavity	17-5/16 x 11-1/16 x 19-1/16
	Exterior***	18-1/2 x 11 x 18-1/2
POWER/RATINGS		
Input Volt/Hz		
Electric input @ 120V	Watts	120/60
	Amperage	1,650
ACCESSORIES		
Cooking guide label	●	●
Right-angle plug	●	

\*Model can be UFAS/ADA compliant in countertop or built-in configuration. For built-in, please see information for individual model.  
\*\*SS = Stainless, TS = Black Stainless, ES = Slate, DS = Black Slate, WW = White on white, BB = Black on black, CM = Color-matched.  
\*\*\*Exterior dimensions: height includes feet, depth does not include handle.

The wave guide cover is a thin specialized sheet consisting of mica material which covers the outlet where microwaves are emitted for cooking. Microwaves pass freely through this cover while it prevents steam and food particles from entering the magnetron area during cooking. **This cover is not to be removed or altered.** Doing so may void the product's warranty.

Location of wave guide cover will vary per model.

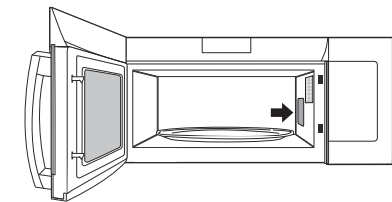

	GE		
	EXTRA-LARGE	FAMILY-SIZE	
	JES2051SN JES2051DN	JES1657SM JES1657BM JES1657DM	JES1460DS
California Prop 65	●	●	●
CAPACITY			
Oven cavity (cu. ft.)	2.0	1.6	1.4
FEATURES			
Watts (IEC-705 test procedure)	1,200	1,150	1,100
Electronic touch controls	●	●	●
Scrolling display with Help pad	●		
Demo mode	●		
Electronic digital display with clock	●	●	●
Display On/Off	●		●
Sensor controls	Popcorn	●	●
	Beverage	●	●
	Reheat	●	●
	Vegetable	●	●
	Potato	●	●
Chicken/Fish	●		●
Convenience controls		●	
	Cook		
Express Cook	1-6 min.	1-6 min.	1-6 min.
Instant On controls	●	●	●
Time Cook	I & II	I & II	I & II
"Add 30 seconds" button	●	●	●
Auto/Time Defrost	●	●	●
Power levels	10	10	10
Turntable	●	●	Recessed
Turntable diameter (in.)	16	13-5/8	12-5/8
Kitchen timer/Timer on/off	— / ●	— / ●	— / ●
Delay Start/Reminder	●		
Cooking complete reminder	●	●	●
Control lockout	●		●

Color appearance*	SS WW, BB	SS TS WW,BB	WW, BB
	Black CM	SS Black White, Black	CM

Case color*	Black CM	SS Black White, Black	CM
WEIGHTS & DIMENSIONS			
Approx. shipping weight (lbs.)	55	44	38
Dimensions (WxHxD in inches)	Cavity	16-3/4 x 11-1/4 x 18-1/8	14-3/4 x 9-7/8 x 16-1/4
	Exterior**	23-7/8 x 13-5/8 x 19-1/4	21-3/4 x 12-13/16 x 17-11/16
POWER/RATINGS			
Input Volt/Hz			
Electric input @ 120V	Watts	120/60	120/60
	Amperage	1,650	1,600
ACCESSORIES			
Cooking guide label	●	●	●

\*SS = Stainless, WW = White on white, BB = Black on black, CM = Color-matched.  
\*\*Exterior dimensions: height includes feet, depth does not include handle.


MICROWAVE OVENS (CONT.)

	GE					
	MID-SIZE					
	JES1145SH JES1145DL JES1145DM	JES1097SM	JES1095SM JES1095BM JES1095DM	JES1109RR	JEM3072SH JEM3072DH	JES1072SH JES1072DM
California Prop 65	●	●	●	●	●	●
CAPACITY						
Oven cavity (cu. ft.)	1.1	0.9	0.9	1.0	0.7	0.7
FEATURES						
Watts (IEC-705 test procedure)	950	900	900	1,000	700	700
Electronic touch controls	●	●	●	●	●	●
Electronic digital display with clock	●	●	●	●	●	●
Convenience controls	Popcorn	●	●	●	●	●
	Beverage	●	●	●	●	●
	Reheat	●	●	●	●	●
	Vegetable	●	●	●		●
	Potato	●	●		●	
Pizza	●	●	●	●		
Express Cook	1-6 min.	●	●	1-6 min.	1-6 min.	1-6 min.
Instant On controls	●	●	●	●	●	●
Time Cook	I & II	●	●	I & II	I & II	I & II
"Add 30 seconds" button	●	●	●	●	●	●
Auto/Time Defrost	●	●	●	●	●	●
Power levels	10	10	10	10	10	10
Turntable	●	●	●	●	●	●
Turntable diameter (in.)	12-3/4	10.5	10.5	12.4	9-5/8	10-3/4
Kitchen timer/Timer on/off	● / —	● / ●	● / ●	— / ●	— / ●	— / ●
Delay Start/Reminder	— / ●				— / ●	— / ●
Cooking complete reminder	●	— / ●	●	●	●	●
Control lockout	●				●	●
WiFi Connect*		●				
APPEARANCE						
Color appearance**	SS/WW/BB	SS	SS/TS/WW, BB	SS	SS/WW, BB	SS/WW, BB
Case color**	Black/CM/CM	Gray	Gray/Gray/WW/BB	Black	Black/CM	Black/CM
WEIGHTS & DIMENSIONS						
Approx. shipping weight (lbs.)	34	30	30	44	24	24
Dimensions (WxHxD in inches)	Cavity	13-7/8 x 9-1/2 x 14-1/8	13-2/3 x 8-2/3 x 12-2/5	13-2/3 x 8-2/3 x 12-2/5	14 x 9-1/2 x 13-1/4	12-1/4 x 7-7/8 x 11-5/8
	Exterior***	20-5/16 x 12 x 15-5/8	19 x 11-1/2 x 14-1/2	19 x 11-1/2 x 14-1/2	20-1/2 x 11-4/5 x 16-1/2	17-1/4 x 10-1/8 x 13
POWER/RATINGS						
Input Volt/Hz						
Electric input @ 120V	Watts	120/60	120/60	120/60	120/60	120/60
	Amperage	1,580	1,050	1,050	1,500	1,050
ACCESSORIES						
Cooking guide label	●	●	●	●	●	●
Optional hanging kit					JXA019K†	
Right-angle plug					●	

\*WiFi router required.  
\*\*SS = Stainless, TS = Black Stainless, WW = White on white, BB = Black on black, CM = Color-matched.  
\*\*\*Exterior dimensions: height includes feet, depth does not include handle.  
†Part No. JXA019K is available at additional cost.

UNDERCABINET MOUNTING KIT (PART NO. JXA019K) FOR MICROWAVE OVEN MODEL JEM3072 (Sold separately)


Not to be used over a thermal oven.



**Undercabinet Installation**  
Install Spacemaker II microwave ovens in just a few easy steps with the mounting template, which provides all the necessary measurements. These microwave ovens can be installed on practically any wood or metal cabinets. Installation may vary depending on cabinets.  
**Note:** 120V, 60-cycle, grounded power receptacle location optional on back within cabinet opening.

CUTOUT DIMENSIONS

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

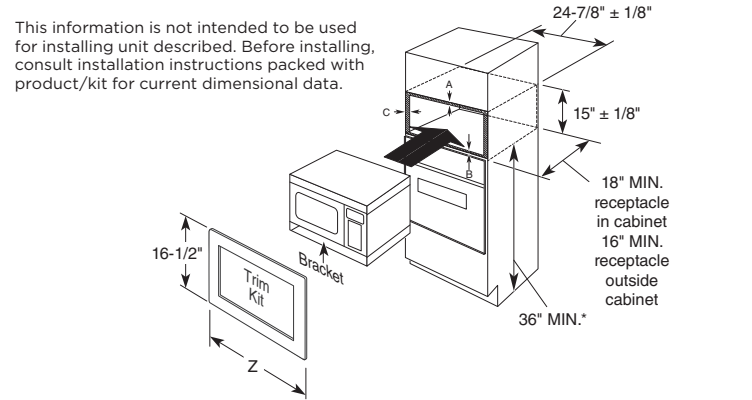

Cabinet overlap requirements	30"	27"
A - Overlap of trim kit over top of cabinet	3/4"	3/4"
B - Overlap of trim kit over bottom of cabinet	5/8"	5/8"
C - Overlap of trim kit over sides of cabinet	2-1/2"	1"

Note:  
Allow an additional inch of clearance beyond trim frame on all sides


\*For ADA compliance, the microwave must be installed no higher than 48".

GE PROFILE™ STAINLESS INTERIOR DISHWASHERS

	GE PROFILE					
	PDT785SYNFS PDT785SBNTS	PDT775SYNFS	PDT755SYRFS	PDP755SYRFS	PDT715SYNFS PDT715SBNTS PDT715SMNES	PDP715SYNFS PDP715SBNTS
ENERGY STAR® certified	●	●	●	●	●	●
CEE Tier 1 qualified	●	●	●	●	●	●
Energy Factor (EF)	0.8	0.8	0.8	0.8	0.8	0.8
Normal wash gallons per cycle*	3.5	3.5	3.5	3.5	3.5	3.5
Kilowatt hrs./yr.	270	270	270	270	270	270
FEATURES						
Interior	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Tub and door liner	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Place settings	Up to 16	Up to 16	Up to 16	Up to 16	Up to 16	Up to 16
Front appearance	Top control	Top control	Top control	Top control	Top control	Top control
Wash system	700 Series	700 Series	700 Series	700 Series	700 Series	700 Series
Water filtration	100% with removable filter	100% with removable filter	100% with removable filter; Filter treated with Microban® Antimicrobial Technology	100% with removable filter; Filter treated with Microban Antimicrobial Technology	100% with removable filter	100% with removable filter
Hard-food disposer	Piranha™	Piranha	Piranha	Piranha	Piranha	Piranha
Wash levels	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower
Deep Clean Silverware Jets	●	●	●	●	●	●
Automatic temperature control	●	●	●	●	●	●
Clean Sensor	●	●	●	●	●	●
Rinse Aid dispenser	Rinse Aid with indicator and adjustment with sensor	Rinse Aid with indicator and adjustment with sensor	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment
Clean touch controls	●	●	●	●	●	●
Sabbath/door wake-up mode	●	●	●	●	●	●
On control indicators	Clean, Sanitized, Cycle time remaining	Clean, Sanitized, Cycle time remaining	Clean, Sanitized, Cycle time remaining	Clean, Sanitized, Cycle time remaining	Clean, Sanitized, Cycle time remaining	Clean, Sanitized, Cycle time remaining
Status lights on door	Washing, Drying, Clean	Washing, Drying, Clean	Washing, Drying, Clean	Washing, Drying, Clean	Washing, Drying, Clean	Washing, Drying, Clean
WiFi	Built-in	Built-in	Built-in	Built-in	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)
Touchpads	8	8	8	8	8	8
Cycles and options	5, 11	5, 11	5, 11	5, 11	5, 11	5, 11
3-digit countdown display	●	●	●	●	●	●
Last cycle memory	●	●	●	●	●	●
Audible end-of-cycle signal	●	●	●	●	●	●
Cycles	1-Hour Wash/Auto Sense/ Heavy Wash/Light Wash/ Normal Wash	1-Hour Wash/Auto Sense/ Heavy Wash/Light Wash/ Normal Wash	1-Hour Wash/Auto Sense/ Heavy Wash/Light Wash/ Normal Wash	1-Hour Wash/Auto Sense/ Heavy Wash/Light Wash/ Normal Wash	1-Hour Wash/Auto Sense/ Heavy Wash/Light Wash/ Normal Wash	1-Hour Wash/Auto Sense/ Heavy Wash/Light Wash/ Normal Wash
Options						
Bottle Jets	4	4	4	4	4	4
Wash Zones	●	●	●	●	●	●
Steam PreWash/PreSoak	Steam PreSoak	Steam PreSoak	Steam PreWash	Steam PreWash	Steam PreWash	Steam PreWash
Delay Start	1- to 12-hr.	1- to 12-hr.	1- to 12-hr.	1- to 12-hr.	1- to 12-hr.	1- to 12-hr.
Wash temp—Boost	●	●	●	●	●	●
Wash temp—Sanitize**	●	●	●	●	●	●
Dry Boost™	Twin Turbo	Twin Turbo	●	●	●	●
Lock controls	●	●	●	●	●	●
Racking						
Third Rack	●	Optional	●	●	●	●
Rack finish	Silver	Silver	Silver	Silver	Silver	Silver
Ball-tip tines	●	●	●	●	●	●
Upper rack	Easy-touch adjustable full-extension	Easy-touch adjustable full-extension	2 Blue rack handles treated with Microban Antimicrobial Technology	2 Blue rack handles treated with Microban Antimicrobial Technology	Easy-touch adjustable full-extension	Easy-touch adjustable full-extension
Fold-down-tine flexibility	2 full-length, upper; 2 multi-position, lower	2 full-length, upper; 2 multi-position, lower	2 full-length, upper; 2 multi-position, lower	2 full-length, upper; 2 multi-position, lower	2 multi-position, lower	2 multi-position, lower
Utility shelves	●	●	●	●	●	●
Angled tines	●	●	●	●	●	●
Silverware basket	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers protected by Microban Antimicrobial Technology	1-pc. silverware basket with 3 cell covers protected by Microban Antimicrobial Technology	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers
Handle color	Stainless steel w/chrome	Stainless steel w/chrome	Stainless steel with chrome treated with Microban Antimicrobial Technology	Color-Matched treated with Microban Antimicrobial Technology	Stainless steel w/chrome	Color-matched
Handle design	Profile handle	Profile handle	Profile handle	Profile handle	Profile handle	Pocket handle
DRY						
Hidden vent with fan	●	●	●	●	●	●
Twin Turbo Dry Boost	●	●	●	●	●	●
Hidden heater	●	●	●	●	●	●
Rinse Aid Sensor	●	●	●	●	●	●
QUIET						
Sound insulation package***	39 dBA	42 dBA	42 dBA	42 dBA	45 dBA	45 dBA
INSTALLATION						
Flush cabinet installation	●	●	●	●	●	●
Built-up-floor capable	●	●	●	●	●	●
Top-/side-mount brackets	●	●	●	●	●	●
GPF3RACK compatible	●	●	●	●	●	●
12-ft. drain hose (optional)	GPF12/WD24X10065	GPF12/WD24X10065	●	●	GPF12/WD24X10065	GPF12/WD24X10065
Side trim installation strips	●	●	●	●	●	●
Front-adjustable rear leveling legs	●	●	●	●	●	●
FLOOR PROTECTION						
Leak Defense with Active Flood Protect	●	●	No	No	No	No
Active Flood Protect	●	●	●	●	●	●
DIMENSIONS HxWxD (IN.)	33-3/8—34-5/8 x 23-3/4 x 24					
Approx. shipping weight (lbs.)	137	121	118	118	118	118

\*Based on DOE test procedure, ANSI/AHAM DW-1.  
\*\*Certified to NSF Standard 184.  
\*\*\*dBA levels based on Owens-Corning IEC-60704 lab testing.

GE PROFILE AND GE BUILT-IN DISHWASHER DIMENSIONS

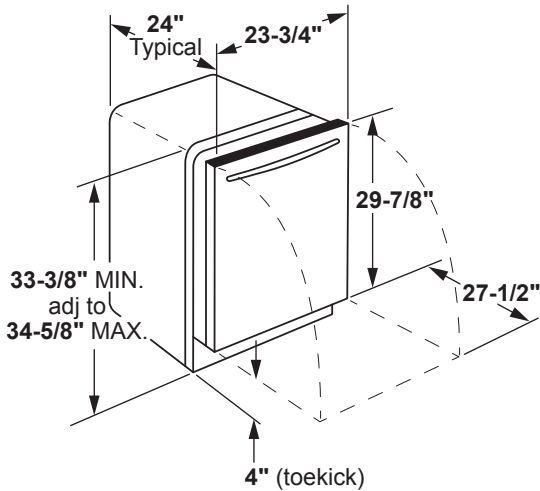

Overall depth including handle: 25.6"

GE Profile (PDT785, PDT775) dishwasher electrical rating

Voltage ..... 120  
Hertz ..... 60  
Total connected load amperage..... 10.2  
Calrod® heater watts max ..... 1,200/400  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

GE Profile (PDT755, PDT715, PDP755, PDP715) dishwasher electrical rating

Voltage..... 120  
Hertz..... 60  
Total connected load amperage..... 6.6  
Calrod heater watts max..... 800/500  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.



Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

See page 294 for warranty information.

geappliances.com 367




GE TOP CONTROL STAINLESS/PLASTIC INTERIOR DISHWASHERS

	GE											
	GDT665SSNSS GDT665SMNES GDT665SFNDS GDT665SGNWW GDT665SGNBB		GDT645SSNSS GDT645SYNFS GDT645SMNES GDT645SGNWW GDT645SGNBB		GDP645SYNFS		GDT635HSRSS		GDT630PYRFS GDT630PGRBB GDT630PGRWW GDT630PMRES	GDP630PYRFS GDP630PGRBB GDP630PGRWW GDP630PMRES	GDT550PYRFS GDT550PGRBB GDT550PGRWW GDT550PMRES	GDT535PSRSS GDT535PGRBB GDT535PGRWW
ENERGY STAR® certified	●		●		●		●		●	●	●	●
CEE Tier 1 qualified	●		●		●		●		●	●	●	●
Energy Factor (EF)	0.8		0.8		0.8		0.8		0.8	0.80	0.8	0.8
Normal wash gallons per cycle*	3.5		3.5		3.5		3.5		3.5	3.5	3.5	3.5
Kilowatt hrs./yr.	270		270		270		270		270	270	270	270
WiFi	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)		Built-in		Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (Requires part no. PBX23W00Y0)
FEATURES												
Interior	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Hybrid stainless steel interior			Gray plastic	Gray plastic	Gray plastic	Gray plastic
Door liner	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel			Gray plastic	Gray plastic	Gray plastic	Gray plastic
Tub liner	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Gray plastic			Gray plastic	Gray plastic	Gray plastic	Gray plastic
Place settings	Up to 16	Up to 16	Up to 16	Up to 16	Up to 16	Up to 16			Up to 16	Up to 16	Up to 16	Up to 14
Front appearance	Top control	Top control	Top control	Top control	Top control	Top control			Top control	Top control	Top control	Top control
Wash system	600 Series	600 Series	600 Series	600 Series	600 Series	600 Series			600 Series	600 Series	500 Series	500 Series
Water filtration	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter			100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter
Hard-food disposer	Piranha™	Piranha	Piranha	Piranha	Piranha	Piranha			Piranha	Piranha	Piranha	Piranha
Wash levels	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Upper/middle/lower			Upper/middle/lower	Upper/middle/lower	Upper/middle/lower	Middle/lower
Dedicated silverware jets mid-wash arm	●	●	●	●	●				●	●	●	●
Automatic temperature control	●	●	●	●	●	●			●	●	●	●
Hot Start	●	●	●	●	●	●			●	●	●	●
Clean Sensor	●	●	●	●	●	●			●	Automatic	●	
Rinse Aid dispenser	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment			Rinse Aid with indicator and adjustment	●	Rinse Aid with indicator and adjustment	●
Clean touch controls	●	●	●	●	●	Cap touch controls			Cap touch controls	Rinse Aid with indicator and adjustment		●
Sabbath/door wake-up mode	●	●	●	●	●	●			●		●	●
End-of-cycle indicators	1 “Clean” light, 1 “Sanitized” light Bi-color LED status light on door	1 “Clean” light, 1 “Sanitized” light Bi-color LED status light on door	1 “Clean” light, 1 “Sanitized” light Bi-color LED status light on door	1 “Clean” light, 1 “Sanitized” light Bi-color LED status light on door	1 “Clean” light, 1 “Sanitized” light Bi-color LED status light on door	1 “Clean” light, 1 “Sanitized” light Bi-color LED status light on door			“1 “Clean” light, 1 “Sanitized” light Bi-color LED status light on door	●	1 “Clean” light, 1 “Sanitized” light Bi-color LED status light on door	1 “Clean” light, 1 “Sanitized” light Bi-color LED status light on door
Exterior status LED										“1 “Clean” light, 1 “Sanitized” light		
Touchpads	8	8	8	8	8	8			8	8	6	4
Cycles and options	5, 11	5, 11	5, 11	5, 11	5, 11	5, 7			5, 7	5, 8	4	4, 4
3-digit countdown display	●	●	●	●	●	●			●	●	●	
Last cycle memory	●	●	●	●	●	●			●	●	●	●
Audible end-of-cycle signal	●	●	●	●	●	●			●	●	●	●
	1-Hour Wash/Auto Sense/ Heavy Wash/Light Wash/ Normal Wash	1-Hour Wash/Auto Sense/ Heavy Wash/Light Wash/ Normal Wash	1-Hour Wash/Auto Sense/ Heavy Wash/Light Wash/ Normal Wash	1-Hour Wash/Auto Sense/ Heavy Wash/Light Wash/ Normal Wash	1-Hour Wash/Auto Sense/ Heavy Wash/Light Wash/ Normal Wash	1 Hour Wash/Auto Sense/ Heavy Wash/Normal Wash/ Rinse			1 Hour Wash/Auto Sense / Heavy Wash/Normal Wash/ Rinse	1-Hour Wash/Auto Sense/ Heavy Wash/Normal Wash/ Rinse	1 Hour Wash/ Auto Sense/Heavy Wash/ Normal Wash	1-Hour Wash/ Heavy Wash/Normal Wash/ Rinse
Cycles												
Options												
Bottle Jets	4	4	4	4	4	4			4	4		
Wash Zones	●	●	●	●	●	●			●	●		
Steam + Sani	●	●	●	●	●	●			●	●	●	
Delay Start	1- to 12-hour	1- to 12-hour	1- to 12-hour	1- to 12-hour	1- to 12-hour	1- to 12-hour			1- to 12-hour	1- to 12-hour	1- to 12-hour	
Wash temp—Boost	●	●	●	●	●	●			●	●	●	●
Wash temp—Sanitize**	●	●	●	●	●	●			●	●	●	●
Dry Boost™/Heated dry	● / ●	● / ●	● / ●	● / ●	● / ●	● / ●			● / -	● / -	● / -	● / -
Lock controls	●	●	●	●	●	●			●	●	●	●
Racking												
Third Rack	●	●							●	●	●	
Rack finish	Silver	Silver	Silver	Silver	Silver	Silver			Silver	Silver	Silver	Silver
Ball-tip tines	●	●	●	●	●	●			●	●	●	●
Upper rack	Easy-touch, adjustable full-extension	Easy-touch, adjustable full-extension	Manual + Adjustable	Manual + Adjustable	Manual + Adjustable	Manual + Adjustable			Manual + Adjustable	Manual + Adjustable	Manual + Adjustable	Standard
Fold-down-tine flexibility	2 multi-position, lower	2 multi-position, lower										
Utility shelves			2 Stem Safe	2 Stem Safe	2 Stem Safe	1 Stem Safe					1 Stem Safe	1 Stem Safe
Lower rack	Multi-position fold-down-tines	Multi-position fold-down-tines	Fixed	Fixed	Fixed	Fixed			Fixed	Fixed	Fixed	Fixed
Angled tines	●	●	●	●	●	●			●	●	●	●
Silverware basket	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers			1-pc. silverware basket with 3 cell covers	1-pc. silverware basket with 3 cell covers	1-pc silverware basket with 3 cell covers	1-pc silverware basket
	Stainless steel with chrome. Stainless steel with chrome. Stainless steel with chrome. Color-matched Color-matched		Stainless steel with chrome. Stainless steel with chrome. Black stainless with chrome Color-matched Color-matched		Color-matched Color-matched	Color-matched			Color-matched Towel bar	Color-matched Pocket handle	Color-matched Towel bar	Color-matched Towel bar
Handle color												
Handle design	Designer style	Pocket handle	Designer style	Pocket handle	Pocket handle	Towel bar						
DRY												
Hidden vent with fan	●	●	●	●	●							
QUIET												
Sound insulation package***	46 dBA	46 dBA	48 dBA	48 dBA	48 dBA	50 dBA			50 dBA	50 dBA	52 dBA	55 dBA
INSTALLATION												
Flush cabinet installation	●	●	●	●	●	●			●		●	●
Built-up-floor capable	●	●	●	●	●	●			●	●	●	●
Top-/side-mount brackets	●	●	●	●	●	●			●	●	●	●
GPF3RACK compatible											●	
12-ft. drain hose (optional)	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065	●			●	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065
Side trim installation strips	Included	Included	Included	Included	Included	Optional			Optional	Optional	Optional	Optional
FLOOR PROTECTION												
Active Flood Protect	●	●	●	●	●	●			●	●	●	●
DIMENSIONS HXWXD (IN.)	33-3/8—34-5/8 x 23-3/4 x 24	33-3/8—34-5/8 x 23-3/4 x 24	33-3/8—34-5/8 x 23-3/4 x 24	33-3/8—34-5/8 x 23-3/4 x 24	33-3/8—34-5/8 x 23-3/4 x 24	33-3/8—34-5/8 x 23-3/4 x 24			33-3/8—34-5/8 x 23-3/4 x 24	33-3/8—34-5/8 x 23-3/4 x 24	33-3/8—34-5/8 x 23-3/4 x 24	33-3/8—34-5/8 x 23-3/4 x 24
Approx. shipping wt. (lbs.)	112	112	112	112	112	73			72	73	70	65

\*Based on DOE test procedure, ANSI/AHAM DW-1.  
\*\*Certified to NSF Standard 184.  
\*\*\*dBA levels based on Owens-Corning IEC-60704 lab testing.

GE BUILT-IN DISHWASHER DIMENSIONS (IN INCHES)

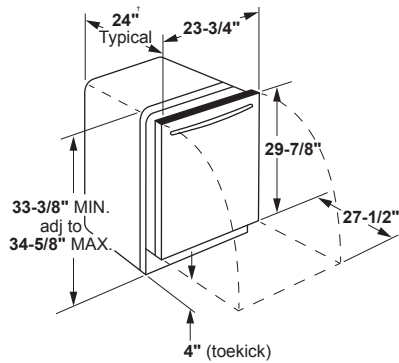

Overall depth including handle: 25.6"

GE (GDT635, GDT630, GDP630, GDT550, GDT535) dishwasher electrical rating

Voltage .....	120
Hertz .....	60
Total connected load amperage .....	6.6
Calrod® heater watts max .....	500/800

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire.  
This appliance must be grounded for safe operation.

GE (GDT665, GDP665, GDT645, GDP645) dishwasher electrical rating

Voltage .....	120
Hertz .....	60
Total connected load amperage .....	6.6
Calrod heater watts max .....	500/800

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire.  
This appliance must be grounded for safe operation.



GE STAINLESS/PLASTIC INTERIOR DISHWASHERS

	ADA COMPLIANT		GE					
	GDT225SSLSS GDT225SGLWW GDT225SGLBB	GDT226SILII GDT226SSLSS GDT226SGLWW GDT226SGLBB	GDF450PSRSS GDF450PGRWW GDF450PGRBB	GDF510PSRSS GDF510PGRWW GDF510PGRBB GDF511PSRSS*** GDF511PGRWW*** GDF511PGRBB***	GDF535PSRSS GDF535PGRWW GDF535PGRBB GDF535PGRCC	GDF550PSRSS GDF550PGRBB GDF550PGRWW GDF550PMRES		GDF645SMNES GDF645SSNSS
ENERGY STAR® certified	●	●	●	●	●	●		●
CEE Tier 1 qualified	●	●	●	●	●	●		●
Energy Factor (EF)	0.80	0.80	0.70	0.80	0.80	0.80		0.80
Normal wash gallons per cycle*	3.5	3.5	5.0	3.5	3.5	3.5		3.5
Kilowatt hrs./yr.	270	270	307	270	270	270		270
ADA	●	●						
WiFi	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)	Optional (requires part no. PBX23W00Y0)		Optional (requires part no. PBX23W00Y0)
FEATURES								
Interior	Stainless steel	Stainless steel	Plastic	Plastic	Plastic	Gray plastic		Stainless steel
Door liner	Stainless steel	Stainless steel	Plastic	Plastic	Plastic	Gray plastic		Stainless steel
Tub liner	Stainless steel	Stainless steel	Plastic	Plastic	Plastic	Gray plastic		Stainless steel
Place settings	Up to 12	Up to 12	Up to 12	Up to 12	Up to 14	Up to 16		Up to 16
Front appearance	Top control	Top control	Front control	Front control	Front control	Front control		Front control
Wash system	3-level standard	3-level standard	400 Series	500 Series	500 Series	500 Series		600 Series
Water filtration	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter	100% with removable filter		100% with removable filter
Hard-food disposer	Piranha™	Piranha	Piranha	Piranha	Piranha	Piranha		Piranha
Wash levels	Upper/middle/lower	Upper/lower/middle	Middle/lower	Middle/lower	Middle/lower	Upper/middle/lower		Upper/middle/lower
Dedicated silverware jets mid-wash arm			●	●	●	●		●
Dual pumps and motors	●	●	●	●	●	●		●
Automatic temp. control	●	●	●	●	●	●		●
Hot Start	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic		Automatic
Clean Sensor	●	●				●		●
Rinse Aid dispenser	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment		Rinse Aid with indicator and adjustment
Clean touch controls								●
Sabbath/door wake-up mode	●	●	●	●	●	●		●
End-of-cycle indicators	1 "Clean" light, 1 "Sanitized" light	"1 "Clean" light, 1 "Sanitized" light	1 "Clean" light	1 "Clean" light	"1 "Clean" light, 1 "Sanitized" light	"1 "Clean" light, 1 "Sanitized" light		"1 "Clean" light, 1 "Sanitized" light
Touchpads	4	4	2	4	4	6		8
Cycles and options	3	3	3	4	4	4, 6		5,11
3-digit countdown display	●	●		●		●		●
Last cycle memory	●	●	●	●	●	●		●
Audible end-of-cycle signal	●	●				●		●
Cycles	Auto Sense/ Heavy Wash/ Light Wash	Auto Sense/ Heavy Wash/ Light Wash	1-Hour Wash/ Heavy Wash/ Normal Wash	1-Hour Wash/ Heavy Wash/ Normal Wash/Rinse	1-Hour Wash/ Heavy Wash/ Normal Wash/Rinse	1-Hour Wash/Auto Sense/Heavy Wash/ Normal Wash		1-Hour Wash/Auto Sense/ Heavy Wash/Light Wash/ Normal Wash
Options								
Bottle Jets								4
Wash Zones								●
Steam + Sani					●	●		●
Delay Start	1- to 12-hour	1- to 12-hour				1- to 12-hour		1- to 12-hour
Wash temp—Boost	●	●		●	●			●
Wash temp—Sanitize**	●	●			●	●		●
Dry Boost™/Heated Dry			● / ●	● / ●	● / ●	● / -		● / ●
Lock controls	●	●	●	●	●	●		●
Racking								
Third Rack						Optional		
Rack finish	Gray	Gray	Silver	Silver	Silver	Silver		Silver
Ball-tip tines	●			●	●	●		●
Upper rack	Manual + Adjustable	Manual + Adjustable	Standard	Standard	Standard	Manual + Adjustable		Manual + Adjustable
Utility shelves	1 cup shelf	1 cup shelf			Stem Safe	1 Stem Safe		2 Stem Safe
Lower rack	Fixed		Fixed	Fixed	Fixed	Fixed		Fixed
Angled tines	●	●	●	●	●	●		●
Silverware basket	1-pc. silverware basket with 2 cell covers	1-pc. silverware basket with 2 cell covers	1-pc. silverware basket	1-pc. silverware basket	1-pc. silverware basket	1-pc. silverware basket with 3 cell covers		1-pc. silverware basket with 3 cell covers
		Customer supplied handle (panel model). Stainless steel with chrome						
Handle color	Color-matched	Color-matched	Color-matched	Color-matched	Color-matched	Color-matched		Color-matched
Handle design	Pocket	Designer style	Integrated	Integrated	Integrated	Integrated		Recessed
DRY								
Calrod® heating element	●	●	800/500	800/500	800/500	800/500		800/500
QUIET								
Sound insulation package†	51 dBA	51 dBA	60 dBA	59 dBA	55 dBA	52 dBA		48 dBA
Tub insulation—blanket	●	●			●	●		●
INSTALLATION								
Installation	Flush cabinet installation	Flush cabinet installation	Flush cabinet installation	Flush cabinet installation	Flush cabinet installation	Flush cabinet installation		Flush cabinet installation
Built-up-floor capable	●	●	●	●	●	●		●
Top-/side-mount brackets	●	●	●	●	●	●		●
GPF3RACK compatible						●		
12-ft. drain hose (optional)	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065	GPF12/WD24X10065		GPF12/WD24X10065
			Optional: White WD08X10096 Optional: Black WD08X10094	Optional: White WD08X10096 Optional: Black WD08X10094	Optional: White WD08X10096 Optional: Black WD08X10094	Optional: White WD08X10096 Optional: Black WD08X10094		
Side trim installation strips	Factory installed	Factory installed						Included
FLOOR PROTECTION								
Active Flood Protect			●	●	●	●		●
DIMENSIONS HxWxD (in.)	32-1/4—34-5/8 x 23-3/4 x 23-1/2		33-3/8—34-5/8 x 23-3/4 x 24					33-3/8—34-5/8 x 23-3/4 x 24
Approx. shipping weight (lbs.)	96	96	65	65	65	68		112

\*Based on DOE test procedure, ANSI/AHAM DW-1.  
\*\*Certified to NSF Standard 184.  
\*\*\*GDF511 models have power cords attached.  
†dBA levels based on Owens-Corning IEC-60704 lab testing.

GE STAINLESS/PLASTIC INTERIOR DISHWASHERS

GE (GDF550, GDF535, GDF511, GDF510, GDF450) dishwasher electrical rating

Voltage .....120  
Hertz .....60  
Total connected load amperage .....6.6  
Calrod heater watts max.....500/800  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire.  
This appliance must be grounded for safe operation.


GE (GDF645) dishwasher electrical rating

Voltage .....120  
Hertz .....60  
Total connected load amperage .....7.2  
Calrod heater watts max.....500/800  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire.  
This appliance must be grounded for safe operation.

ADA-compliant models (GDT225SGL/ GDT226SSL) electrical rating

Voltage AC .....120  
Hertz .....60  
Total connected load amperage .....6.7  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire.  
This appliance must be grounded for safe operation.

UFAS/ADA-COMPLIANT

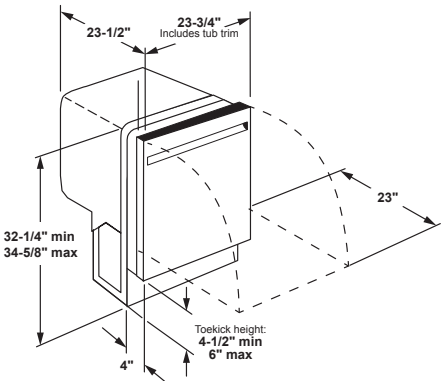

Overall depth including handle: 25.6".






GE DISHWASHER

GE	
GSD2100VWW GSD2100VCC GSD2100VBB	
Energy Factor (EF)	0.70
Normal wash gallons per cycle*	5.0
Kilowatt hrs./yr.	307
FEATURES	
Tub and door liner	Permatuf™ plastic
Wash system	
Wash levels	2
Water filtration	2-stage
Self-cleaning filtration	●
Hard-food disposer	Piranha™
Rinse Aid dispenser	●
Cycle progress indicator(s)	Dial
Cycles and options	5,2
Cycles	
Heavy Wash	Dial
Normal Wash	Dial
Light Wash	Dial
Plate Warmer	Dial
Rinse Only	Dial
Options	
Heated Dry	Rocker
Hot Start	Dial
Racking	
Upper rack	Standard
Lower rack	Standard
Silverware basket	Deluxe
Side-mount installation kit	GPF65
Latch	●
Handle color	Color-matched
DRY	
Calrod® heating element	●
QUIET	
Sound package**	64 dBA
APPEARANCE	
Color panels—door & access	Trimless
WEIGHTS & DIMENSIONS	
Height with legs retracted (in.)	34
Height with legs removed (in.)	33-13/16
Height with legs extended (in.)	35
Overall width (in.)	24
Overall depth (in.)	25-3/4
Approx. shipping weight (lbs.)	70

\*Based on DOE test procedure, ANSI/AHAM DW-1.  
\*\*dBA levels based on Owens-Corning IEC-60704 lab testing.

GE BUILT-IN DISHWASHER DIMENSIONS (IN INCHES)

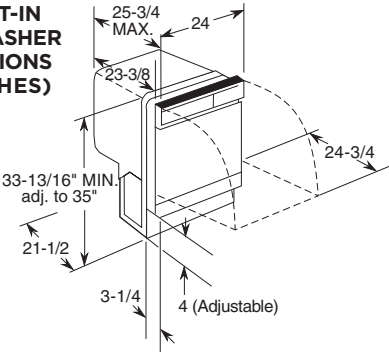

Electrical rating 3000 and 2100 Series


Voltage AC .....120  
Hertz .....60  
Total connected load amperage.....6.2  
Calrod heater watts .....500  
For use on adequately wired 120V, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

GE SPACEMAKER® UNDER-THE-SINK DISHWASHER

GE	
GSM2260VSS GSM2200VWW GSM2200VBB	
Energy Factor (EF)	0.70
Normal wash gallons per cycle*	5.0
Kilowatt hrs./yr.	307
FEATURES	
Tub and door liner	Permatuf plastic
Wash levels	2
Food disposer	●
Cycles	
Pots & Pans	●
Normal Wash	●
Plate Warmer	Dial
Rinse Only	Dial
Light Wash	Dial
Options	
Heated Dry	●
Hot Start	Dial
Racking	
Upper rack	Spacemaker
Lower rack	Standard
Silverware basket	Deluxe
Control type	Turn-to-start
Cycle progress indicator	Dial
Pushbuttons	4
Solid surface installation kit	GPF65
Rinse Aid dispenser	●
Door latch	●
Handle color	Color-matched
DRY	
Calrod heating element	●
QUIET	
Sound package**	64 dBA
APPEARANCE	
Color panels—door & access	Trimless
WEIGHTS & DIMENSIONS	
Height w/legs retracted (in.)	34
Overall width (in.)	24
Overall depth (in.)	25-3/4
Approx. shipping weight (lbs.)	60


\*Based on DOE test procedure, ANSI/AHAM DW-1.  
\*\*dBA levels based on Owens-Corning IEC-60704 lab testing, 2009-2010.

CABINET CUTOUT FOR SINK (IN INCHES)

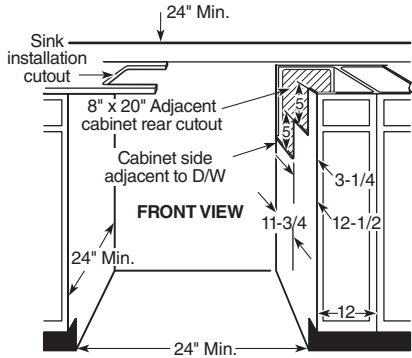

Cabinet cutouts for offset single- and double-bowl sinks. Dishwasher not provided with complete enclosure. Enclosures for sides, top, bottom, and back must be provided by installer at time of installation.

CABINET ROUGH-IN (IN INCHES)

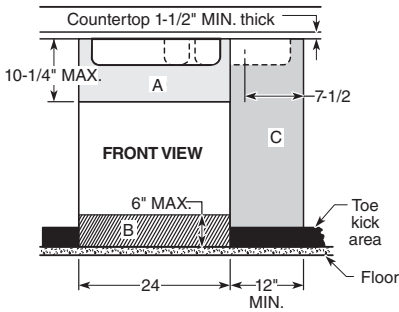


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

GE PROFILE™ 18" DISHWASHER

GE PROFILE	
PDT145SGLBB PDT145SGLWW PDT145SSLSS	
<b>ENERGY STAR® certified</b>	●
CEE Tier 1 qualified	●
Energy Factor (EF)	0.80
Normal wash gallons per cycle*	3.5
Kilowatt hrs./yr.	270
ADA	●
FEATURES	
Interior/Door liner/Tub liner	Stainless steel
Place settings	8
Front appearance	Flat door
Wash system	
Water filtration	100% with removable filter
Hard-food disposer	Piranha
Wash levels	Upper/middle/lower
Dual pumps and motors	●
Automatic temp. control	●
Hot Start	Automatic
Sensor	Clean sensor
Rinse Aid dispenser	Rinse Aid with indicator and adjustment
Electronic controls	●
Sabbath/Door wake-up mode	●
End-of-cycle indicators	1 "Clean" light, 1 "Sanitized" light
Cycles/Options	3
3-digit countdown display	●
Last cycle memory	●
Audible end-of-cycle signal	●
Cycles	
Options	Auto Sense/Heavy/Light
Delay Start	1-12-hr
Wash temp—Boost	●
Wash temp—Sanitize (NSF**)	●
WiFi Connect capable	Optional (requires part no. PBX23W00Y0)
Lock controls	●
Racking	
Rack finish	Gray
Ball-tip tines	●
Upper rack	Adjustable
Utility shelves	Stem Safe
Lower rack	Fold-down tines
Angled tines	●
Silverware basket	1-pc. with 1 cell cover
Handle color	Color-matched
Handle design	Pocket
DRY	
Hidden heater	●
QUIET	
Sound insulation package***	47 dBA
Tub insulation—blanket	●
INSTALLATION	
Built-up-floor capable	●
Top-/side-mount brackets	Included
12-ft. drain hose	GPF12/WD24X10065
Side trim installation strips	Factory installed
WEIGHTS & DIMENSIONS	
Height/Width/Depth (in.)	32-1/2-34-5/8 x 17-3/4 x 23-1/2
Approx. shipping wt. (lbs.)	83

\*Based on DOE test procedure, ANSI/AHAM DW-1.  
\*\*Certified by National Sanitation Foundation.  
\*\*\*dBA levels based on Owens-Corning IEC-60704 lab testing, 2009-2010.

18" SPACEMAKER BUILT-IN DIMENSIONS (IN INCHES)



\*Width from 17-5/8" to 18".  
\*\*Meets ADA countertop height requirement of 34".

18" dishwashers electrical rating

Voltage AC .....120  
Hertz .....60  
Total connected load amperage.....8.9  
For use on adequately wired 120V, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

GE PORTABLE DISHWASHERS

GE		
GPT225SSLSS GPT225SGLWW GPT225SGLBB		
GPT145SSLSS		
Energy Factor (EF)	0.8	0.8
Normal wash gallons per cycle*	3.5	3.5
Kilowatt hrs./yr.	270	270
FEATURES		
Tub and door liner	Stainless steel	Stainless steel
Wash system	3-level standard	3-level standard
Wash levels	Upper/middle/lower	Upper/middle/lower
Water filtration	3-stage manual clean filtration	3-stage manual clean filtration
Hard-food disposer	Piranha	Piranha
Rinse Aid dispenser	Rinse Aid with indicator and adjustment	Rinse Aid with indicator and adjustment
Cycles		
Options	Auto/Heavy/Light	Auto/Heavy/Light
Heated Dry	Condensate dry	Condensate dry
Hot Start	Automatic	Automatic
Racking (upper/lower)		
Silverware basket	1-pc. w/cell covers	1-pc. w/cell covers
Cycle progress indicator(s)	●	●
Touchpads	●	●
Latch	Center pull	Center pull
Handle color	Color-matched	Color-matched
QUIET		
Sound insulation package**	54 dBA	52 dBA
APPEARANCE		
Side panel colors	Black, White, Black	Black
Color panels—door & access	SS, White, Black	SS
Decorative wood laminate top	Black, Grey, Black	Black
WEIGHTS & DIMENSIONS		
Overall height w/legs extended (in.)	36	36
Overall width cabinet (in.)	24	18
Overall depth (in.)	25-3/8	25-3/8
Overall width countertop (in.)	23-5/8	18
Approx. shipping weight (lbs.)	177	177

\*Based on DOE test procedure, ANSI/AHAM DW-1.  
\*\*dBA levels based on Owens-Corning IEC-60704 lab testing, 2009-2010.

PORTABLE DISHWASHER DIMENSIONS (IN INCHES)

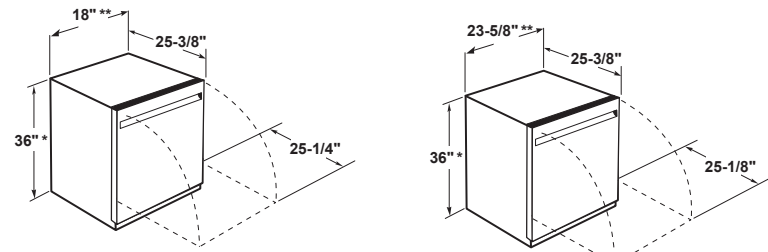

\*Includes top and wheels  
\*\*Includes countertop

GPT145 Electrical rating

Voltage AC .....120  
Hertz .....60  
Total connected load amperage.....8.9


For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation..

GPT225 Electrical rating

Voltage AC .....120  
Hertz .....60  
Total connected load amperage.....8.9


For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

CABINET ROUGH-IN (IN INCHES) CONT.




Either single- or double-bowl sink may be used, centered or offset, as shown in the front illustration above. The 20-1/2" max. dimension from wall to front of sink bowl must be accurate if dishwasher is to fit properly under sink. Water lines to sink faucet and drain from sink can be run through area "A". HOT WATER line to dishwasher is installed in area "B". Garbage disposer, water lines to faucet, trap, waste air gap and water cut-off valve are installed in 12"-wide cabinet shown in area "C". Sink opening for garbage disposer must be dimensioned as shown in front view, area "C" above (7-1/2"). This will provide clearance for disposer and plumbing in cabinet "C" when using double-bowl sink. If the sink bowl is more than 20-1/2" max. specified distance from the wall, or if the base cabinet is less than the 24" min. depth from the wall, a gap between the tub front flange and the front of the base cabinet may result.

PLUMBING/ELECTRICAL ROUGH-IN (IN INCHES)




**Plumbing:** Hot Water Only: Use 3/8" O.D. copper tubing min. inlet line. Water valve has 3/8" internal threads. Hand cut-off valve is recommended.  
**Electrical:** Fuse circuit with 15 amp or 20 amp standard fuse or circuit breaker. Total amp load is 6.2. Dishwasher operates on 120V, 60 Hz power. Two-wire cable (14 ga. min.) with ground must be installed.  
**Note:** All rough-in, both plumbing and electrical, must be completed before the dishwasher is installed. All plumbing and electrical work must be in accordance with local codes.  
**Specifications:** Inlet Water Temperature Recommended: Minimum 120°F at dishwasher. Inlet Water Pressure Required: 15 to 120 lbs./sq. in.

ROUGH-IN FOR INSTALLATION WITH DISPOSER (IN INCHES)

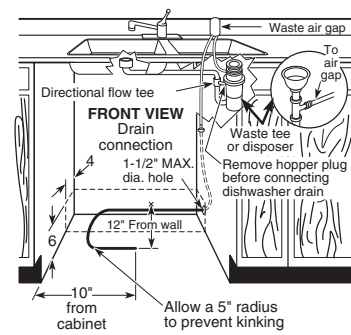

A close-fitting elbow or special shallow sink strainer is necessary to provide clearance between sink drain and dishwasher. Dishwasher furnished with 1/2" I.D. drain hose, 78" long. If using copper tubing, 2" length of 1/2" I.D. rubber hose must be provided to connect copper tubing to pump outlet. Disposer should have 7/8" I.D. dishwasher drain connector.

REAR VIEW PLUMBING ARRANGEMENT (IN INCHES)

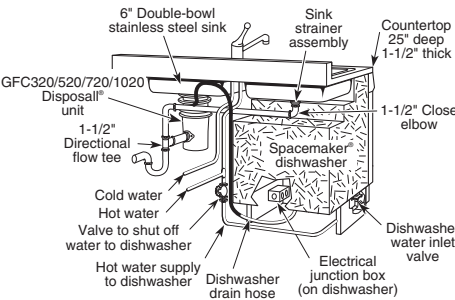

DISHWASHER AND COMPACTOR ACCESSORIES


	GE Profile™ Stainless Interior	GE Stainless Steel Interior	GE Tall Tub Hybrid and Plastic Interior	GE Plastic Standard Tub	18" Dishwashers	Spacemaker® Dishwashers	24" ADA
GPFCORD—5.2' power cord	●	●	●	●	●	●	●
WX09X70911—7.9' power cord	●	●	●	●	●	●	●
GPF10S & WX09X70910—10' drain hose for standard tub	●	●	●	●	●	●	●
GPF12 (WD24X10065)—12' drain hose for plastic tall tub	●	●	●	●	●	●	●
Solid surface installation kit	Included	Included	Included	Included	Included	Included	Included
GPF3RACK	Select	Select	Select	Select	Select	Select	Select
OLD: PBX10W00Y0 Connect Plus	Sold separately	Sold separately	Sold separately	Sold separately	Sold separately	Sold separately	Sold separately
NEW: PBX23W00Y0 U+ Connect	Sold separately	Sold separately	Sold separately	Sold separately	Sold separately	Sold separately	Sold separately

DISHWASHER ROUGH-IN INFORMATION FOR MODEL PDT145SGL/SSL

**Note:** Dishwasher must not be installed more than ten feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes. Most of the installation work should be done before the dishwasher is moved into place. First, select a location as close to the sink as possible for ready access to water and drain lines. For proper operation and appearance of the dishwasher, the cabinet opening should be square and have dimensions as shown in Figure 1. If the dishwasher is to be installed in a corner, there must be sufficient clearance to open the door as shown in Figure 2. A minimum clearance of 2" is recommended.

Rough-in the water, electrical, and drain lines before proceeding with installation. The lines should run straight to their connections on the dishwasher.

**Note:** Make sure that the lines do not cross in front of the dishwasher motor or its legs.

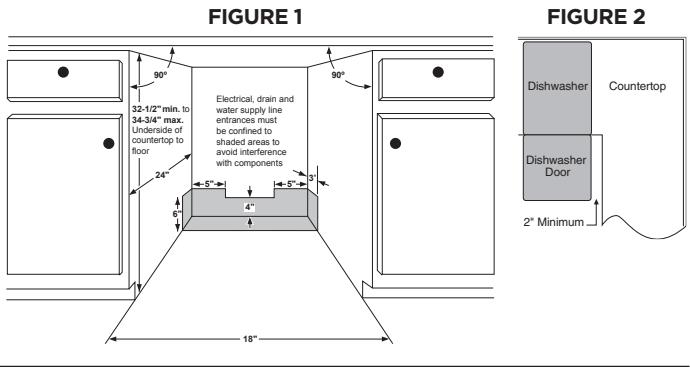


DISHWASHER ROUGH-IN INFORMATION

**Note:** Dishwasher must not be installed more than ten feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

The power cord and connections must comply with the National Electrical Code Section 422 and/or local codes and ordinances. The cord must be no longer than six feet from the junction box to the receptacle.

GDT225SGL/SSL, GDT226SGL/SSL/SIL INSTALLATION INFORMATION (IN INCHES)


The rough cabinet opening must be at least 24" deep, 24" wide and approximately 32-1/2" to 34-3/4" high from floor to underside of the countertop.

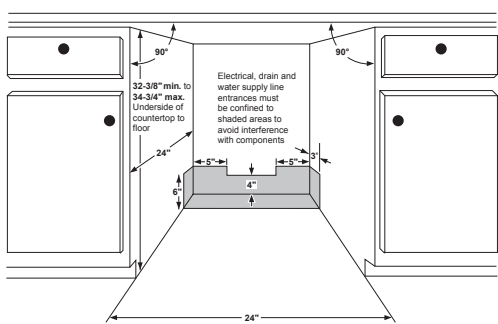

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

DISHWASHER INSTALLATION INFORMATION

GE PROFILE, GE STAINLESS STEEL, GE HYBRID STAINLESS STEEL AND PLASTIC TUB DISHWASHERS INSTALLATION INFORMATION (IN INCHES)

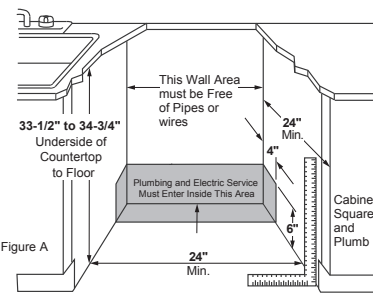

Listed by Underwriters Laboratories

GE DISPOSALL® FOOD WASTE DISPOSERS

FEATURES	GE CONTINUOUS FEED										BATCH FEED
	GFC1020N	GFC720N	GFC530N	GFC535N	GREEN05P	GFC520N	GFC525N	GFC320N	GFC325N	GFB760N	
Motor horsepower	1	3/4	1/2	1/2	1/2	1/2	1/2	1/3	1/3	3/4	
Control method	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Magnetic sink stopper	
Feed type	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Batch	
Power connection	Direct wire	Direct wire	Direct wire	Power cord	Power cord	Direct wire	Power cord	Direct wire	Power cord	Direct wire	
Impellers	●	●	●	●	●	●	●	●	●	●	
Dual-swivel	●	●	●	●	●	●	●	●	●	●	
Jam-resistant	●	●	●	●	●	●	●	●	●	●	
Stainless steel	●	●	●	●	●	●	●	●	●	●	
Armature shaft material	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	
Grinding speed (RPMs)*	Over 2,800	Over 2,700	Over 2,600	Over 2,600	Over 2,600	Over 2,600	Over 2,600	Over 2,300	Over 2,300	Over 2,700	
Capacity	Super	Super	Super	Extra-large	Extra-large	Large	Large	Large	Large	Super	
Mounting type	Easy Mount	Easy Mount	Easy Mount	Easy Mount	Universal 3-bolt mount	Easy Mount	Easy Mount	Easy Mount	Easy Mount	Easy Mount	
3-bolt-mount adapter kit included	●	●	●	●	●	●	●	●	●	●	
Turntable material	Stainless	Stainless	Stainless	Stainless	Stainless	Galv. steel	Galv. steel	Galv. steel	Galv. steel	Stainless	
Two-level precut	●	●	●	●	●	●	●	●	●	●	
Stainless steel sink flange	●	●	●	●	●	●	●	●	●	●	
Manual reset overload protector	●	●	●	●	●	●	●	●	●	●	
Splash guard	●	●	●	●	●	●	●	●	●	●	
Sink stopper	●	●	●	●	Stainless	●	●	●	●	●	
Drain Boost	●	●	●	●	●	●	●	●	●	●	
Dishwasher drain connector	●	●	●	●	●	●	●	●	●	●	
Drain elbow	●	●	●	●	●	●	●	●	●	●	
QUIET	●	●	●	●	●	●	●	●	●	●	
Sound reduction technology	●	●	●	●	●	●	●	●	●	●	
WEIGHTS & DIMENSIONS											
Approx. shipping weight (lbs.)	14.9	12.45	9.6	9.9	10.1	8.8	9.1	8.4	8.7	13.75	
Net weight (lbs.)	13.2	10.7	8.05	8.35	9.1	7.8	8.1	7.4	7.7	11	
Dishwasher inlet diameter (in.)	1	1	1	1	3/4	1	1	1	1	1	
Drain outlet diameter (in.)	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	
POWER RATINGS											
Volts, Hertz, Amps	120; 60; 7.0	120; 60; 6.0	120; 60; 4.5	120; 60; 4.5	120; 60; 4.5	120; 60; 4.5	120; 60; 4.5	120; 60; 4.0	120; 60; 4.0	120; 60; 6.0	
ACCESSORIES											
Power cord	PM3X215	PM3X215	PM3X215	Equipped	Equipped	PM3X215	Equipped	PM3X215	Equipped	PM3X215	
WARRANTY											
One-year limited replacement warranty**	●	●	●	●	●	●	●	●	●	●	
Additional limited parts warranty**	7-year	5-year	3-year	3-year	3-year	2-year	2-year			5-year	

\*Based on RPM testing of cleared GE and competitive models.  
\*\*See written warranty for details.


Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

BUILT-IN COMPACTORS


FEATURES	UCG1520NSS UCG1500NWW UCG1500NBB UCG1510NII
Cycle time	30 seconds maximum
Motor horsepower	1/3
Compression ratio (average)	75% reduction of volume
Ram force (lb.) (max.)	2,300
Front level legs and rear wheels	●
Capacity	1.4 cu. ft.
Side-release bin	●
Toe/foot pedal drawer opener	●
Lock/start control w/removable key	●
Automatic anti-jam	●
Slide-out drawer	●
APPEARANCE	
Hidden controls	●
Colors available**	SS, WW, BB, II
	Stainless White Black Black
Toe kick	●
WEIGHTS & DIMENSIONS	
Total shipping weight (lbs.)	152
Total appliance weight (lbs.)	141
Overall height (in.)	33-3/4 to 35
Overall width (in.)	14-7/8
Overall depth (in.)	24
Cutout dimensions H x W x D (in.)	34-35 x 15 min x 24
Clearance for drop-down drawer side	6" or more on right side
Drawer extension for removal	23" or more in front of appliance
ACCESSORIES	
Compactor bags (5 included)	WC60X5017 WC17X10019, WC17X10011, WC17X10006
Stainless toe kick (3 pieces required)	●
WARRANTY	
One-year limited warranty*	●

\*See written warranty for details.  
\*\*SS = Stainless, WW = White, BB = Black, II = Custom panel-ready

COMPACTOR DIMENSIONS (IN INCHES)



Locate the outlet 18" min. from the floor, 3" min. from either side.



Clearances: Allow 6" clearance to a vertical wall on the right side for bag removal. Allow 23" at the front for a full drawer opening.




FRONT LOAD WASHERS


	GE			
	GFW850SPN GFW850SSN	GFW650SPN GFW650SSN	GFW550SPN GFW550SSN	CONTRACT EXCLUSIVE GFW510SCN
CAPACITY				
Cubic feet	5.0 DOE*	4.8 DOE*	4.8 DOE*	4.5 DOE*
FEATURES				
ENERGY STAR® certified	●	●	●	●
UFAS/ADA**	●/●	●/●	●/●	●/●
UltraFresh Vent System	●	●	●	●
Wash/rinse temperatures	5	5	5	5
Water levels	Automatic	Automatic	Automatic	Automatic
Reversible door	●	●	●	●
Vibration control	dBT™	dBT	dBT	dBT
Internal water heater	●	●	●	●
Custom cycle (My Cycle)	Using SmartHQ™ App	Using SmartHQ App	●	●
Steam Assist	●	●	●	●
Cold Wash Technology	●	●	●	●
Number of cycles	12	12	10	10
Sanitize with Allergen	●	●	●	●
Sanitize	●	●	using Oxi	using Oxi
Bulky/Bedding	●	●	●	●
Active Wear	●	●	●	●
Time Saver	●	●	●	●
1 Step Wash + Dry	●	●	●	●
More Water	Using SmartHQ App	Using SmartHQ App	●	●
Tumble Care	●	●	●	●
Delay Wash	●	●	●	●
SmartDispense™	●	●	●	●
Detergent dispenser (liquid/powder)	Flow-thru timed	Flow-thru timed	Flow-thru timed	Flow-thru timed
Bleach dispenser	Flow-thru timed	Flow-thru timed	Flow-thru timed	Flow-thru timed
Fabric softener dispenser	Flow-thru timed	Flow-thru timed	Flow-thru timed	Flow-thru timed
Pretreat dispenser	SmartDispense™	SmartDispense	●	●
Control type	Electronic LED	Electronic LED	Electronic LED	Electronic LED
End-of-cycle signal	Adjustable	Adjustable	Adjustable	Adjustable
Wash/spin speed combinations	5	5	5	5
Max. RPM spin speed	1,300	1,300	1,300	1,300
Water temperature system	Auto Temp Control	Auto Temp Control	Auto Temp Control	Auto Temp Control
Colors/Normal	●	●	●	●
Delicates/Hand Wash	●	●	●	●
Whites	●	●	●	●
Optional soil levels	5	5	5	5
Self Clean/Tub Clean	●	●	●	●
Extra Rinse	●	●	●	●
Add a Garment	●	●	●	●
Quick Wash	●	●	●	●
Adaptive capabilities	Load size	Load size	Load size	Load size
Washer interior light	LED	LED	●	●
Cycle countdown	●	●	●	●
Cycle status lights	●	●	●	●
Prewash/Presoak	Prewash	Prewash	Prewash	Presoak
Stainless steel wash basket	●	●	●	●
Handle	Outside pocket	Outside pocket	Outside pocket	Outside pocket
Inlet hoses	●	●	●	Included
Optional pedestal	GFP1528	GFP1528	GFP1528	GFP1528
Optional riser	GFR0728	GFR0728	GFR0728	GFR0728
Optional stacking kit	GFA28KITN	GFA28KITN	GFA28KITN	GFA28KITN
WiFi Connect	●	●	●	●
APPEARANCE				
Colors available***	WW RS	WW SN	WW	WW
WEIGHTS & DIMENSIONS				
Approx. shipping weight (lbs.)	263	256	256	256
Flexible installation	Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side
POWER/RATINGS				
Integrated Modified Energy Factor (IMEF)	2.76	2.76	2.76	2.76
Integrated Water Factor (IWF)	3.00	3.00	3.00	3.00
Circuit breaker or Time-delay fuse	15 or 20 amps	15 or 20 amps	15 or 20 amps	15 or 20 amps
Volts/Hertz	120V; 60Hz	120V; 60Hz	120V; 60Hz	120V; 60Hz

\*Department of Energy.  
\*\*ADA-qualified based on Americans with Disabilities Act. UFAS compliant with the Uniform Federal Accessibility Standards.  
\*\*\*WW = White, DG = Diamond Gray, RS = Sapphire Blue, SN = Satin Nickel.

WASHER DIMENSIONS: GFW850

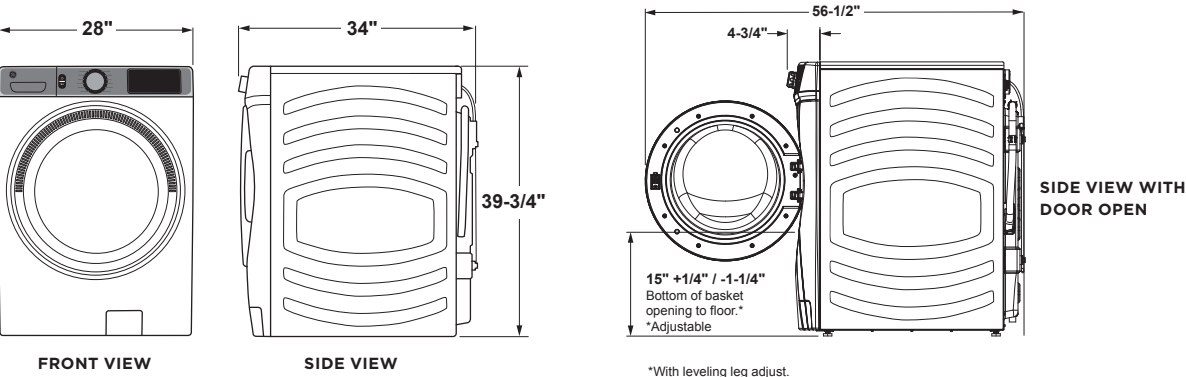

WASHER DIMENSIONS: GFW650, GFW550, GFW510

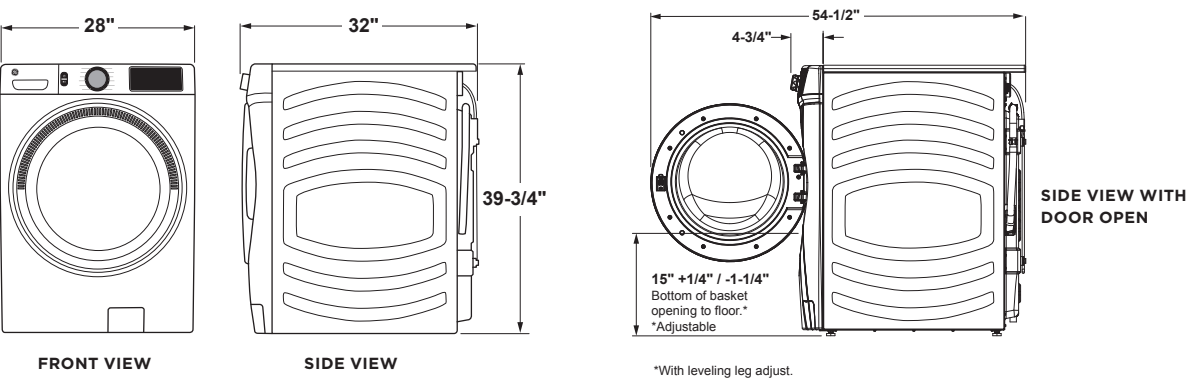


GE FRONT LOAD WASHER/DRYER PEDESTALS AND RISERS

PEDESTAL DIMENSIONS

For 28" width front load washers and dryers.

- GFP1528SNWW-White
- GFP1528PNDG-Diamond Gray
- GFP1528PNSN-Satin Nickel
- GFP1528PNRS-Sapphire Blue

This optional 16" pedestal raises the door opening and height of the washer or dryer.

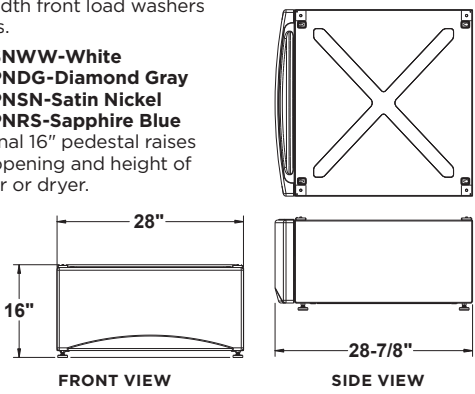


RISER DIMENSIONS

For 28" width front load washers and dryers.

- GFR0728SNWW-White
- GFR0728PNDG-Diamond Gray
- GFR0728PNSN-Satin Nickel
- GFR0728PNRS-Sapphire Blue


This optional 7" riser raises the door opening and height of the washer or dryer while remaining ADA compliant.

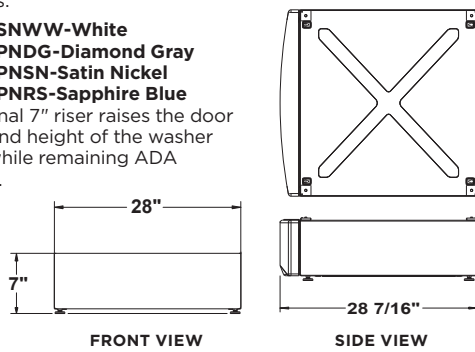

GE FRONT LOAD WASHERS/DRYERS (STACKED)

STACKED DIMENSIONS (IN INCHES)

- GFW850/GFD85, GFW650/GFD65, GFW550/GFD55, GFW510/GFD55/GFV55

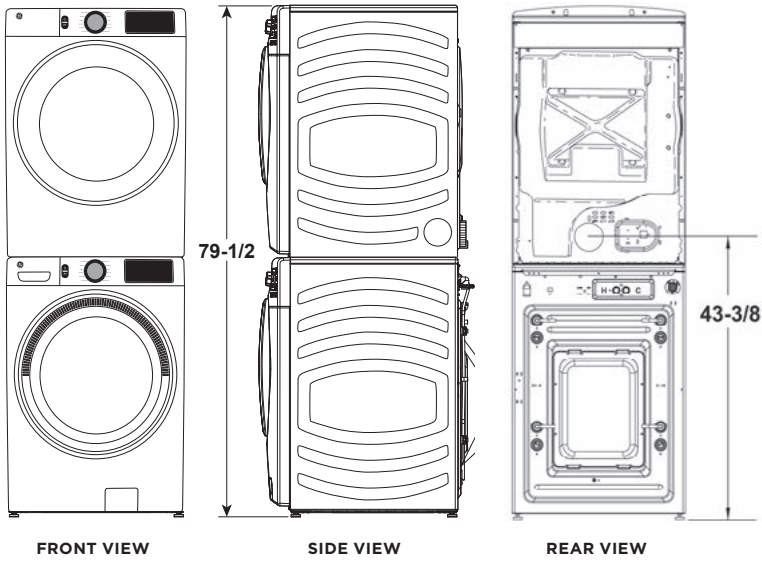


FRONT LOAD DRYERS

	GE		
	GFD85ESPN/GSPN GFD85ESSN/GSSN	GFD65ESPN/GSPN GFD65ESSN/GSSN	GFD55ESPN/GSPN GFD55ESSN/GSSN GFV55ESSN
CAPACITY			
Cubic feet	7.8	7.8	7.8
FEATURES			
ENERGY STAR® certified	●	●	●
UFAS/ADA*	●/●	●/●	●/●
Moisture sensor	Sensor Dry	Sensor Dry	Sensor Dry
Control type	Electronic LED	Electronic LED	Electronic LED
Vent Sensing	●	●	●
Cycle countdown	with LED indicators	with LED indicators	with LED indicators
Cycle status lights	●	●	●
Dual thermistors	●	●	●
Heat selections	5	5	5
Steam Refresh	●	●	
Steam Dewrinkle	●	●	
eDry™ option	●	●	●
Delay Dry	●	●	●
Quick Dry	●	●	●
Number of cycles	12	12	10
Bulky/Bedding	●	●	●
Cotton cycle	●	●	●
Custom cycle (My Cycle)	Using SmartHQ™ App	Using SmartHQ App	
Delicate cycle	●	●	●
Normal/mixed loads cycle	●	●	●
Optional dryness levels—Damp	●	●	●
Optional dryness levels—Dry	●	●	●
Optional dryness levels—Less dry	●	●	●
Optional dryness levels—More dry	●	●	●
Optional dryness levels—Extra dry	●	●	●
Timed dry—actual mins on timer	90	90	90
Add Time	●	●	●
Reduce Static	●	●	
WiFi Connect	●	●	●
Washer Link	●		
Damp Dry signal/Damp Alert	●	●	●
Dryer interior light	LED	LED	LED
90-ft. extended venting capability	●	●	90-ft. (GFD)/ 200-ft. (GFV)
End-of-cycle signal	Adjustable	Adjustable	Adjustable
Front serviceable	●	●	●
Door style	See-thru glass	See-thru glass	See-thru glass
Drum interior	Stainless steel	Stainless steel	Stainless steel
Leveling legs	●	●	●
Reverse-a-Door	●	●	●
Exhaust options (electric/gas)	4/4	4/4	4/4
Handle	Outside pocket	Outside pocket	Outside pocket
Dryer rack option	WE01X22274	WE01X22274	WE01X22274
Optional pedestal	GFP1528	GFP1528	GFP1528
Optional riser	GFR0728	GFR0728	GFR0728
APPEARANCE			
Colors available**	WW RS	WW SN	WW
WEIGHTS & DIMENSIONS			
Approx. shipping weight (lbs.) E/G	153/159	153/159	153/159
Flexible installation	Undercounter, stacked, side-by-side, built-in	Undercounter, stacked, side-by-side, built-in	Undercounter, stacked, side-by-side
LP conversion kit (sold separately)	WE25M87	WE25M87	WE25M87

\*ADA-qualified based on Americans with Disabilities Act. UFAS compliant with the Uniform Federal Accessibility Standards.  
\*\*WW = White, DG = Diamond Gray, RS = Sapphire Blue, SN = Satin Nickel.

DRYER DIMENSIONS (IN INCHES)  
GFD85E, GFD85G, GFD65E, GFD65G, GFD55E, GFD55G, GFV55

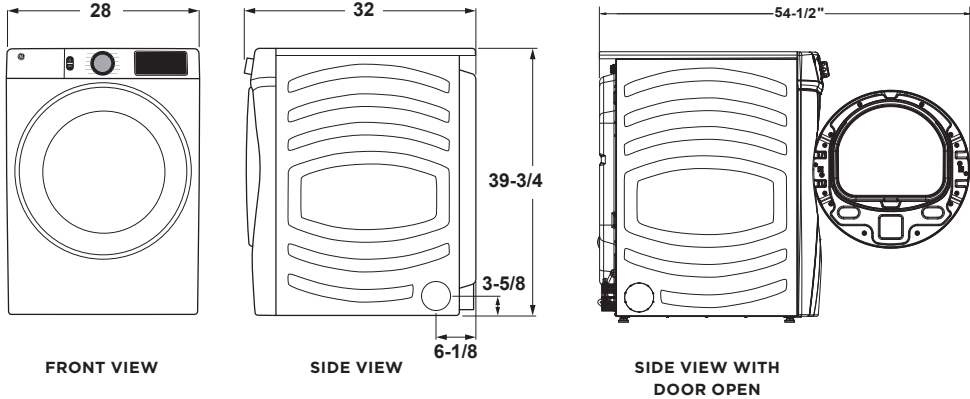

**DRYER SPECIFICATIONS**

**EXHAUST OPTIONS**

**Electric/Gas:**  
For 7.8 cu. ft. there is 4-way venting (GFD85, GFD65, GFD55 GFV55).

**CIRCUIT REQUIREMENTS**

**Electric:**  
An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse is required.

**Electric dryer rating:**  
120V/208V, 4,300W, 23A, 60Hz ~ 7.8 cu. ft. dryers; 120V/240V, 5,600W, 25A, 60Hz ~ 7.8 cu. ft. dryers

**Gas:**  
An individual, properly grounded branch circuit with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or a time-delay fuse is required.

**NEMA receptacle codes:**  
3-prong dryer cord/30A/4' long (cat #WX9X2) is for NEMA10-30R receptacle; 4-prong dryer cord/30A/4' long (cat #WX9X18) is for NEMA14-30R receptacle.

**Gas dryer electric rating:**  
120V, 60Hz, 8A

**Gas (BTU/HR):**  
20,000 for 7.8 cu. ft. dryers. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional conversion kit: 7.8 cu. ft. model kits are WE25M87. Have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

**Dryer note:**  
Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

**WASHER SPECIFICATIONS**

Circuit requirements: An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.

**Electrical requirements:** 120V, 60 Hertz, 12.0 Amps

**See pub. no. 31-2819 for installation information.**

**CONNECTIONS (IN INCHES)**  
GFD85E, GFD85G, GFD65E, GFD65G, GFD55E, GFD55G, GFV55

**REAR VIEW**


6-1/8" (top left), 1-5/8" (center), 11" (bottom center), 3-5/8" (bottom right)

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

FRONT LOAD COMBINATION WASHER/DRYER

	GE
	GFQ14ESSNWW
CAPACITY	
Cubic feet	2.4
FEATURES	
Wash/rinse temperatures	5
Water levels	Load sensing—Adaptive fill
Internal water heater	●
Number of cycles	16
Specialty cycles	4
Basket Clean	●
Detergent dispenser (liquid/powder)	●
Bleach dispenser	●
Fabric softener dispenser	●
Control type	Electronic/ Electronic touch/ LED
End-of-cycle signal	●
Wash/spin speed combinations	5
RPM spin speed	1,450
(ATC) Auto Temp Control	●
Casuals	●
Sanitize	●
Cold wash	●
Optional soil levels	5
Extra rinse	●
Adaptive capabilities	●
Cycle countdown	●
Cycle status lights	●
Delay start	●
Drain & Spin	●
Rinse & Spin	Spin-only cycle
Speed Wash	●
Door style	Round
Noise package	Deluxe Quiet
Leveling legs	●
Stainless steel wash basket	●
Inlet hoses	●
Optional stacking kit	GFA24KITL
Drive system	Direct drive
APPEARANCE	
Colors available*	WW
WEIGHTS & DIMENSIONS	
Approx. shipping weight (lbs.)	203 lb.
POWER/RATINGS	
Integrated Modified Energy Factor (IMEF)	1.84

\*WW = White

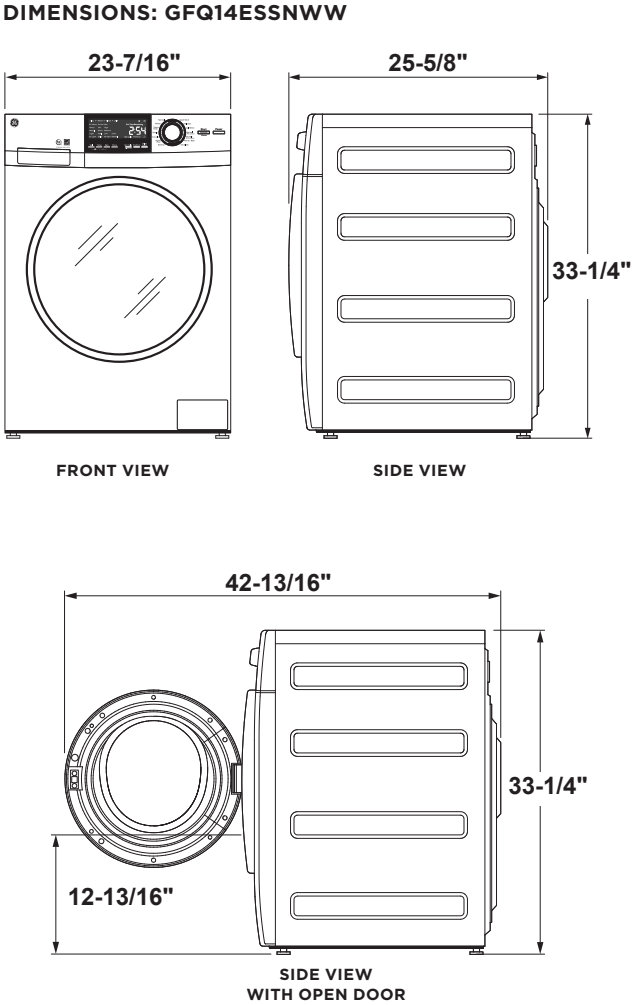

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.




FRONT LOAD WASHER

	GE
	PAIR WITH CONDENSER DRYER GFW148SSM
CAPACITY	
Cubic feet	2.4 DOE*
FEATURES	
ENERGY STAR® certified	●
WiFi Connect	Optional (Requires part no. PBX23W00Y0)
Wash/rinse temperatures	5
Water levels	Automatic
Internal water heater	●
Number of cycles	14
Specialty cycles	Active Wear
Basket Clean	●
Detergent dispenser (liquid/powder)	Flow-thru timed
Bleach dispenser	
Fabric softener dispenser	Flow-thru timed
Control type	Electronic
End-of-cycle signal	●
Wash/spin speed combinations	5
RPM spin speed	1,400
(ATC) Auto Temp Control	●
Steam	●
Prewash	●
Colors/Normal	●
Delicates	●
Whites	●
Heavy duty	●
Towels	●
Casuals	●
Sanitize	●
Cold wash	●
Optional soil levels	●
2nd rinse	●
Adaptive capabilities	Load size
Cycle countdown	with LED indicators
Cycle status lights	
Delay start	●
Drain & Spin	●
Rinse & Spin	●
Speed Wash	●
Door style	See-thru glass
Noise package	Deluxe Quiet
Leveling legs	●
Stainless steel wash basket	●
Inlet hoses	Included
Optional stacking kit	GFA24KITL
Drive system	Direct
APPEARANCE	
Colors available**	WW
WEIGHTS & DIMENSIONS	
Approx. shipping weight (lbs.)	170
Flexible installation	Undercounter, stacked, side-by-side
POWER/RATINGS	
Integrated Modified Energy Factor (IMEF)	2.2
Integrated Water Factor (IWF)	3.5

\*Department of Energy.  
\*\*WW = White.

WASHER DIMENSIONS: GFW148SSL, GFW148SSM

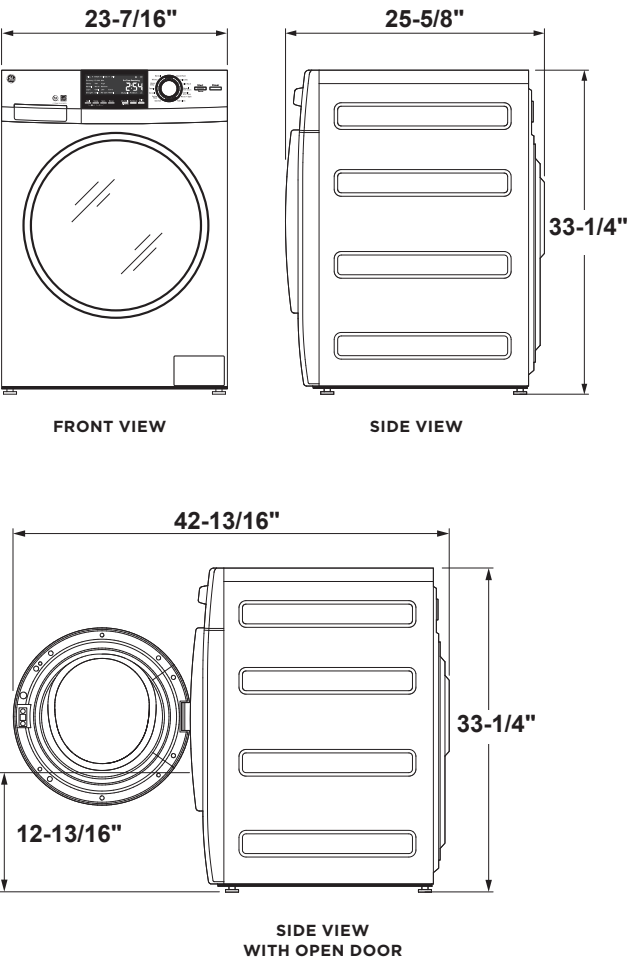


FRONT LOAD DRYER


	GE	
	CONDENSER DRYER GFT14ESSM	VENTED GFD14ESSN
CAPACITY		
Cubic feet	4.1	4.3
FEATURES		
ENERGY STAR certified	●	●
WiFi Connect	Optional (Requires part no. PBX23W00Y0)	Optional (Requires part no. PBX23W00Y0)
Moisture sensor	Sensor Dry	Sensor Dry
Control type	Electronic LED with LED indicators	Electronic LED with LED indicators
Cycle countdown	●	●
Cycle status lights	●	●
Heat selections	4	4
Number of cycles	13	13
Specialty cycles	Active Wear	Active Wear
Cotton cycle	●	●
Delicate cycle	●	●
Wrinkle Free/Casuals	●	●
Mixed loads cycle	●	●
Antibacterial cycle	●	●
Speed Dry	●	●
Timed dry	●	●
Air Fluff	●	●
Towels	●	●
Warm up	●	●
Rack Dry	●	●
Extended tumble	●	●
Dewrinkle	●	●
Damp Dry signal	●	●
Dryer interior light	LED	●
Clean lint filter reminder	●	●
Delay start	24 hours	24 hours
End-of-cycle signal	●	●
Door style	See-thru glass	See-thru glass
Noise package	Quiet-by-Design	Quiet-by-Design
Drum interior	Stainless steel	Stainless steel
Leveling legs	●	●
Reverse-a-Door	●	●
Exhaust options (electric)	Ventless tank or direct drain	Rear, left, right, bottom
Optional stacking kit	GFA24KITL	GFA24KITL
APPEARANCE		
Colors available*	WW	WW
WEIGHTS & DIMENSIONS		
Approx. shipping wt. (lbs.)	110	103
Flexible installation	Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side
POWER/RATINGS		
Volts/Hertz/Wattage	208/240V/ 60Hz/2,800W	208/240V/ 60Hz/2,800W

\*WW = White

CONDENSER DRYER DIMENSIONS: GFT14ESSM

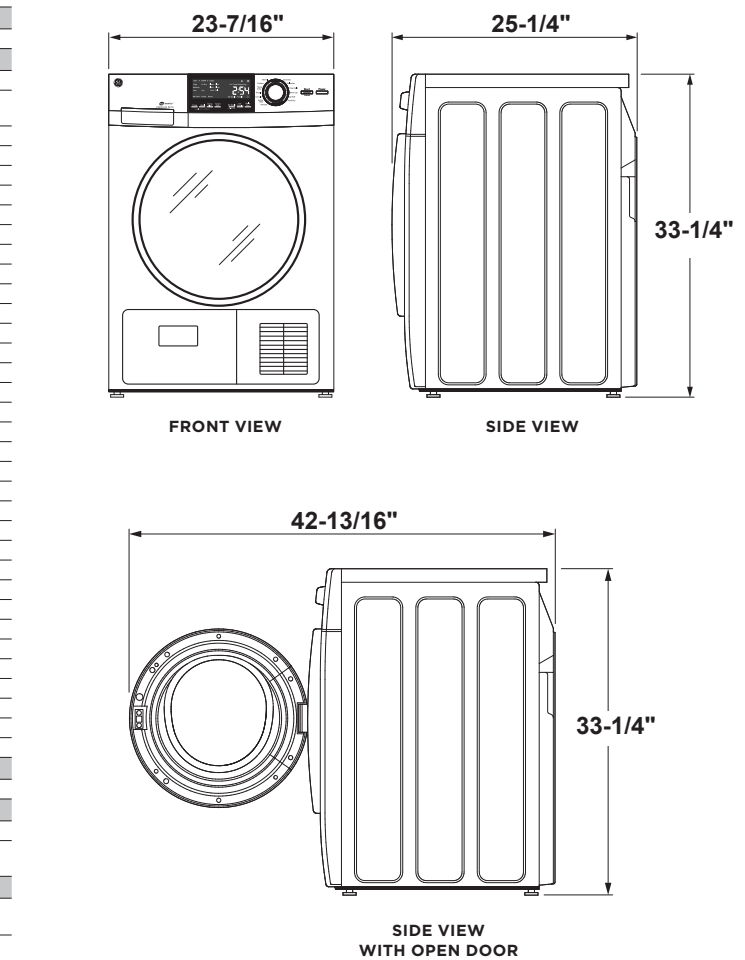

STACKED DIMENSIONS GFW148SSM, GFT14ESSM

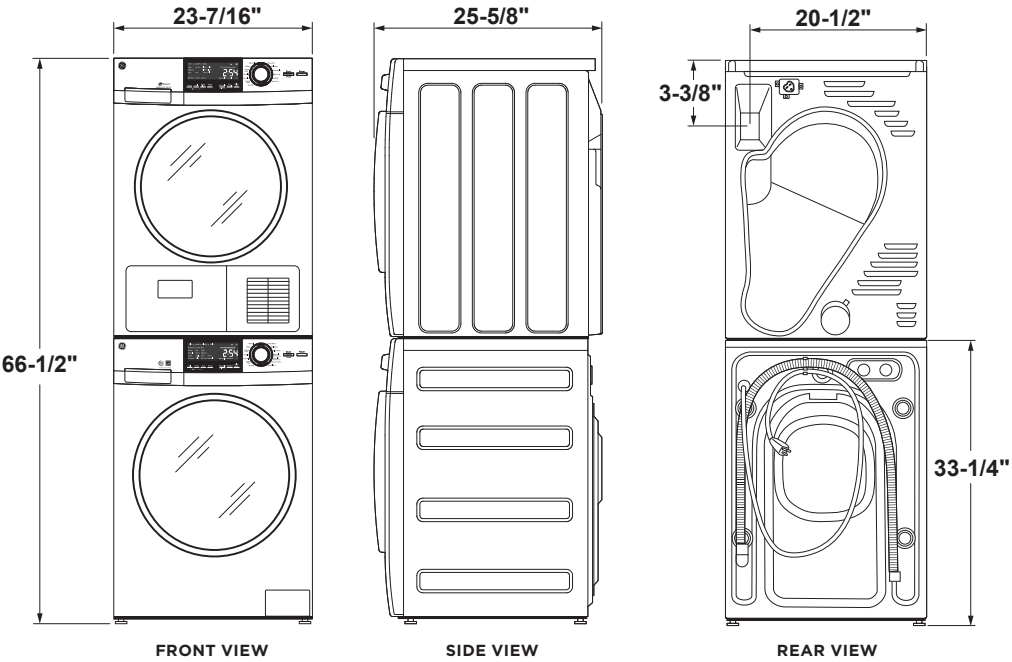


TOP LOAD WASHERS


	GE						
	GTW845CPN GTW845CSN	GTW840CPN GTW840CSN	GTW500ASN	CONTRACT EXCLUSIVE GTW490ACJ	GTW465ASN	GTW335ASN	CONTRACT EXCLUSIVE GTW220ACK
CAPACITY							
Capacity cu. ft.	5.0 DOE*	5.2 DOE*	4.6 DOE*	4.4 DOE*	4.5 DOE*	4.2 DOE*	3.8 DOE*
ENERGY							
ENERGY STAR® certified	●	●	●	●			
CONTROLS							
Electronic	●	●	●	●	●	●	●
Status indicators	LED	LED	LED	LED	LED	LED	LED
Cycle countdown	●	●					
WASH SYSTEM							
Wash/rinse temps	6	6	6	6	6	6	6
Water levels	Precise Fill	Precise Fill	Precise Fill	Precise Fill	4 + Precise Fill	4 + Precise Fill	4 + Precise Fill
Wash basket	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Infusor/Agitator	Dual-action	Infusor	Infusor	Infusor	Dual-action	Heavy-duty	Heavy-duty
Maximum spin speed	800 RPM	800 RPM	800 RPM	800 RPM	750 RPM	750 RPM	750 RPM
Deep Fill	●	●	●	●	●		
DISPENSERS							
Detergent (Liquid/Powder/PODS)	Smart Dispense (liquid detergent only)	Smart Dispense (liquid detergent only)					
Bleach	●	●	●	●	●	●	●
Fabric softener/conditioner, Deep Rinse	●	●	Deep Rinse	Deep Rinse	●	Deep Rinse	Deep Rinse
WASH CYCLES							
Number of cycles	10 + Water Station	10 + Water Station	13	13	14	11	10
Whites	●	●	●	●	●	●	●
Colors	●	●	●	●	●	●	●
Casuals/Easy Care			●	●	●	●	●
Deep Clean/Heavy Duty	w/Power Prewash	w/Power Prewash	●	●	●		
Delicates	●	●	●	●	●	●	●
Jeans	●	●	●	●	●		
Towels/Sheets	●	●	●	●	●		
Bulky Items			●	●		●	●
Quick/Speed	●	●	●	●	●		
Active Wear	●	●	●	●	●	●	●
Sanitize with Oxi	●	●					
Cold Wash			●	●			
SOILS							
Extra heavy	●	●	●	●	●		
Heavy	●	●	●	●	●	●	●
Normal	●	●	●	●	●	●	●
Light	●	●	●	●	●	●	●
Extra light			●	●	●		
TEMPERATURES							
Hot	●	●	●	●	●	●	●
Warm	●	●	●	●	●	●	●
Colors	●	●	●	●	●	●	●
Cool	●	●	●	●	●	●	●
Cold	●	●	●	●	●	●	●
Tap Cold	●	●	●	●	●	●	●
SPECIAL CYCLES							
Water Station	●	●		●			
Stain Removal Guide			●	●			
Drain & Spin	●	●	●	●	●	●	●
Basket Clean			●	●	●		
Power Prewash	●	●					
ADDITIONAL							
SmartDispense™	●	●					
WiFi Connect	●	●					
Warm Rinse	●	●					
Pre Soak/Auto Soak	●	●	●	●	●		
Stain Pretreat			●	●			
Deep Rinse	●	●	●	●	●	●	●
Extra Rinse	●	●	●	●	●		
Delay Wash	●	●					
My Cycle settings	●	●					
Inlet hoses				Included			Included
Lid	Soft-close clear glass	Soft-close clear glass	Metal	Metal	Metal	Metal	Metal
Vibration Control	Advanced	Advanced	●	●	●	●	●
Drive system	Direct	Direct	Belt	Belt	Belt	Belt	Belt
APPEARANCE							
Backsplash color***	White + Silver DG	White + Silver DG	Silver	White + Silver	White	White	White
Colors available***	WS DG	WS DG	WS	WS	WW	WW	WW
WEIGHTS & DIMEN.							
Approx. ship. weight (lbs.)	170	170	155	155	155	155	145
RATINGS							
Integrated Modified Energy Factor (IMEF)	2.06	2.06	2.06	2.07	1.35	1.30	1.30
Integrated Water Factor (IWF)	4.3	4.3	4.3	4.1	7.0	8.2	8.2

\*Department of Energy.  
\*\*In accordance with CEE High Efficiency specifications for residential clothes washers (effective 3/7/2015).  
\*\*\*WW = White, WS = White with Silver backsplash, DG = Diamond Gray.


WASHER DIMENSIONS FOR 5.2/5.0 CU. FT. CAPACITY

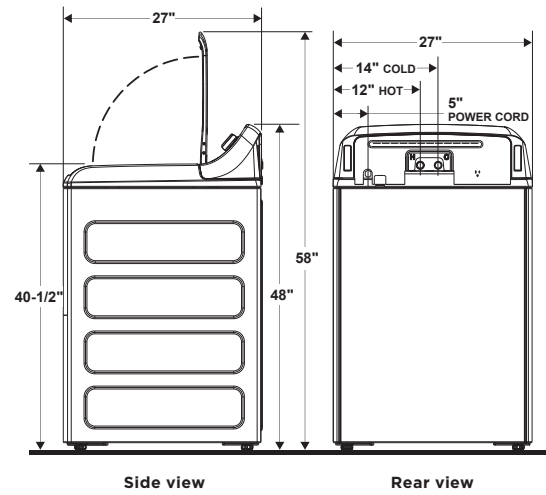

WASHER DIMENSIONS FOR 4.8/4.6 CU. FT. CAPACITY WITH GLASS LID

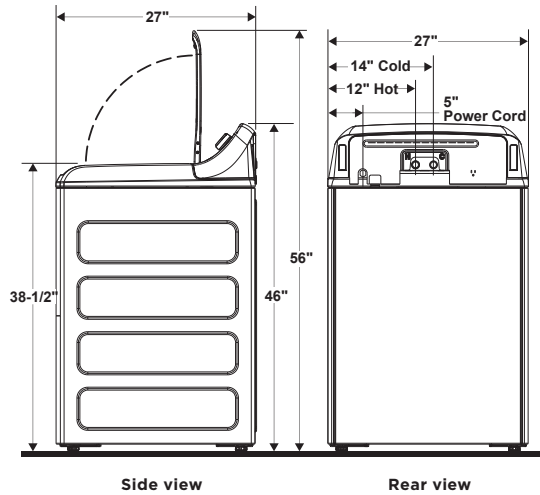

WASHER DIMENSIONS FOR 4.6, 4.5, 4.4, 4.2, 3.8 CU. FT. CAPACITY WITH METAL LID

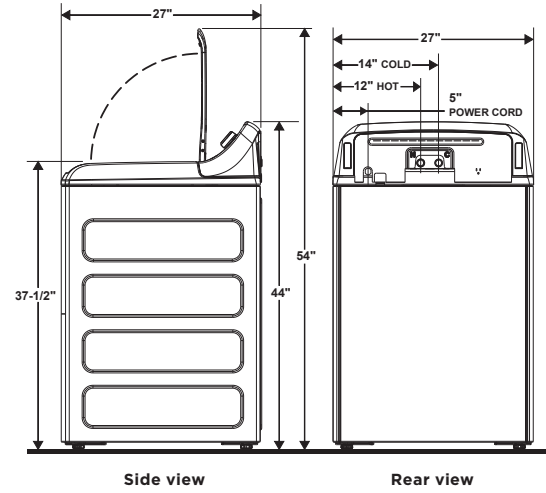

WASHER SPECIFICATIONS

**Circuit requirements:** An individual, properly grounded branch circuit with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.

**Electrical rating:** 115V, 60Hz, 10A

**Washer note:** Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.




TOP LOAD MATCHING DRYERS

	GE				
	GTD84ECSN/GCSN GTD84ECPN/GCPN	GTD45EASJ/GASJ	GTD42EASJ/GASJ	GTD33EASK/GASK GTX33EASK/GASK	CONTRACT EXCLUSIVE GTX22EASK/GASK
CAPACITY					
Capacity cu. ft.	7.4	7.2	7.2/6.2	7.2/6.2	6.2
CONTROLS					
Electronic	●				●
Electromechanical		●	●	●	●
Heat selections	4	4	4	3	3
DRY SYSTEM					
Clothing moisture sensor	Sensor Dry	Sensor Dry	Auto Dry	Auto Dry	Auto Dry
Temperature sensor	Dual thermistors	Thermostat	Thermostat	Thermostat	Thermostat
Dryer drum	Aluminized alloy	Aluminized alloy	Aluminized alloy	Aluminized alloy	Aluminized alloy
SIGNALS					
End-of-cycle	Variable	Variable	Variable	Fixed	
DRY CYCLES					
Number of cycles	11 + Steam	4	4	3	3
Mixed loads					
Cottons	●	●	●	●	●
Perm Press/Casuals	●	●	●	●	●
Quick/Speed Dry	●				
Delicates	●	●	●		
SPECIAL CYCLES					
Steam	●				
Dewrinkle/Warm up	●	●	●		
Towels/Sheets	●				
Jeans	●				
Air Fluff (no heat)		●	●	●	●
Wrinkle Care/Extended Tumble	●	●	●		
Bulky Items	●				
eDry™ modifier	●				
Sanitize	●				
ADDITIONAL FEATURES					
ENERGY STAR® certified	●				
Blocked Vent Sensor	●				
WiFi Connect	●				
Glass door	●				
Dryer interior light	LED	●	●		
Extended venting capability	120 ft.	120 ft.	120 ft.	120 ft.	120 ft.
Reverse-a-Door	●	●	●	●	●
Delay Dry	●				
Damp Alert	●				
Lint filter reminder light	●				
Dryer rack	WE1M396	WE1M396	WE1M396	WE1M396	WE1M396
My Cycle settings	●				
Time control	90 min.	80 min.	80 min.	80 min.	80 min.
APPEARANCE					
Backsplash color	White + Silver DG	Silver	White	White	White
Colors available*	WS DG	WS	WW	WW	WW
WEIGHTS & DIMENSIONS					
Approx. shipping wt.–electric (lbs.)	125	115	115 (GTD)	118 (GTD) 112 (GTX)	102
Approx. shipping wt.–gas (lbs.)	137	117	117 (GTD)	121 (GTD) 115 (GTX)	105
LP conversion kit (sold separately)	WE25X0217	WE25X0217	WE25X0217	WE25X0217	WE25X0217


\*WW = White, WS = White with silver backsplash, DG = Diamond Gray.

TOP LOAD MATCHING DRYERS


DRYER DIMENSIONS FOR 6.2 CU. FT. CAPACITY

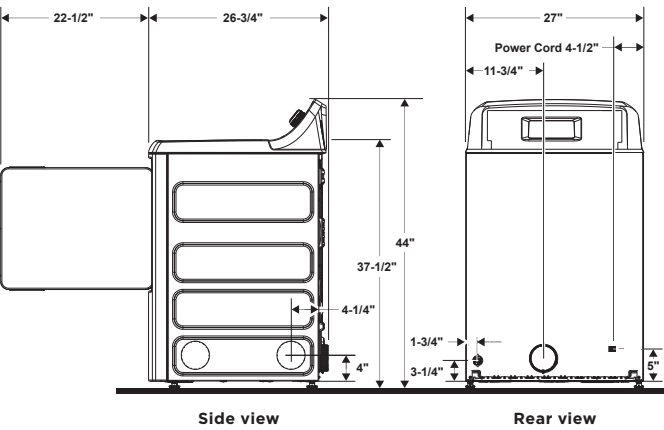

DRYER DIMENSIONS FOR GTD84

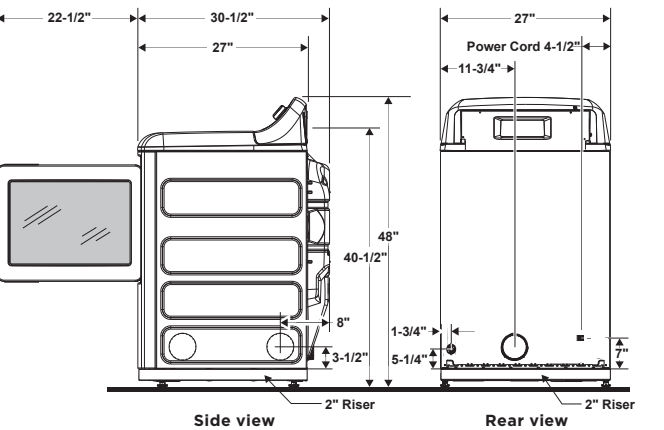

DRYER DIMENSIONS FOR 7.2 CU. FT. CAPACITY

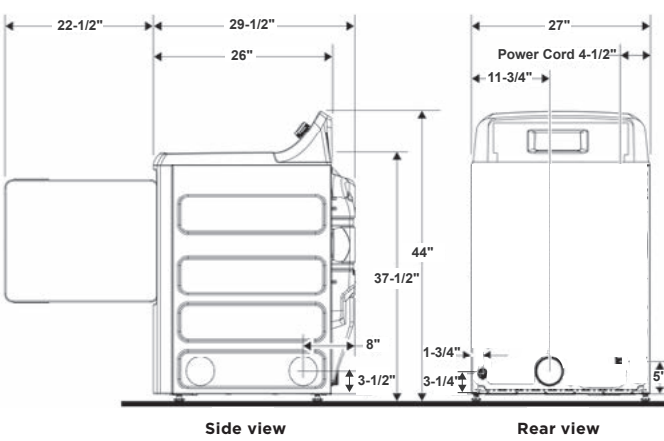

DRYER SPECIFICATIONS

EXHAUST OPTIONS:

**Electric:** 4-way via rear, right, left and bottom.

**Gas:** For 6.2, 7.2, 7.4 and 7.8 cu. ft. dryers, when viewed from the front of the unit, exhaust 3-way via rear, left and bottom. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

Circuit requirements:

Electric: An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse is required.

Electric dryer rating:

240V, 5,600W, 24A, 60Hz — 6.2, 7.2 and 7.4 cu. ft. dryers  
208V, 4,400W, 22A, 60Hz — 6.2, 7.2 and 7.4 cu. ft. dryers  
240V, 5,000W, 25A, 60 Hz — 7.8 cu. ft. dryers  
208V, 4,784W, 23A, 60 Hz — 7.8 cu. ft. dryers

**Gas:** An individual, properly grounded branch circuit with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or a time-delay fuse is required.

NEMA receptacle codes:

3-prong dryer cord/30A/4' long (cat #WX9X2) is for NEMA10-30R receptacle.

4-prong dryer cord/30A/4' long (cat #WX9X18) is for NEMA14-30R receptacle.


Gas dryer electric rating:

120V, 60Hz, 6A — 6.2, 7.2 and 7.4 cu. ft. dryers  
120V, 60Hz, 9A — 7.8 cu. ft. dryers

**Gas (BTU/HR):** 22,000 for 6.2, 7.2 and 7.4 cu. ft. dryers. 16,000 for 7.8 cu. ft. dryers. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional conversion kit: 7.0 cu. ft. model kit is WE25X0217. 7.8 cu. ft. model kit is WE25M87. Have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

**Dryer note:** Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

POWER CORD LOCATIONS  
6.2, 7.2 & 7.4 CU. FT. DRYERS




PORTABLE/STATIONARY WASHERS & DRYERS

	GE
INDIVIDUAL WASHERS	GNW128PS GNW128SS
CAPACITY	
Capacity (cu. ft.)	2.8 DOE*
FEATURES	
Wash/spin speed combinations	1
Wash/rinse temperatures	4
Number of cycles	8
Regular	
Normal	●
Soak	●
Delicates	●
Speed Wash	●
Heavy Duty cycle	●
Deep Fill	●
Wash Rinse and/or Spin	
Wash mechanism	Infusor
Bleach dispenser	●
Fabric softener dispenser	●
Automatic detergent dispenser	●
Tub lint filter	●
Washer lid type	Black
Spin speed	750 RPM
Easy-roll rollers	●
Basket material	Stainless steel
Fill & drain hoses included	●
APPEARANCE	
Colors available	White
WEIGHTS & DIMENSIONS	
Circuit requirements	120V, 60Hz, 15 or 20 Amps
Dimensions (HxWxD in inches)	37-2/5 x 24 x 24-1/2
Approx. shipping wt. (lbs.)	116
*Department of Energy.	


	GE	
INDIVIDUAL DRYERS	DSKS433EB	DSKP333EC* DSKS333EC
CAPACITY		
Capacity (cu. ft.)	3.6	3.6
FEATURES		
ADA compliant***		● / —
Dry control	Automatic	Automatic
Heat selections	4	3 (timer)
Number of dry cycles	3	3
Auto Perm. Press & Delicate	●	
Auto regular	●	●
Timed regular (min.)	140	150
Air Fluff (min.)	(Heat selection)	30
Separate start switch	●	●
Control location	Mid-band	Top
Lint filter	Upfront	Upfront
APPEARANCE		
Colors available**	WW	WW
WEIGHTS & DIMENSIONS		
Exhaust options†	4-way	4-way—rear, bottom, left, right
Circuit requirements	240/208V††, 60 Hertz, 30 Amps	120V, 60 Hertz, 15 Amps
Power cord	No cord	6 feet
Dimensions (HxWxD in inches)	33-1/4 x 23-7/8 x 24-1/2	33-1/4 x 23-7/8 x 24-1/2
Wall-mount kit (available at additional cost)	WMK-35	WMK-35
Approx. shipping wt. (lbs.)	108	108

\*DSKP333EC dryer comes equipped with casters.  
\*\*Colors available: WW = White.  
\*\*\*ADA-qualified based on Americans with Disabilities Act. UFAS compliant with the Uniform Federal Accessibility Standards.  
†DSKS433EB and DSKS333EC are shipped exhausted through the top.  
††Rear-mounted outlet on DSKS433EB (120V, 60 Hertz, 10 Amp, DSKS433EB and DSKS333EC approved for use with washer/dryer stack rack DSDR24F.)  
**Circuit requirements:** An individual, properly grounded branch circuit of the proper voltage and frequency as specified on the rating plate, with no other appliances or fixtures in circuit, is required.

TOP VENT INSTALLATION DIMENSIONS (IN INCHES)

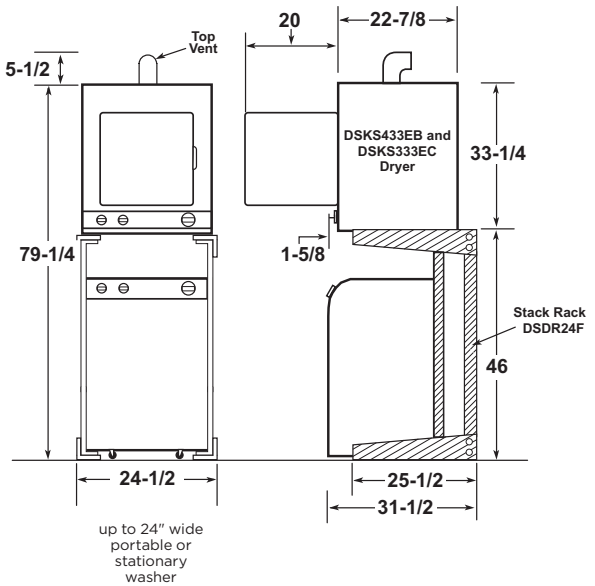

WALL-MOUNT INSTALLATION DIMENSIONS (IN INCHES)

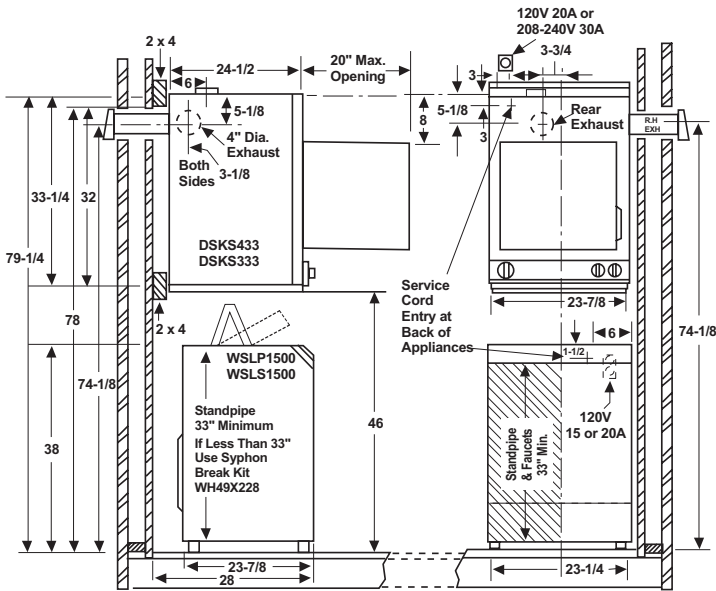

Listed by  
Underwriters  
Laboratories

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.

UNITIZED WASHERS & DRYERS


	GE		
WASHERS	GUD27ESSM/GSSM GUD27ESPM/GSPM GUV27ESSM	GUD27EESN GUD27GESN	GUD24ESSM GUD24GSSM
CAPACITY			
Capacity (cu. ft.)	3.8 DOE*	3.9 DOE*	2.3 DOE*
CONTROLS			
Electronic	●	●	●
FEATURES			
Wash/spin speed combinations	1	1	1
Wash temperatures	6	6	6
Auto load sensing	4	●	●
Number of wash cycles	11	12	11
Deep rinse	●	●	●
Deep rinse & spin	●	●	●
Bleach/fabric softener dispensers	●	Bleach	●
Fill & drain hoses (included)	●	●	●
Drive system	Belt	Belt	Belt
Drive system WiFi Connect	Optional (Requires part no. PBX23W00Y0)		
Wash Mechanism	Agitator	Infusor	Agitator

DRYERS			
CAPACITY			
Capacity (cu. ft.)	5.9	5.9	4.4
CONTROLS			
Electromechanical	●	●	●
FEATURES			
Automatic dry control	●	●	●
Number of dry cycles	4	4	4
Cottons	●	●	●
Easy Care	●	●	●
Delicates	●	●	●
Timed dry	●	●	●
Quick Fluff	●	●	●
Dewrinkle	●	●	●
Control location	Mid-band	Mid-band	Mid-band
Exhaust options	3 way—rear, left, right	3 way—rear, left, right	3 way—rear, left, right
Lint filter	●	●	●
APPEARANCE			
Colors available**	WW DG WW	WW	WW
WEIGHTS & DIMENSIONS			
Dimensions (HxWxD in inches)	75-1/2 x 26-4/5 x 30-17/20***	75-7/8 x 26-3/4 x 30-7/8	74-1/2 x 23-3/4 x 27-1/4***
Approx. shipping wt. (lbs.)	271	279	241
LP conversion kit (sold separately)	WE25M74	WE25M74	WE25M73
RATINGS			
Integrated Modified Energy Factor (IMEF)	1.57	1.57	1.57
Integrated Water Factor (IWF)	6.5	6.5	6.5


\*Department of Energy.  
\*\*WW = White, DG = Diamond Gray.  
\*\*\*Depth dimension assumes water hook-up is recessed in the wall.  
**Note:** The third prong on GUD27ESSJ/GSSJ plug configuration is a flat spade type rather than a typical round probe. It requires a matching wall outlet.  
**Electrical requirements for unitized dryers**  
**GUD27ESSJ: Electric dryer**—This appliance should be connected to an individual, properly grounded branch circuit with 120/240V or 120/208V single-phase 60Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with the neutral connected to the frame. Power cord should be purchased separately.  
**GUD24ESSJ: Electric dryer**—This appliance should be connected to an individual, properly grounded branch circuit with 120/240V single-phase 60Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with the neutral connected to the frame. Power cord should be purchased separately.  
**NOTE:** THESE APPLIANCES ARE NOT APPROVED FOR 120-VOLT OPERATION.  
**GUD24GSSJ: Gas dryer**—This appliance should be connected to an individual, properly grounded branch circuit with a three-prong grounding-type receptacle and 120-volt single-phase 60Hz electrical service and should be protected by 15- or 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 6-foot-long flexible UL® listed 15-amp power cord to match a 15-amp receptacle.  
**Gas rated** input 10,500 BTU/HR. Factory equipped for natural gas. Tested for LP gas.  
**GUD27GSSJ: Gas dryer**—This appliance should be connected to an individual branch circuit with 120-volt single-phase 60Hz electrical service and should be protected by 15-amp time-delay fuses or circuit breakers. This appliance is equipped with a 4-foot-long flexible UL listed 15-amp power cord to match a 15-amp receptacle.  
**Gas rated** input 20,000 BTU/HR. Factory equipped for natural gas.  
**LP gas supply requires a conversion kit.**  
Kits: GUD27GSSJ—WE25M74; GUD24GSSJ—WE25M73  
Have a qualified gas technician install a conversion kit before use.  
**Exhaust information**  
See “Dryer Exhausting Information” on the next page.  
For complete information see installation instructions packed with the product.

Above illustrations intended for dimensional reference only.  
Refer to photography for actual product appearance.


DIMENSIONS (IN INCHES)  
GUD27ESSM/GSSM

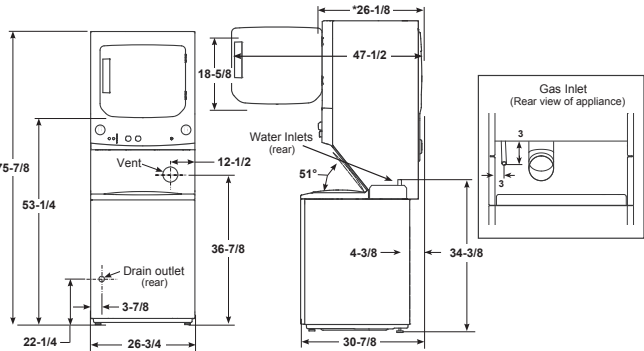

POWER CORD LOCATION  
GUD27ESSM/GSSM



DIMENSIONS (IN INCHES)  
GUD24ESSM/GSSM

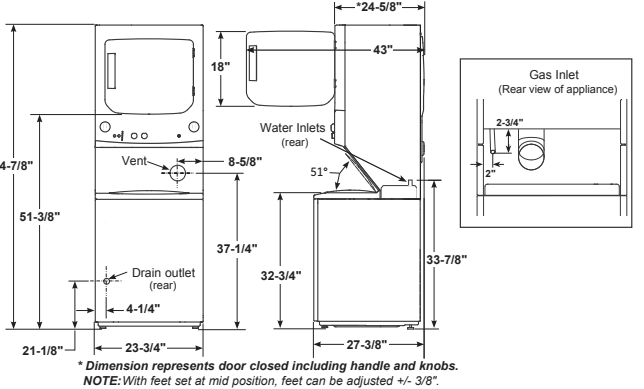




GENERAL INFORMATION FOR DRYER EXHAUSTING


Minimizing the length of ductwork and the number of turns in an exhaust system minimizes the potential for lint to settle and accumulate in the exhaust duct and in the interior cabinet of the dryer. Refer to your specific dryer installation instructions for recommended duct length.

**1. Exhaust duct terminations**  
All exhaust systems must be terminated in a manner that will prevent backdrafts from outside as well as prevent birds or other wildlife from building nests or taking refuge in the ductwork. The termination should present minimal resistance to the flow of exhaust air and should require little maintenance to prevent clogging. **The preferred termination is either a dampered wall cap with a 4"-wide opening or a movable louvered wall cap.** A 2-1/2" wall cap restricts airflow and increases drying time. Wall caps must be installed with the opening down, and installed at a minimum of 12" above ground level or any other obstruction. Special consideration should be given in areas where heavy snow drifts are likely to occur to ensure the wall cap does not become obstructed. Other types of terminations are acceptable providing **they are equivalent to the 4" dampered wall cap.** They must contain at least 14 square inches of ventilation area, afford adequate protection against backdrafts, and meet all other requirements listed here.



**Exhaust ducts must not contain screens or other filtering devices which may become clogged with lint.** The dryer exhaust must not terminate in an ordinary chimney, under an enclosed house floor or crawl space, or into an attic, since any accumulated lint could create a fire hazard and the moisture could cause damage. **Never terminate the exhaust into a common duct or plenum with a kitchen hood exhaust since the combination of grease and lint could create a fire hazard.**

**2. Separation of turns in the ductwork**  
All turns in the exhaust system, external to the dryer itself, including the distance from the last turn to the dampered wall cap, should be separated by at least 4' of straight metal duct. This will reduce the added resistance which results from rapid changes in airflow direction inside the ducting. If two turns must be closer than 4', deduct 10' from the maximum lengths shown in the chart on the next page.



**3. Treatment of turns other than 90°**  
One turn of 45° or less may be ignored. Two such turns should be treated as one 90°. Each turn over 45° should be treated as one 90°. Refer to specific dryer installation for maximum duct lengths and for allowable number of 90° bends. In determining the number of turns for an exhaust system, one 90° turn must be added for the bend made inside the cabinet whenever the dryer is exhausted through the right, left or bottom. NOTE: Some dryers are limited to only rear exhausting. Consult the installation instructions for the type of dryer being used.

**4. Connecting the dryer to house vent**  
**To reduce the risk of fire, never use plastic or other combustible ductwork.**

Rigid Metal Transition Duct

- For best drying performance, a rigid metal transition duct is recommended.
- Rigid metal transition ducts reduce the risk of crushing and kinking.

UL listed Flexible Metal (Semi-Rigid) Transition Duct

- If rigid metal duct cannot be used, then UL listed flexible metal (semi-rigid) ducting can be used (Kit WX08X10077).
- Never install flexible metal duct in walls, ceilings, floors or other enclosed spaces.
- Total length of flexible metal duct should not exceed 8 feet (2.4m).
- For many applications, installing elbows at both the dryer and the wall is highly recommended (see illustrations). Elbows allow the dryer to sit close to the wall without kinking and/or crushing the transition duct, maximizing drying performance.
- Avoid resting the duct on sharp objects.

UL listed Flexible Metal (Foil-Type) Transition Duct

- In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL listed flexible metal (foil-type) duct may be used ONLY in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used AND where a 4" diameter can be maintained throughout the entire length of the transition duct.
- In Canada and the United States, only the flexible metal (foil-type) ducts that comply with the "Outline for Clothes Dryer Transition Duct Subject 2158A" shall be used.
- Never install flexible metal duct in walls, ceilings, floors or other enclosed spaces.
- Total length of flexible metal duct should not exceed 8 feet (2.4m).
- Avoid resting the duct on sharp objects.

See Installation instructions for complete details.


**5. Sealing of joints**  
The chimney must be fire-resistant and large enough to accommodate the volume of air exhausting from the dryers. Consideration must be made for lint buildup, excessive chimney pressures, backdrafts and other technical factors which will influence the performance and the safety of the system. A lint clean-out access door should be included at the bottom of the chimney. Each dryer duct must have a 4"-diameter backdraft damper, adjusted so that it will just close with the dryer inoperative. This will prevent the exhaust and lint of one dryer from going into another dryer and its room. The duct system for each individual dryer must meet the turn and length requirements as noted on this page.

**6. Water condensation**  
Condensation in a dryer exhaust system is caused by the moisture in the exhausted air contacting the cold inner surfaces of the ductwork. Condensation, which forms at the beginning of the drying cycle, will dissipate quickly after the ductwork becomes heated. If the ductwork passes through an area which keeps it cool throughout the drying cycle, considerable condensation within the duct can be expected. This can result in rapid accumulation of lint in the ductwork. Ductwork which runs through an unheated area or is situated adjacent to an air conditioning duct should be insulated to avoid such condensation problems. Joints should be tight to avoid leaks and, where feasible, the duct should be dropped 1/16" per foot toward the termination.

**7. Accessibility for cleaning**  
Since it may be necessary from time to time to remove lint from the inside of the ductwork, it is important that the exhaust system be installed with a provision for periodic inspection and cleaning. Some provision should be made for access to turns and straight runs of duct installed in an enclosed area, such as above plastered ceilings. Special consideration should be given to the amount of maintenance required for roof caps on vertical installations, since the user cannot be expected to make frequent inspections or cleanings.

**Single family-type dwellings**  
For more detailed information, refer to the installation instructions for the specific dryer model selected.

**Mobile or manufactured home installation**  
Gas dryer installation must conform with local Gas Codes and with CGA B149.1 or B149.2 (Installation code for Gas Burning Appliances and Equipment). All dryer Installations must conform to Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 32-80. The dryer must be exhausted to the outdoors with the termination securely fastened to the mobile home structure. The exhaust MUST NOT be directed underneath the mobile home.




MULTI-UNIT DRYER INSTALLATION

(CONTINUED)

Chimney exhaust system

The chimney must be fire-resistant and large enough to accommodate the volume of air exhausting from the dryers. Consideration must be made for lint buildup, excessive chimney pressures, backdrafts and other technical factors which will influence the performance and the safety of the system. A lint clean-out access door should be included at the bottom of the chimney. Each dryer duct must have a 4"-diameter backdraft damper, adjusted so that it will just close with the dryer inoperative. This will prevent the exhaust and lint of one dryer from going into another dryer and its room. The duct system for each individual dryer must meet the turn and length requirements as noted on this page.

**Use the specs for a 2-1/2" exhaust hood for proper dryer performance.** Include the 90° elbow and all ducting in the chimney in your calculations. The 22" (minimum) of vertical ducting in the chimney reduces back pressure and is required for proper dryer performance. **See Illustration No. 3.**

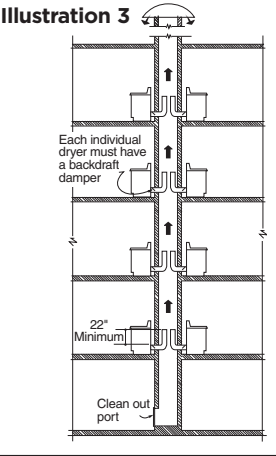

SPECIAL INSTALLATION REQUIREMENTS

Alcove or closet installation

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer MUST be exhausted to the outdoors. See exhaust information on this page and installation instructions.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are:
  - 1" front and rear
  - 1" top
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area.
- No other fuel-burning appliance shall be installed in the same closet with a gas dryer.
- The closet should be vented to the outdoors to prevent gas pocketing in case of a gas leak in the supply line.

Bathroom or bedroom installation

- The dryer MUST be exhausted to the outdoors. See installation instructions.
- The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code, NFPA70, and National Fuel Gas Code, NFPA54, for gas dryers.

Minimum clearances other than alcove or closet installations

- Minimum clearances to combustible surfaces:
  - 0" both sides
  - 1" rear

Side or bottom exhaust

- For 7.0 or 6.0 cu. ft. models, see installation instructions – WE25X10015.
- Unitized models do not require a kit for side venting.

For more information on venting kits and accessories, please call 1-800-GE-CARES.

DRYER EXHAUSTING INFORMATION

For complete information see installation instructions packed with dryer.

Important note:

- 6.0 and 7.0 cu. ft. dryers require additional parts to convert to side venting.
- GUD does not require a kit for side venting as rear elbow pivots 360°.

Ducting materials

For best performance, the dryer should be vented with 4" diameter all-rigid metal exhaust duct. If rigid metal duct cannot be used, then UL listed flexible metal (semi-rigid) ducting can be used (PM08X10085 or WX08X10085). In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL listed flexible metal (foil-type) duct may be used ONLY in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used AND where a 4" diameter can be maintained throughout the entire length of the transition duct. Please see installation instructions packed with your dryer for complete instructions when using flexible metal (foil type) ducting. See installation instructions for complete information.

EXHAUST LENGTH CALCULATION:

- Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
- The maximum length of 4" diameter rigid (aluminum or galvanized) duct which can be tolerated is shown in the table.  
See table in installation instructions. A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow.

Dryers **must** be exhausted to the outside.

**Caution:** For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent backdrafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.

DRYER EXHAUSTING INFORMATION—  
USE METAL DUCT ONLY VERTICAL AND  
HORIZONTAL DUCTING

	Number of 90° turns	BEST PERFORMANCE	
		Maximum length of 4" diam. rigid metal duct	
		Exhaust hood type	
		A 4" opening	B 2-1/2" opening
GE Domestic dryer models	0	200 ft.	175 ft.
	1	185 ft.	165 ft.
	2	175 ft.	155 ft.
	3	165 ft.	145 ft.
	4	155 ft.	135 ft.
Front Load Long Vent 7.0 cu. ft. capacity electric dryer (GFDL and GUV27E)	5	145 ft.	125 ft.
	0	120 ft.	90 ft.
	1	100 ft.	75 ft.
	2	85 ft.	65 ft.
	3	70 ft.	55 ft.
Long Vent 6.2, 7.2 and 7.4 cu. ft. capacity electric & gas dryers (GTD33, GTD42, GTD45, GTD65, GTD84, GTX22, GTX33)	4	60 ft.	45 ft.
	5	55 ft.	35 ft.
All 6.0 - 8.3 cu. ft. capacity models electric and gas dryers (GFDN, GFD, GTD)	0	90 ft.	60 ft.
	1	60 ft.	45 ft.
	2	45 ft.	35 ft.
	3	35 ft.	25 ft.
	4	25 ft.	15 ft.
DCVH480	0	46 ft.	37 ft.
	1	37 ft.	30 ft.
	2	30 ft.	22 ft.
	3	23 ft.	15 ft.
All 3.6 cu. ft. (DSKS, DSKP) electric dryers	0	56 ft.	42 ft.
	1	48 ft.	34 ft.
	2	40 ft.	26 ft.
	3	32 ft.	18 ft.
Laundry Center GUD27	0	43 ft.	36 ft.
	1	33 ft.	26 ft.
	2	24 ft.	16 ft.
Laundry Center GUD24	0	43 ft.	36 ft.
	1	33 ft.	26 ft.
	2	24 ft.	16 ft.

For every extra 90° elbow, reduce the allowable vent system length by 10 ft. Two 45° elbows will be treated like one 90° elbow.  
For the side exhaust installations, add one 90° elbow to the chart.  
When calculating the total vent system length, you must add all the straight portions and elbows of the system (including the transition duct).  
Laundry Center length includes factory-installed elbow that does not impact vent length.

DRYER EXHAUST LENGTH\*  
GUD27ESSM/GSSM

NUMBER OF 90° ELBOWS	RECOMMENDED MAXIMUM LENGTH	
	EXHAUST HOOD TYPES	
	Recommended	Use only for short run installations
	RIGID METAL	RIGID METAL
0	56 FT.	42 FT.
1	48 FT.	34 FT.
2	40 FT.	26 FT.
3	32 FT.	18 FT.

GUD24ESSJ/GSSJ

0	43 FT.	36 FT.
1	33 FT.	26 FT.
2	24 FT.	16 FT.

DRYER EXHAUST LENGTH\*  
GUV27ESSM

NUMBER OF 90° ELBOWS	BEST PERFORMANCE	
	MAXIMUM LENGTH OF 4" DIAMETER RIGID METAL DUCT	
	EXHAUST HOOD TYPES	
	A 4" OPENING	B 2-1/2" OPENING
0	200 FT.	175 FT.
1	185 FT.	165 FT.
2	175 FT.	155 FT.
3	165 FT.	145 FT.
4	155 FT.	135 FT.
5	145 FT.	125 FT.

For every extra 90° elbow, reduce the allowable vent system length by 10 ft. Two 45° elbows will be treated like one 90° elbow. For the side exhaust installations, add one 90° elbow to the chart.

\*When calculating the total vent system length, you must add all the straight portions and elbows of the system (including the transition duct).

Laundry Center length includes factory-installed elbow that does not impact vent length.

ELECTRIC WATER HEATERS

	GE							
	GE50T10BAM GE50T08BAM	GE50S10BAM GE50S08BAM	GE40T10BAM GE40T08BAM	GE40S10BAM GE40S08BAM	GE40L08BSM GE40L08BAM	GE30T10BAM GE30T08BAM	GE30S10BAM GE30S08BAM	GE30L08BSM GE30L08BAM
Rated capacity (gallons)	50	50	40	40	36	30	30	26
Nominal capacity (gallons)	50	50	40	40	36	30	30	26
FEATURES								
Family size*	3-5	3-5	2-4	2-4	2-4	1-3	1-3	1-3
Control type	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Temperature setting	90-150°F	90-150°F	90-150°F	90-150°F	90-150°F	90-150°F	90-150°F	90-150°F
Temperature setting factory default	120°F	120°F	120°F	120°F	120°F	120°F	120°F	120°F
Drain valve type	Brass Plastic	Brass Plastic	Brass Plastic	Brass Plastic	Plastic Plastic	Brass Plastic	Brass Plastic	Plastic Plastic
WEIGHT & DIMENSIONS								
Approx. shipping weight (lbs.)	154	161	139	133	145	113	111	114
Height to water connection (in.)	63-7/8	53	65-1/2	52-7/8	33-5/8	51-3/8	42	32-7/8
Tank dimensions (diameter x height in in.)	22 X 62-3/8	24 x 51-1/2	20 x 64	22 x 51-3/8	27 x 32-3/4	20 x 49-7/8	22 x 40-3/8	24 x 31-1/4
Connection sizes—hot water outlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Connection sizes—water inlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
POWER/RATINGS								
Electrical circuit direct wired	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated
Heating elements	Stainless steel Copper	Stainless steel Copper	Stainless steel Copper	Stainless steel Copper	Copper Copper	Stainless steel Copper	Stainless steel Copper	Copper Copper
Element density	Low High	Low High	Low High	Low High	High High	Low High	Low High	High High
Lower element (watts)	5,500	5,500	5,500	5,500	5,500	5,500	5,500	5,500
Upper element (watts)	5,500	5,500	5,500	5,500	5,500	5,500	5,500	5,500
Uniform energy factor (UEF)	0.93	0.93	0.92	0.92	0.92	0.92	0.92	0.92
First hour rate (FHR) (gallons)	76	76	65	66	63/61	54	53	58/53
Operating water pressure	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi
WARRANTY								
Parts warranty	10/8 years	10/8 years	10/8 years	10/8 years	8/8 years	10/8 years	10/8 years	8/8 years

\*Household sizing based on back-to-back showers, 8 minutes long.

ELECTRIC WATER HEATERS WITH ELECTRONIC CONTROL

	GE					
	GE50T12BLM GE50T10BLM	GE50S12BLM GE50S10BLM	GE40T12BLM GE40T10BLM	GE40S12BLM GE40S10BLM	GE30T12BLM GE30T10BLM	GE30S12BLM GE30S10BLM
Rated capacity (gallons)	50	50	40	40	30	30
Nominal capacity (gallons)	50	50	40	40	30	30
Product application	Residential	Residential	Residential	Residential	Residential	Residential
Warranty	12 years tank and parts and 1 year labor 10 years tank and parts and 1 year labor	12 years tank and parts and 1 year labor 10 years tank and parts and 1 year labor	12 years tank and parts and 1 year labor 10 years tank and parts and 1 year labor	12 years tank and parts and 1 year labor 10 years tank and parts and 1 year labor	12 years tank and parts and 1 year labor 10 years tank and parts and 1 year labor	12 years tank and parts and 1 year labor 10 years tank and parts and 1 year labor
FEATURES						
Family size*	3-5	3-5	2-4	2-4	1-3	1-3
Control type	Electronic with digital display and app	Electronic with digital display and app	Electronic with digital display and app	Electronic with digital display and app	Electronic with digital display and app	Electronic with digital display and app
Operating modes	Normal/Vacation	Normal/Vacation	Normal/Vacation	Normal/Vacation	Normal/Vacation	Normal/Vacation
Temperature setting	100-140°F	100-140°F	100-140°F	100-140°F	100-140°F	100-140°F
Temperature setting factory default	120°F	120°F	120°F	120°F	120°F	120°F
Drain valve type	Brass Plastic	Brass Plastic	Brass Plastic	Brass Plastic	Brass Plastic	Brass Plastic
Built-in WiFi with app	●	●	●	●	●	●
Sensing anode	● / —	● / —	● / —	● / —	● / —	● / —
Diagnostic feedback	●	●	●	●	●	●
WEIGHT & DIMENSIONS						
Approx. shipping weight (lbs.)	154	161	139	133	113	111
Height to water connection (in.)	63-7/8	53	65-1/2	52-7/8	51-3/8	42
Tank dimensions (diameter x height in in.)	22 x 62-3/8	24 x 51-1/2	20 x 64	22 x 51-3/8	20 x 49-7/8	22 x 40-3/8
Connection sizes—hot water outlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Connection sizes—water inlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
POWER/RATINGS						
Electrical circuit direct wired	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated	240V/60Hz/30A min. dedicated
Heating elements	Stainless steel Copper	Stainless steel Copper	Stainless steel Copper	Stainless steel Copper	Stainless steel Copper	Stainless steel Copper
Element density	Low High	Low High	Low High	Low High	Low High	Low High
Lower element (watts)	5,500	5,500	5,500	5,500	5,500	5,500
Upper element (watts)	5,500	5,500	5,500	5,500	5,500	5,500
Uniform energy factor (UEF)	0.93	0.93	0.92	0.92	0.92	0.92
First hour rate (FHR) (gallons)	78	75	66	65	59	60
Operating water pressure	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi
WARRANTY						
Parts warranty	12/10 years	12/10 years	12/10 years	12/10 years	12/10 years	12/10 years

\*Household sizing based on back-to-back showers, 8 minutes long.

FLEXIBLE-CAPACITY ELECTRONIC WATER HEATERS

	GE		
	GE50S10BMM	GE40S10BMM	GE30S10BMM
Rated capacity at normal setting (gallons)	50	40	30
Capacity at X-High setting* (gallons)	80	64	48
FEATURES			
Family size on X-High setting**	3-6	2-5	1-4
Control type	Electronic with digital display	Electronic with digital display	Electronic with digital display
Operating modes	Normal/Vacation	Normal/Vacation	Normal/Vacation
Integrated, electronic mixing valve	●	●	●
Capacity settings	Normal/High/X-High	Normal/High/X-High	Normal/High/X-High
Temperature setting	100-140°F	100-140°F	100-140°F
Temperature setting factory default	120°F	120°F	120°F
Drain valve type	Brass	Brass	Brass
Built-in WiFi with app	●	●	●
Diagnostic feedback	●	●	●
Sensing anode rod	●	●	●
WEIGHT & DIMENSIONS			
Approx. shipping weight (lbs.)	171	143	121
Height to water connection (in.)	61	60-7/8	49-7/8
Tank dimensions (diameter x height in in.)	24 x 59-1/2	22 x 59-3/8	22 x 48-3/8
Connection sizes—hot water outlet (mnpt)	3/4"	3/4"	3/4"
Connection sizes—water inlet (mnpt)	3/4"	3/4"	3/4"
POWER/RATINGS			
Electrical circuit direct wired	240V/60Hz/30A min.	240V/60Hz/30A min.	240V/60Hz/30A min.
Heating elements	Stainless steel	Stainless steel	Stainless steel
Element density	Low	Low	Low
Lower element (watts)	5,500	5,500	5,500
Upper element (watts)	5,500	5,500	5,500
Energy factor	0.93	0.92	0.92
First hour rating (FHR) (gallons)	75 (normal setting)	65 (normal setting)	59 (normal setting)
Operating water pressure	20-125 psi	20-125 psi	20-125 psi
WARRANTY			
Parts warranty	10 years	10 years	10 years

\*Versus comparable water heater without mixing valve at 120° F setting and 58° F inlet water temperature.

\*\*Household sizing based on back-to-back showers, 8 minutes long.

ELECTRIC POINT-OF-USE TANK STYLE WATER HEATERS

	GE			
	GE20P08BAR	GE10P08BAR	GE06P08BAR	GE02P08BAR
Rated capacity (gallons)	18	10	6	2.5
Nominal capacity (gallons)	18	10	6	2.5
FEATURES				
Family size*	1-3	1-3	1-2	1-2
Control type	Mechanical temperature control	Mechanical temperature control	Mechanical temperature control	Mechanical temperature control
Operating modes	Normal/Vacation	Normal/Vacation	Normal/Vacation	Normal/Vacation
Integrated, electronic mixing valve	●	●		●
Capacity settings	Normal/High/X-High	Normal/High/X-High		Normal/High/X-High
Temperature setting	70-140°F range	70-140°F range	70-140°F range	70-140°F range
Temperature setting factory default	120°F	120°F	120°F	120°F
Drain valve type	Plastic	Plastic	Plastic	Plastic
Built-in WiFi with app	●	●	●	●
Diagnostic feedback	●	●	●	●
Sensing anode rod	● / —	● / —	● / —	● / —
WEIGHT & DIMENSIONS				
Approx. shipping weight (lbs.)	62	46	20	29
Height to water connection (in.)	25-5/8	24-1/2	17-13/20	13
Tank dimensions (diameter x height in in.)	19-1/4 x 25-5/8	14-3/4 x 24-1/2	7-13/20 x 7-13/20	13 x 13
Connection sizes—hot water outlet (mnpt)	1/2"	1/2"	1/2"	1/2"
Connection sizes—water inlet (mnpt)	1/2"	1/2"	1/2"	1/2"
POWER/RATINGS				
Amps	12	12	12	12
Power Rating—kW	1440	1440	1440	1440
Element density	Low / High	Low / High	Low / High	Low / High
Voltage (MAX)	120V	120V	120V	120V
Uniform energy factor (UEF)	0.92	0.92	0.92	0.92
First hour rate (gallons)	18	10	6	2.5
Operating water pressure	150 psi	150 psi	150 psi	150 psi
WARRANTY				
Parts warranty	8-year limited	8-year limited	8-year limited	8-year limited

\*Household sizing based on back-to-back showers, 8 minutes long.



GE REALMAX™ ATMOSPHERIC NATURAL GAS WATER HEATERS

	GE					
	GG30S08BXR	GG30T08BXR	GG40S12BXR GG40S10BXR GG40S08BXR	GG40T12BXR GG40T10BXR GG40T08BXR	GG50S10BXR GG50S08BXR	GG50T12BXR GG50T10BXR GG50T08BXR
Rated capacity (gallons)	30	30	40	40	50	50
Nominal capacity (gallons)	30	30	40	40	50	50
FEATURES						
Family size*	1-3	1-3	2-4	2-4	3-5+	3-5+
Control type	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Self-diagnostic control	Yes—LED	Yes—LED	Yes—LED	Yes—LED	Yes—LED	Yes—LED
Temperature setting	45-160° F Range	45-160° F Range	45-160° F Range	45-160° F Range	45-160° F Range	45-160° F Range
Temperature setting factory default	120° F	120° F	120° F	120° F	120° F	120° F
Drain valve type	Polymer	Polymer	Brass Polymer Polymer	Brass Polymer Polymer	Polymer Polymer	Brass Polymer Polymer
WEIGHTS & DIMENSIONS						
Approx. shipping weight (lbs.)	118	119	140	147	172	169
Height to water connection (in.)	47-1/5	58-1/5	49-1/4	58-9/10	46-2/3	58-1/3
Tank dimensions (diameter x height) (in.)	20 x 45-1/2	18 x 56-1/2	22 x 47-1/2	20 x 57-1/4	25 x 45	22 x 56-3/4
Connection sizes—hot water outlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Connection sizes—hot water inlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
POWER/RATINGS						
Burner BTU size (K)	34	38	38	40	40	40
Uniform energy factor (UEF)	0.6	0.6	0.64	0.64	0.63	0.63
First hour rate (gallons)	67	74	83	84	87	86
Operating water pressure	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi
WARRANTY						
Parts warranty	8-year limited	8-year limited	12/10/8-year limited	12/10/8-year limited	10/8-year limited	12/10/8-year limited

\*Household sizing based on back-to-back showers, 8 minutes long.

GE REALMAX ATMOSPHERIC LIQUID PROPANE WATER HEATERS

	GE				
	GP30S08BXR	GP30T08BXR	GP40S12BXR GP40S10BXR GP40S08BXR	GP40T12BXR GP40T10BXR GP40T08BXR	GP50T12BXR GP50T10BXR GP50T08BXR
Rated capacity (gallons)	30	30	40	40	50
Nominal capacity (gallons)	30	30	40	40	50
FEATURES					
Family size*	1-3	1-3	2-4	2-4	3-5+
Control type	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Self-diagnostic control	Yes—LED	Yes—LED	Yes—LED	Yes—LED	Yes—LED
Temperature setting	45-160° F Range	45-160° F Range	45-160° F Range	45-160° F Range	45-160° F Range
Temperature setting factory default	120° F	120° F	120° F	120° F	120° F
Drain valve type	Polymer	Polymer	Brass Polymer Polymer	Brass Polymer Polymer	Brass Polymer Polymer
WEIGHTS & DIMENSIONS					
Approx. shipping weight (lbs.)	118	119	140	147	169
Height to water connection (in.)	47-1/5	58-1/5	49-1/4	58-9/10	58-1/3
Tank dimensions (diameter x height) (in.)	20 x 45-1/2	18 x 56-1/2	22 x 47-1/2	20 x 57-1/4	22 x 56-3/4
Connection sizes—hot water outlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"
Connection sizes—hot water inlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"
POWER/RATINGS					
Burner BTU size (K)	34	36	35	36	36
Uniform energy factor (UEF)	0.6	0.6	0.64	0.64	0.63
First hour rate (gallons)	67	74	84	84	86
Operating water pressure	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi
WARRANTY					
Parts warranty	8-year limited	8-year limited	12/10/8-year limited	12/10/8-year limited	12/10/8-year limited

\*Household sizing based on back-to-back showers, 8 minutes long.

TANKLESS ELECTRIC WATER HEATERS

	GE							
	GE04SNLPDG	GE06SNHPDG	GE08SNHPDG	GE11SNHPDG	GE15SNHPDG	GE18SNHPDG	GE24DNHPDG	GE27DNHPDG
FEATURES								
Fuel type	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric
Temperature setting	86-140° F Range	86-140° F Range	86-140° F Range	86-140° F Range	86-140° F Range	86-140° F Range	86-140° F Range	86-140° F Range
Temperature setting factory default	105° F	105° F	105° F	105° F	105° F	105° F	105° F	105° F
Activation flowrate (GPM)	≤ 0.3	≤ 0.3	≤ 0.4	≤ 0.4	≤ 0.4	≤ 0.5	≤ 0.5	≤ 0.5
Capacity (GPM) @ 37° F inlet	0.3	0.5	0.7	1.1	1.5	2.0	2.7	3.0
Capacity (GPM) @ 42° F inlet	0.3	0.5	0.8	1.3	1.7	2.1	2.9	3.3
Capacity (GPM) @ 47° F inlet	0.4	0.6	0.8	1.3	1.8	2.3	3.1	3.4
Capacity (GPM) @ 52° F inlet	0.4	0.7	0.9	1.5	2.0	2.4	3.4	3.8
Capacity (GPM) @ 57° F inlet	0.5	0.7	1.1	1.7	2.1	2.6	3.6	4.2
Capacity (GPM) @ 62° F inlet	0.5	0.9	1.3	1.9	2.3	2.9	3.9	4.4
Capacity (GPM) @ 67° F inlet	0.6	1.1	1.6	2.2	2.6	3.4	4.6	5.1
Capacity (GPM) @ 72° F inlet	0.7	1.2	1.7	2.5	2.9	3.8	5.3	5.4
Capacity (GPM) @ 77° F inlet	0.8	1.4	2.0	2.8	3.4	4.5	6.0	6.2
Controls	Adjust degree Fahrenheit/Celsius. Adjustable Temperature. Digital Electronic Control							
Installation location	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor
Integrated safety devices	Flow sensor/High-limit thermostat (on each heating element). Inlet Temperature Sensor. Material Rated for Ignition Containment. Outlet Temperature Sensor.							
Maximum outlet temperature (F)	140	140	140	140	140	140	140	140
Point of use	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Temperature adjustment amount (degree)	1	1	1	1	1	1	1	1
Uniform energy factor (UEF)	>0.91	>0.91	>0.91	>0.91	>0.91	>0.91	>0.91	>0.91
Water connection location	Bottom	Bottom	Bottom	Bottom	Bottom	Bottom	Bottom	Bottom
Cold/hot water connections (inches)	1/2" Cold Water Inlet; 1/2" Hot Water Outlet	1/2" Cold Water Inlet; 1/2" Hot Water Outlet	1/2" Cold Water Inlet; 1/2" Hot Water Outlet	1/2" Cold Water Inlet; 1/2" Hot Water Outlet	1/2" Cold Water Inlet; 1/2" Hot Water Outlet	3/4" Cold Water Inlet; 3/4" Hot Water Outlet	3/4" Cold Water Inlet; 3/4" Hot Water Outlet	3/4" Cold Water Inlet; 3/4" Hot Water Outlet
Max. operating pressure (psi)	150	150	150	150	150	150	150	150
Min. operating pressure (psi)	25	25	25	25	25	25	25	25
APPEARANCE								
Installation	Wall Mounted	Wall Mounted	Wall Mounted	Wall Mounted	Wall Mounted	Wall Mounted	Wall Mounted	Wall Mounted
WEIGHT & DIMENSIONS								
Overall depth	3.4	2.4	3.7	3.7	2.4	3.7	3.4	2.4
Overall height	9.8	14.1	15.2	15.2	14.2	15.2	9.8	14.2
Overall width	10	8.5	10.2	10.2	8.5	10.2	10	8.5
Approximate shipping weight	6	6	10	10	10	15	15	15
Net weight	5	5	10	10	10	14	14	14
POWER/RATINGS								
Amps	29.2	22.9	33.3	45.8	60.8	75.0	100.0	112.5
Electrical circuit required	30 Amp	30 Amp	40 Amp	50 Amp	70 Amp	40 Amp (x2)	40 Amp (x3)	40 Amp (x3)
Power rating-kW (derated for 208V)	3.5	5.5 (4.8)	8 (6.9)	11 (9.5)	14.6 (11.3)	18 (15.6)	24 (20.8)	27 (23.4)
Voltage (max.)	120.0	240.0	240.0	240.0	240.0	240.0	240.0	240.0
Voltage (min.)		208.0	208.0	208.0	208.0	208.0	208.0	208.0
WARRANTY								
Warranty	5-year limited replacement							

SOLAR WATER HEATERS

	GE		
	GT50C10BAM GEOSPRING™ SOLAR	GT40C10BAM GEOSPRING SOLAR	GT25C10BAM GEOSPRING SOLAR
Rated capacity (gallons)	51	38	24
FEATURES			
Configuration	Integrated collector storage	Integrated collector storage	Integrated collector storage
Cold/hot water connections (in.)	3/4 mnpt	3/4 mnpt	3/4 mnpt
Collector inclination angle from horizontal	20° to 75°	20° to 75°	20° to 75°
Liquid type	Water	Water	Water
Maximum operating pressure (psi)	60	60	60
Net collector area (sq. ft.)	23	17	10
WEIGHT & DIMENSIONS			
Approx. weight (with mount, no water) (lbs.)	168	125	83
Approx. weight (with mount, with water) (lbs.)	593	441	279
Collector outer dimensions (in.)	86 x 43 x 8	86 x 32 x 8	86 x 20 x 8
Maximum height mount 45°/30° (in.)	36/28	28/22	19/16
WARRANTY			
Parts warranty	10 years	10 years	10 years

WATER SOFTENERS

	GE				
	GXSHC40N	GXMH31H	GXSH45V	GXSH40V	GXSF30V
CAPACITY					
Capacity (grains)	40,000	31,100	45,100*	40,000*	30,400
FEATURES					
	●				
WiFi Connect	Water Usage Tracking Water Flow Alerts Remote Water Shutoff Salt Reminders				
Efficiency (grains per lb.-salt)	5,100	4,240**	5,090**	5,100**	4,700**
Max. hardness removal (gpg)	110	120	160	110	95
Max. clear water iron reduction (ppm)	8	3	10	8	8
Resin filter type	Standard mesh	Standard mesh	Standard mesh	Standard mesh	Standard mesh
Resin quantity (cu. ft.)	1.1	.98	1.25	1.1	.83
Activated charcoal quantity (cu. ft)	N/A	.26	N/A	N/A	N/A
Resin tank size (in.)	9 x 40	10 x 40	10 x 40	9 x 40	9 x 35
Salt capacity (lbs.)	230	230	230	230	200
Regeneration time (min.)	94 to 134	105 to 152	105 to 152	94 to 134	73 to 104
Service flow rate (at 15 psi drop)	9.5	8	9.5	9.5	7.5
Installation pack	●	●	●	●	●
Batteryless memory	●	●	●	●	●
Electronic controls	●	●	●	●	●
SmartSoft™ technology	●	●	●	●	●
Custom Select™ blending valve	●	●	●	●	
Salt Saver button/light	Automatic	●	●	●	
"Days to Empty" indicator	●	●	●	●	●
Low salt indicator	●	●	●	●	●
Status light indicator	●	●	●	●	●
Sediment filter	●	●	●	●	
Audible alarm	●	●	●	●	●
Advanced system monitor	●		●	●	
Valve size	High flow	High flow	High flow	High flow	Standard flow
Plumbing connections	Up to 1-1/4"	Up to 1-1/4"	Up to 1-1/4"	Up to 1-1/4"	Up to 1"
Water supply maximum clear water iron (ppm)***	8	3	10	8	8
Water pressure limits (minimum-maximum psi)*	20-125	20-125	20-125	20-125	20-125
Rated capacity at chlorine concentration†† of:	.050 ppm .075 ppm 1.0 ppm 1.5 ppm 2.0 ppm	2,282,000 gal. 1,520,000 gal. 1,140,000 gal. 760,000 gal. 570,000 gal.			
APPEARANCE					
Style	Sculpted	Sculpted-tall	Sculpted-tall	Sculpted-tall	Sculpted-short
Unit color/trim	Light gray/Light blue	Light gray/Blue	Light gray/Dark gray	Light gray/Dark gray	Light gray/Dark gray
Electronic demand driven	●	●	●	●	●
WEIGHTS & DIMENSIONS					
Approx. ship. wt. (lbs.)	107	119	119	105	91
Overall W x H x D (in.)	14-7/8 x 47-5/8 x 22-7/16	14-7/16 x 47-5/8 x 22-7/16	14-7/16 x 47-5/8 x 22-7/16	14-7/16 x 47-5/8 x 22-7/16	14-7/16 x 43-1/4 x 22-7/16
POWER/RATINGS					
Electrical rating	24V, 60Hz	24V, 60Hz	24V, 60Hz	24V, 60Hz	24V, 60Hz

This system conforms to NSF/ANSI 42 & 44 for the specific performance claims as verified and substantiated by test data.

\*Testing was performed using pellet grade sodium chloride as the regenerate salt.

\*\*Efficiency rating is valid only at the lowest stated salt damage. These softeners were efficiency rated according to NSF/ANSI 44.

\*\*\*Extent of iron removal may vary with conditions. The capacity to reduce clear water iron is substantiated by WQA test data. State of Wisconsin requires additional treatment if water supply contains greater than 5 ppm clear water iron.

†Canada working pressure limits: 1.4-7.0 kg/cm2.

††Typical residential chlorine concentration is 0.5 to 1.0 ppm.

**Important:** All units must be installed according to local codes. **Note:** Before installing, see installation instructions packed with product for complete details, or call GE QuickSpecs 800-432-3729.

WHOLE HOUSE FILTRATION SYSTEM

	GE					
	GXWH70M	GXWH50M	GXWH40L**	GXWH35F**	GXWH20S	GXWH04F**
FEATURES						
Feed water pressure (psi)	20 min.-125 max. 25 min.-125 max.	20 min.-125 max.	20 min.-100 max.	20 min.-125 max.	20 min.-125 max.	20 min.-125 max.
Feed water temperature	40°-100°F	40°-100°F	40°-100°F	40°-100°F	40°-100°F	40°-100°F
Rated flow rate (gpm)	4.0	4.0	4.0	4.0	4.0	4.0
Maximum flow rate (gpm)	12.0	12.0	15.0	15.0	12.0	12.0
	Water Usage Tracking Water Flow Alerts Remote Water Shutoff Salt Reminders					
WiFi Connect						
Filter change indicator	Connected alerts/monitoring on smartphone	Remote timer	Remote timer	Remote timer	Remote timer	Remote timer
Filters	FTHLM (Premium) FTHTM (Advanced) FTHPM (Basic)	FTHLM (Premium) FTHTM (Advanced) FTHPM (Basic)	FXHTC (Advanced) FXHSC (Basic)	FXHTC (Advanced) FXHSC (Basic)	FXWTC (Advanced) FXUSC (Basic) FXWPC (Basic) FXWSC (Basic)	FXWTC (Advanced) FXUSC (Basic) FXWPC (Basic) FXWSC (Basic)
Port size	3/4" (1" requires additional fitting)	3/4" (1" requires additional fitting)	1"	1"	3/4"	3/4"
Port threads/connections	3/4" Push-to-connect	3/4" Push-to-connect	NPT	NPT	NPT	NPT
Compatible pipe connections	Vertical or horizontal	Vertical or horizontal	Horizontal only	Horizontal only	Horizontal only	Horizontal only
Pressure relief valve	●	●	●	●	●	●
Mounting bracket & hardware	●	●	●	●	●	●
Wrench	N/A	N/A	●	●	●	●
APPEARANCE						
Style	Twist lock (open sump)	Twist lock (open sump)	Drop-in style (open sump)	Drop-in style (open sump)	Drop-in style (open sump)	Drop-in style (open sump)
Unit color	White	White	White	White	White	White
Filter housing	Clear	Clear	Clear	Opaque	Clear	Opaque
WEIGHTS & DIMENSIONS						
Approx. shipping wt. (lbs.)	11.50/16.01	10.8	9.75	7.50	4	2.50
Overall W x H x D (in.)	15-1/2 x 12-1/4 x 14-1/2	15-1/2 x 12-1/4 x 14-1/2	8 x 16-3/4 x 8	7-3/4 x 13-1/2 x 7-1/2	5-1/2 x 14-1/2 x 5-1/2	5-1/4 x 12-1/4 x 5-1/4

\*\*Filter not included

UNDER SINK REVERSE OSMOSIS FILTRATION SYSTEMS

	GE
	GXRQ18NBN GRNQ18NBN
CAPACITY	
Tank size (gallons)	3
FEATURES	
Faucet	Brushed Nickel
Faucet color	Brushed Nickel
Faucet monitor	Electronic timer
Faucet mounting	Vertical
Filter change indicator	LED
Feed water pressure (psi)	40 Min.-100 Max.
Feed water temperature	40°-100°F
Maximum feed water TDS (ppm)	2,000
Maximum hardness (@ 6.9 pH)	10 grains
Feed water pH limits	4-10
Process water used (per gal.)	10.4
Auto shut-off	●
FILTERS & MEMBRANE	
Quick-Replace filter design	●
RO membrane	FQ18MN
Filters	FQ18MN/FQ18PN
Filter life	6 months
Filtration level	Premium
Impurities reduced	95 impurities See chart to the right.
Fitting style	Push-to-connect
Water inlet valve	Saddle valve
Under sink installation kit	●
FILTER APPEARANCE	
Style	Compression
Unit color	White
Filter housing	White
Mounting bracket	Vertical
WEIGHTS & DIMENSIONS	
Approx. shipping weight (lbs.)	14.2
Overall W x H x D (in.)	9-1/4 x 3-5/8 x 12-1/2
POWER/RATINGS	

Faucet monitor power requirement: 1 CR2032 lithium 3v (included)

\*Theoretical tank capacity. When tested according to NSF/ANSI Standard 58 at 50 psig inlet pressure, tank capacity is 2.3 gallons.

\*\*Feed water = 50 psig, 77°F, pH = 7.5 ± 5 and 750 ppm TDS as sodium chloride. Product water produced, amount of waste and percent rejection will vary with changes in pressure, temperature and total dissolved solids. Feed water over 10 grains of hardness may affect performance of the filtration system.

GXRQ18NBN (Impurities Reduced)	
Chlorine Taste and Odor, Particulates (Sediment)	Dichloroacetoneitrile (haloacetoneitrile)
Ammonium	Dinoseb
Asbestos	Endrin
Arsenic	Estrone
Barium	Ethylbenzene
Bicarbonate	Ethylene dibromide
Bromide	Heptachlor
Cadmium	Heptachlor epoxide
Chloride	Hexachlorobutadiene
Chromium (hexavalent)	Simazine
Chromium (trivalent)	Styrene
Copper	TCEP
Cysts	TCPP
Fluoride	Tetrachloroethylene
Lead	Toluene
Magnesium	Trans-1,2-dichloroethylene
Nitrate	Tribromoacetic acid
Nitrite	Trichloroacetoneitrile (haloacetoneitrile)
Radium 226/228	Trichloroethylene
Selenium	Trimethoprim
Sodium	Xylenes VOC Surrogate
Sulfate	1,1,1-trichloro-2-propanone (haloketones)
Tannin	1,1,1-trichloroethane
TDS	1,1,2,2-Tetrachloroethylene
Turbidity	1,1,2-trichloroethane
Zinc	1,1-dichloro-2-propanone (haloketones)
Alachlor	1,1-dichloroethylene
Atrazine	1,2,4-Trichlorobenzine
Atenolol	1,2-dichloroethane
Benzene	1,2-dichloropropane
Bisphenol A	2,4,5-TP (silvex)
Bromochloroacetoneitrile (haloacetoneitrile)	2,4-D
Bromodichloromethane (trihalomethanes)	Hexachlorocyclopentadiene
Bromoform (trihalomethanes)	Ibuprofen
Carbamazepine	Lindane
Carbofuran	Linuron
Carbon Tetrachloride	MTBE
Chlorobenzene	Meprobamate
Chlorodibromomethane (trihalomethanes)	Methoxychlor
Chloroform (trihalomethanes)	Metolachlor
Chloropicrin	Naproxen
cis-1,2-dichloroethylene	Nonyl phenol
cis-1,3-dichloropropylene	o-Dichlorobenzene
DEET	p-Dichlorobenzene
Dibromoacetoneitrile (haloacetoneitrile)	PFOA
Dibromochloropropane	PFOS
	Pentachlorophenol
	Phenytoin

WHOLE HOUSE FILTERS

	GXWH50/70 REPLACEMENT FILTERS			HIGH-FLOW DROP-IN REPLACEMENT FILTERS		STANDARD-FLOW DROP-IN REPLACEMENT FILTERS			
	FTHLM	FTHTM	FTHPM	FXHTC	FXHSC	FXWTC	FXUSC	FXWPC	FXWSC
FILTER TYPE	Carbon block	Granulated carbon	Polypropylene	Granulated carbon	Pleated paper	Carbon paper	Polyspun	Pleated paper	String wound
Filter capacity (gallons)	15,000	20,000	15,000	30,000	24,000	700	16,000	16,000	16,000
Filter life	3 months	3 months	3 months	3 months	3 months	3 months	3 months	3 months	3 months
Filtration level	Premium	Advanced	Basic	Advanced	Basic	Advanced	Basic	Basic	Basic
Lead reduction	●								
Chlorine: Taste & Odor reduction	●	●		●		●			
Particulate reduction	0.5 micron	5 micron	30 micron	25 micron	30 micron	5 micron	30 to 50 micron	30 micron	30 micron
Sand reduction	●	●	●	●	●	●	●	●	●
Soil reduction	●	●	●	●	●	●	●	●	●
Silt reduction	●	●	●	●	●	●	●	●	●
Sediment reduction	●	●	●	●	●	●	●	●	●



UNDER SINK FILTRATION SYSTEMS

	QUICK-REPLACE FILTER SYSTEMS			DROP-IN FILTER SYSTEMS
	GXK285JBL GNK285KBL	GXK185KBL	GXULQK	GX1S01R**
FEATURES				
Faucet	Filtration controller	Filtration controller		UNFCTFBL (purchase separately)
Filtration controller	Chrome	Chrome		
Faucet monitor	Electronic timer	Electronic timer		
Faucet mounting	Above sink	Above sink		
Filter change indicator	Red blinking flash	Red blinking flash	Magnetic filter reminder light	
Feed water pressure (psi)	35 min.–120 max.	20 min.-125 max	20 min.–100 max.	35 min.–125 max.
Feed water temperature	33°–100°F	33°–100°F	34°–100°F	34°–100°F
Filtered water flow (gpm)	1.1	0.75	2	See filter options below
FILTERS & MEMBRANE				
Quick-Replace filter design	●	●	●	
Filter	FQK2J	FQK1K	GXULQR	FXUTC, FXULC, or FXUVC
Filter cartridges	Engineered carbon blocks	Carbon block	Carbon block	Carbon block
Filter capacity	300 gallons	150 gallons	2,000 gallons	See filter options below
Filtration level	Advanced	Advanced	Advanced	See filter options below
Filter life	6 months	6 months	6 months	See filter options below
Pharmaceutical reduction	Select pharmaceuticals	Select pharmaceuticals		
VOC reduction (%)	Select VOCs	Select VOCs		See filter options below
Lead reduction (%)	99.3	99.3	99	See filter options below
Cyst reduction (%)		99.99		See filter options below
Mercury reduction (%)	96	96.2		See filter options below
Chlorine: Taste & Odor reduction (%)	97	97.2	99	See filter options below
Turbidity reduction (%)		98.1		See filter options below
Asbestos reduction (%)				See filter options below
Atrazine reduction (%)	94.5	94.5		See filter options below
Lindane reduction (%)	98.5	98.5		See filter options below
Particulate reduction (%)*	93.3	99	99.8	See filter options below
Fitting style	3/8" Push-to-connect	3/8" Push-to-connect	3/8" Push-to-connect	3/8" NPT
Water inlet valve	Push-to-connect adaptor	Push-to-connect adaptor	Compression fitting	
Under sink installation kit	●	●	●	●
APPEARANCE				
Style	1/4 turn encapsulated	1/4 turn encapsulated	1/4 turn encapsulated	Threaded open sump
Unit color	Light gray	Light gray	White	White
Filter housing	Light gray	Light gray	White	White
Mounting bracket	Horizontal or vertical	Horizontal or vertical	Horizontal or vertical	Vertical
WEIGHTS & DIMENS.				
Approx. ship. wt. (lbs.)	4.0	2.5	3.6	2.3
Overall W x H x D (in.)	7 x 12 x 4-1/2	6-3/4 x 11-1/2 x 5-1/4	8-1/4 x 14-1/2 x 4-1/2	4-3/4 x 13-1/2 x 5
POWER/RATINGS				
Faucet monitor power requirement			1 CR2032 Lithium 3v (included)	
Filtration controller power requirement	2 AA batteries (included)	2 AA batteries (included)		

**Caution:** Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.  
\*0.5-1 micron nominal.  
\*\*Filter not included.

UNDER SINK FILTERS

	DROP-IN REPLACEMENT FILTERS		
	FXUTC	FXULC	FXUVC
FEATURES			
Filtered water flow (gpm)	1	0.6	0.5
FILTERS & MEMBRANE			
Filter cartridges	Carbon block	Carbon block	Carbon block
Filter capacity	3,000 gallons	600 gallons	500 gallons
Filtration level	Basic	Advanced	Advanced
Filter life	6 months	6 months	6 months
VOC reduction (%)			99.8
Lead reduction (%)		99.3	99.3
Cyst reduction (%)		99.99	99.99
Mercury reduction (%)		96.4	96.4
Chlorine: Taste & Odor reduction (%)	97.5	97.5	97.6
Turbidity reduction (%)		97.9	98.5
Asbestos reduction (%)		99	99
Atrazine reduction (%)		90.8	
Lindane reduction (%)		99	96.8
Particulate reduction (%)*	99.3	99.7	99.9

**Caution:** Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.  
\*Impurities not necessarily in all users' water

ENERGY STAR® CERTIFIED ELECTRONIC ROOM AIR CONDITIONERS

	GE						
	230 VOLT		115 VOLT				
	AHFK24BA	AHFK18BA	AHY14LZ	AHY12LZ	AHY10LZ	AHY08LZ	AHQ06LZ
ENERGY STAR® certified	Yes	Yes	Yes	Yes	Yes	Yes	No
FEATURES							
Refrigerant type	R32	R32	R32	R32	R32	R32	R32
BTU <sub>h</sub>	23,500/22,900	18,000/17,800	14,000	12,000	10,000	8,000	6,000
Voltage	230/208	230/208	115	115	115	115	115
CEER	9.8	11.3	11.3	11.4	11.4	11.4	11.0
Amps	10.4/11.3	7.0/7.5	11.2	9.4	7.8	6	4.7
Watts	2,375/2,325	1,580/1,540	1,220	1,035	865	695	535
Plug type	Perpendicular	Tandem	Parallel	Parallel	Parallel	Parallel	Parallel
Filter reminder light	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Energy Saver feature	Yes	Yes	Yes	Yes	Yes	Yes	Yes
24-hour on/off timer	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Dehumidification (pints/hr.)	7.2	4.9	4.1	3.2	2.5	2.1	1.6
Fan speeds (Cool/Fan Only)	3/3	3/3	3/3	3/3	3/3	3/3	3/3
CFM (high shown) (indoor)	461/380	461/380	280/230	250/210	235/200	220/190	175-155-140
Thermostat	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Filter type	One-touch lift-out	One-touch lift-out	One-touch lift-out	One-touch lift-out	One-touch lift-out	One-touch lift-out	Slide-out
Chassis	Slide-out	Slide-out	Fixed	Fixed	Fixed	Fixed	Fixed
Window mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window opening height (min. in inches)	19-1/8	19-1/8	15-5/8	14-9/16	14-9/16	13-3/8	13-3/8
Window opening width (min. in inches)	30	30	26-1/8	25	25	24-1/2	21-7/8
Window opening width (max. in inches)	39	39	37-3/4	36-5/8	36-5/8	36	36
Overall dimensions (WxHxD in inches)	25-7/8 x 18-1/4 x 26-5/16	25-7/8 x 18-1/4 x 26-5/16	25-7/8 x 18-1/4 x 26-5/16	25-7/8 x 18-1/4 x 26-5/16	19 x 14-1/2 x 19-13/16	19 x 14-1/2 x 19-13/16	16-7/16 x 12-9/16 x 15
Net weight (lbs.)	127.6	118.8	72.45	66.33	58.3	49.7	38.92
Approx. shipping weight (lbs.)	147.4	138.6	80.35	75.16	66	54.2	43.56

ULTRA-QUIET ROOM AIR CONDITIONERS

	GE PROFILE™					
	PHC08LY	PHC06LY	CLEARVIEW™ AHTT06BC	AHTT08BC	INVERTER AHTR10AC	AHTR12AC
FEATURES						
Claims & certification	AHAM, EEV, cUL, Rohs, UL	AHAM, EEV, cUL, Rohs, UL	AHAM, UL	AHAM, UL	AHAM, cUL, ETA, UL	AHAM, cUL, ETA, UL
ENERGY STAR certified	Yes	Yes	Yes	Yes	Yes	Yes
Area to cool	250-350	150-250	150-250	250-350	350-450	450-550
Cooling BTU <sub>h</sub>	6,150	8,100	6,000	8,000	10,100	12,000
Dehumidification (pts./hr.)	2.1	1.5	1.3	1.7	1.56	1.6
CEER rating	11.2	12.1	11.5	11.4	15.7	15.4
Cooling—Watts	710	490	510	710	830	1090
Volts/Hertz	115/60	115/60	115/60	115/60	115/60	115/60
Plug capacity (Volts/Amps)	125/15	120/10	115/15	115/15	115/15	115/60
Cooling—rated cooling amps AHAM	6.2	4.4	4.6	6.3	11.0	11.9
Airflow volume CFM (high/med/low)	240/210/170	200	TBD*	TBD*	260/180	280/180
Energy Saver	Yes	Yes	Yes	Yes	Yes	Yes
Installation	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Chassis type	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
Fan speed selections	3 Cooling, 3 Fan Only	3 Cooling, 3 Fan Only	3 Cooling, 3 Fan Only	3 Cooling, 3 Fan Only	4 Cooling, 4 Fan Only	4 Cooling, 4 Fan Only
Easy-access washable filter	Yes	Yes	Yes	Yes	Yes	Yes
Air discharge	2-way	2-way	2-way	2-way	4-way	4-way
Vent/air exchange exhaust	Top	Top	Top	Top	Top	Top
Remote control	Yes	Yes	Yes	Yes	Yes	Yes
Electronic thermostat	Yes	Yes	Yes	Yes	Yes	Yes
Auto restart	Yes	Yes	Yes	Yes		
Digital time, temp display	Yes	Yes	Yes	Yes	Yes	Yes
Power cord length (ft.)	6	6	6	6	6	6
Delay timer	24-hour on/off	24-hour on/off	24-hour on/off	24-hour on/off	24-hour on/off	24-hour on/off
Check filter reminder	Yes	Yes	Yes	Yes		
Sleep function	Through WiFi app	Through WiFi app	Through WiFi app	Through WiFi app		
Approximate shipping weight (lbs.)	65	68	72.8	75	73	76
Min.   Max. window opening width (in.)	26   39-1/2	26-1/16   39-1/4	20   40	20   40	26-3/8   40-1/2	26-3/8   40-1/2
Minimum window opening height (in.)	13-3/8	13-3/8	13	13	14-1/16	14-9/16
Net weight (lbs.)	57	56	81.6	83.8	65	68
Overall dimensions (WxHxD in inches)	19 x 14-3/8 x 18-1/8	21-1/4 x 12-7/16 x 18-1/8	19.57 x 12.72 x 27.98	19.57 x 12.72 x 27.98	20-33/64 x 13-29/32 x 19-57/64	30-33/64 x 14-7/32 x 19-57/64

\*Information available online at geappliances.com.

WINDOW AIR CONDITIONER WARRANTY

One-year limited warranty on entire unit. In-home service. Parts and labor included. See written warranty for details.

Preliminary specifications subject to change. While limited quantities last.

MECHANICAL ROOM  
AIR CONDITIONER

	GE
	AHV05LZ
FEATURES	
Refrigerant type	R32
BTUh	5,050
Voltage	115
CEER	11
Amps	4.1
Watts	455
Plug type	Parallel
Dehumidification (pints/hr.)	1
Fan speeds (Cool/Fan Only)	2/2
CFM (high shown) (indoor)	135
Thermostat	Mechanical
Filter type	Slide-out
Chassis	Fixed
Window mounting	EZ Mount
Window opening height (min. in inches)	13-3/8
Window opening width (min. in inches)	21-7/8
Window opening width (max. in inches)	36
Overall dimensions (WxHxD in inches)	16-7/16 x 12-9/16 x 15
Net weight (lbs.)	35.93
Approx. shipping weight (lbs.)	41.7

HEAT/COOL SERIES

	GE			
	AHE24DZ	AHE18DZ	AHE12DZ	AHE08AZ
FEATURES				
Refrigerant type	R410A	R410A	R410A	R410A
BTU-AHAM	23,500	18,000	12,000	8,000
Voltage	230/208	230/208	230/208	115
CEER	9.4	10.7	10.9	10.9
Amps-AHAM	11.1/12.0	7.5/8.2	4.9/5.4	6.8
Watts input	2,480/2,420	1,660/1,640	1,090/1,060	725
Dehumidification (pints/hr.)	3.4	2.4	3.46	1.55
ELECTRIC RESISTANCE HEATING				
BTUh	11,000/8,500	11,000/8,500	10,700/8,700	3,700
Amps	16.0/15.0	16.0/15.0	15.5/14.5	11.9
Watts	3,670/3,090	3,670/3,090	3,135/2,549	1,084
Electronic controls	Yes	Yes	Yes	Yes
Line cord plug	Perpendicular	Perpendicular	Perpendicular	Parallel
Recommended circuit protection (time delay)	20 amps	20 amps	20 amps	15 amps
	3 Heating 3 Cooling 3 Fan	3 Heating 3 Cooling 3 Fan	3 Heating 3 Cooling 3 Fan	3 Heating 3 Cooling 3 Fan
Fan speeds	3	3	3	3
Fan Only setting	3	3	3	3
Airflow (CFM) roomside high/low	450/360	450/360	275/230	286/240
Air exchange exhaust	Top air discharge	Top air discharge	Top air discharge	Top air discharge
Rotary compressor	Yes	Yes	Yes	Yes
Slide-out chassis	Yes	Yes	Yes	Yes
Window installation kit	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Min. window opening height (in.)	19-1/8	19-1/8	16-7/8	16-7/8
Min. window opening width (in.)	30	30	27	27
Max. window opening width (in.)	39	39	35-1/4	35-1/4
Overall dimensions (WxHxD in inches)	25-7/8 x 26-5/16 x 18-1/4	25-7/8 x 26-5/16 x 18-1/4	22-9/16 x 16 x 24-1/2	22-9/16 x 16 x 24-1/2
Net weight (lbs.)	135	117	91	80
Approx. shipping weight (lbs.)	152	128	104	93

Not intended to be a primary source of heat.



**Parallel**  
115V  
15 Amp



**Tandem**  
230/208V  
15 Amp



**Perpendicular**  
230/208V  
20 Amp

Wall outlets

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

**Note:** Aluminum building wiring may pose special problems—consult a qualified electrician.

PORTABLE AIR CONDITIONERS

	GE						
	APFA08YBMW	APFA10YBMW	APCA10YBMW	APCA11YBMW	APWA14YBMW	APSA13YBMW	APCA14YBMW
FEATURES							
Refrigerant type	R32	R32	R32	R32	R32	R32	R32
BTUH (ASHRAE) (cool/heat)	8,000	9,000	10,000	11,000	14,000	13,000	14,000
BTUH (SACC) (cool/heat)	5,100	6,100	7,100	7,800	10,000	9,500	10,000
Recommended room size (sq. ft.)	150-200	up to 250	up to 300	up to 350	up to 450	up to 400	up to 450
Voltage	115	115	115	115	115	115	115
Amps (cool/heat)	7.0	8.0	8.5	9.2	12	12	12
Watts (cool/heat)	800	900	980	1,050	1,350	1,350	1,350
Line cord plug	5-15P	5-15P	5-15P	5-15P	5-15P	5-15P	5-15P
24-hour on/off timer	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Easy-roll casters	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Dehumidification (pints/day)	50	60	75	90	100	80	100
Auto start	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Fan speeds (Cool/Fan Only)	2/0	2/0	3/3	3/3	3/3	3/3 (3 for heat)	3/3
CFM (high shown) (indoor)	175	175	175	185	250	250	250
Thermostat	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Filter type	Permanent mesh	Permanent mesh	Permanent mesh	Permanent mesh	Permanent mesh	Permanent mesh	Permanent mesh
Window exhaust kit	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Exhaust hose length (ft.)	5	5	5	5	5	5	5
Installation	Required	Required	Required	Required	Required	Required	Required
CASE DIMENSIONS							
Height (in.)	26-1/5	26-1/5	24-7/10	24-7/10	32	32	32
Width (in.)	12	12	15-1/5	15-1/5	18-1/2	18-1/2	18-1/2
Depth (in.)	11-1/5	11-1/5	14	14	15-2/5	15-2/5	15-2/5
Net weight (lbs.)	58.4	61.7	51.6	51.6	70.5	75	70.5
Approx. shipping weight (lbs.)	69.4	72.7	66.4	66.4	90.0	94.0	90.0

DEHUMIDIFIERS

	GE				
	ADHR22LB	ADHR35LB	ADHR50LB	AWHR50LB	APHR50LB
FEATURES					
ENERGY STAR® certified	Yes	Yes	Yes	Yes	Yes
R-410A refrigerant	Yes	Yes	Yes	Yes	Yes
Dehumidification (pints/day)	22	35	50	50	50
Dry airflow (CFM) (high/med/low)	124/100	141/100	200/160	200/160	200/160
Electronic controls	Yes	Yes	Yes	Yes	Yes
Auto shut-off	Yes	Yes	Yes	Yes	Yes
Automatic defrost	Yes	Yes	Yes	Yes	Yes
Water level indicator	Yes	Yes	Yes	Yes	Yes
Fan speeds	3	3	3	3	3
Upfront removable bucket	Yes	Yes	Yes	Yes	Yes
Bucket capacity (pints)	8.5	8.5	15.0	15.0	15.0
External drain capability	Yes	Yes	Yes	Yes	Yes
Washable air filter	Yes	Yes	Yes	Yes	Yes
Easy-roll casters (4)	Yes	Yes	Yes	Yes	Yes
Voltage	115	115	115	115	115
Watts	250	365	530	530	530
Amps	2.6	3.5	5.0	5.0	5.0
Line cord plug	5-15P	5-15P	5-15P	5-15P	5-15P
Overall dimensions (WxHxD in inches)	13-1/5 x 19-2/5 x 9-9/10	13-1/5 x 19-2/5 x 9-9/10	14-2/5 x 24-1/10 x 11-2/5	14-2/5 x 24-1/10 x 11-2/5	14-2/5 x 24-1/10 x 11-2/5
Shipping weight (lbs.)	35.9	39.2	47.0	47.0	48.6
Net weight (lbs.)	33.2	36.5	42.8	42.8	44.0

See written warranty for details.

DEHUMIDIFIER WARRANTY

One-year limited product replacement warranty. See written warranty for details.



24” UNIVERSAL FIT WALL AIR CONDITIONERS

	GE						HEAT/COOL		
	COOL ONLY								
	AKCQ08ACH	AKCQ10ACH	AKCQ12ACH	AKCQ10DCH	AKCQ12DCH	AKCQ14DCH	AKEQ10DCH	AKEQ12DCH	AKEQ14DCH
Voltage—frequency (Hz)	115 - 60	115 - 60	115 - 60	230/208 - 60	230/208 - 60	230/208 - 60	230/208 - 60	230/208 - 60	230/208 - 60
COOLING CAPACITY									
BTUH—AHAM	8,550	10,000	12,000	10,200/9,900	12,100/11,750	14,000/14,000	10,000/9,800	12,000/11,600	14,000/13,600
Amps—AHAM	7.1	8.3	10.0	4.5/4.8	5.2/5.6	6.9/7.5	4.6/5.0	5.5/5.9	6.9/7.5
EER	10.6	10.6	10.5	10.6/10.6	10.5/10.5	9.3	9.6/9.6	9.5/9.5	9.3/9.5
CEER	10.6	10.6	10.5	10.6/10.6	10.5/10.5	9.3	9.6/9.6	9.5/9.5	9.3/9.5
ENERGY STAR® certified	Yes	Yes	Yes	Yes	Yes	No	No	No	No
Dehumidification (pints/hr.)	2.5	3.0	3.6	3.0	3.6	3.6	3.0	3.6	3.6
FEATURES									
Refrigerant type/capacity	R-410A 17.64 oz.	R-410A 20.81 oz.	R-410A 21.87 oz.	R-410A 20.81 oz.	R-410A 21.87 oz.	R-410A 21.52 oz.	R-410A 17.99 oz.	R-410A 21.87 oz.	R-410A 21.52 oz.
Resistance heat BTU							10,600/8,600	10,600/8,600	10,600/8,600
Resistance heat Amp							15/13.5	15/13.5	15/13.5
Resistance heat Watts							3,450/2,821	3,450/2,821	3,450/2,821
Fan speeds	3	3	3	3	3	3	3	3	3
Air flow volume (CFM)									
High	252	269	286	275	277	295	292	286	282
Med	217	234	258	240	258	275	275	264	263
Low	189	203	235	209	235	252	252	240	244
Compressor type	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
Plug capacity (15A circuit size)	125V/120V/15A	125V/120V/15A	125V/120V/15A	240V/250V/15A	240V/250V/15A	240V/250V/15A	240V/20A	240V/20A	240V/20A
Line cord plug/configuration	A / 5-15P	A / 5-15P	A / 5-15P	B / 6-15P	B / 6-15P	B / 6-15P	6-20P	6-20P	6-20P
On/Off timer (24 hour)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Energy saver (Eco Mode)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Auto Fan	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Dehumidify function	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Sleep mode	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Wall sleeve (sold separately)—RAB24, RAB26*, RAB46*, RAB48*	Optional, not included	Optional, not included	Optional, not included	Optional, not included	Optional, not included	Optional, not included	Optional, not included	Optional, not included	Optional, not included
Installation	Wall	Wall	Wall	Wall	Wall	Wall	Wall	Wall	Wall
Wall case required	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
WEIGHTS & DIMENSIONS									
Width (in.)	24-4/19	24-4/19	24-4/19	24-4/19	24-4/19	24-4/19	24-4/19	24-4/19	24-4/19
Height (in.)	14-9/17	14-9/17	14-9/17	14-9/17	14-9/17	14-9/17	14-9/17	14-9/17	14-9/17
Depth (in.)	19	19	19	19	19	19	19	19	19
Net weight (lbs.)	66	69	77	69	76	77	69	79	80
Approx. shipping weight (lbs.)	77	81	88	81	87	89	80	90	91

\*Must use provided trim kit.

BUILT-IN “J” SERIES—WIFI HEAT/COOL

	GE				HIGH-MOUNT
	STANDARD INSTALLATION				
	AJEQ08AWH	AJEQ10DWH	AJEQ12DWH	AJEQ14DWH	AJEM12DWH
ADA compliant	Yes	Yes	Yes	Yes	Yes
Voltage/hertz/phase	115/60/1	230/208/60/1	230/208/60/1	230/208/60/1	230/208/60/1
COOLING CAPACITY					
BTUH—AHAM cooling	8,300	10,000/9,800	12,000/11,700	14,000/13,600	12,000/11,700
Amps—AHAM	7.8	4.6/5.0	5.5/5.9	6.9/7.5	5.5/5.9
Watts	840	1,020/1,000	1,240/1,210	1,480/1,410	1,240/1,210
EER	9.6	9.6/9.6	9.5/9.5	9.3/9.5	9.5/9.5
CEER	9.6	9.6/9.6	9.5/9.5	9.3/9.5	9.5/9.5
Dehumidification (pints/hr.)	1.9	2.7/2.7	3.4/3.4	3.8/3.8	3.8/3.8
BTU heating	4,200	10,600/8,600	10,600/8,600	10,600/8,600	10,600/8,600
Heating Amps	11.8	15/13.5	15/13.5	15/13.5	15/13.5
Heating Watts	1,320	3,450/2,821	3,450/2,821	3,450/2,821	3,450/2,821
FEATURES					
WiFi	Yes	Yes	Yes	Yes	Yes
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A
Electronic control	Yes	Yes	Yes	Yes	Yes
Remote control	Yes	Yes	Yes	Yes	Yes
24VAC wall thermostat capable (RAK164D2, RAK164P2)—8 Pin Quick Disconnect	Yes	Yes	Yes	Yes	Yes
Line cord plug/configuration	Parallel NEMA 5-15P Right angle LCDI	Perpendicular NEMA 6-20P Right angle LCDI	Perpendicular NEMA 6-20P Right angle LCDI	Perpendicular NEMA 6-20P Right angle LCDI	Perpendicular NEMA 6-20P Right angle LCDI
Fan speeds	3	3	3	3	3
Centered rear condenser coil —compatible with RAG13/ RAG13A/RAG14E grille	Yes	Yes	Yes	Yes	Yes
WEIGHTS & DIMENSIONS					
Chassis width (in.)	26-1/16	26-1/16	26-1/16	26-1/16	26-1/16
Chassis height (in.)	15-21/32	15-21/32	15-21/32	15-21/32	15-21/32
Chassis depth (in.)	21-1/16	21-1/16	21-1/16	21-1/16	21-1/16
Approx. net weight (lbs.)	66	69	79	79	79
Approx. shipping weight (lbs.)	76	80	89	89	89

All 230/208V cooling units with electric heat models are corrosion treated. Design subject to change without notice. Specifications subject to change. For complete specifications visit geappliances.com.

BUILT-IN “J” SERIES—WIFI COOL ONLY

	GE						
	STANDARD INSTALLATION						
	AJCQ06LWH	AJCQ08AWH	AJCQ10AWH	AJCQ12AWH	AJCQ10DWH	AJCQ12DWH	AJCQ14DWH
ENERGY STAR certified	Yes	Yes	Yes	Yes	Yes	Yes	Yes
ADA compliant	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Voltage/hertz/phase	115/60/1	115/60/1	115/60/1	115/60/1	230/208/60/1	230/208/60/1	230/208/60/1
COOLING CAPACITY							
BTU—AHAM cooling	6,300	8,400	10,000	12,000	10,150/9,900	12,100/11,900	14,000/13,500
Amps—AHAM	5.0	7.0	8.3	10.2	4.5/4.8	5.2/5.6	6.9/7.5
Watts	560	780	930	1,130	950/920	1,140/1,120	1,490/1,420
EER	11.0	10.6	10.6	10.5	10.6/10.6	10.5/10.5	9.3/9.5
CEER	11.0	10.6	10.6	10.5	10.6/10.6	10.5/10.5	9.3/9.5
Dehumidification (pints/hr.)	1.3	1.9	2.7	3.4	2.7/2.7	3.4/3.4	3.8/3.8
FEATURES							
WiFi	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
Circuit size (Amps)	15	15	15	15	15	15	15
Line cord plug/configuration	Parallel/NEMA 5-15P Right Angle LCDI	Parallel/NEMA 5-15P Right Angle LCDI	Parallel/NEMA 5-15P Right Angle LCDI	Parallel/NEMA 5-15P Right Angle LCDI	Tandem/NEMA 6-15P Right Angle LCDI	Tandem/NEMA 6-15P Right Angle LCDI	Tandem/NEMA 6-15P Right Angle LCDI
Electronic control	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Filter reminder function	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Filter type	Rigid, tilt-out/washable	Rigid, tilt-out/washable	Rigid, tilt-out/washable	Rigid, tilt-out/washable	Rigid, tilt-out/washable	Rigid, tilt-out/washable	Rigid, tilt-out/washable
Remote	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Fan speeds	3	3	3	3	3	3	3
WEIGHTS & DIMENSIONS							
Chassis WxHxD (in.)	26-1/16 x 15-21/32 x 21-1/16						
Approx. net weight (lbs.)	62	64	67	73	67	74	74
Approx. shipping weight (lbs.)	72	73	77	83	77	84	84

	GE			
	HIGH-MOUNT INSTALLATION			
	AJCM08AWH	AJCM10AWH	AJCM10DWH	AJCM12DWH
ENERGY STAR certified	Yes	Yes	Yes	Yes
ADA/UFAS compliant	Yes	Yes	Yes	Yes
Voltage/hertz/phase	115/60/1	115/60/1	230/208/60/1	230/208/60/1
COOLING CAPACITY				
BTU—AHAM cooling	8,400	10,000	10,150/9,900	12,100/11,900
Amps—AHAM	7	8.3	4.5/4.8	5.2/5.6
Watts	790	930	950/920	1,140/1,120
EER	10.6	10.6	10.6/10.6	10.5/10.5
CEER	10.6	10.6	10.6/10.6	10.5/10.5
Dehumidification (pints/hr.)	1.9	2.7	2.7/2.7	3.4/3.4
FEATURES				
WiFi	Yes	Yes	Yes	Yes
Refrigerant type	R-410A	R-410A	R-410A	R-410A
Circuit size (Amps)	15	15	15	15
Line cord plug/configuration	Parallel/NEMA 5-15P Right Angle LCDI	Parallel/NEMA 5-15P Right Angle LCDI	Tandem/NEMA 6-15P Right Angle LCDI	Tandem/NEMA 6-15P Right Angle LCDI
Electronic control	Yes	Yes	Yes	Yes
Filter reminder function	Yes	Yes	Yes	Yes
Filter type	Rigid, tilt-out/washable	Rigid, tilt-out/washable	Rigid, tilt-out/washable	Rigid, tilt-out/washable
Remote	Yes	Yes	Yes	Yes
Fan speeds	3	3	3	3
WEIGHTS & DIMENSIONS				
Chassis WxHxD (in.)	26-1/16 x 15-21/32 x 21-1/16			
Approx. net weight (lbs.)	64	67	67	74
Approx. shipping weight (lbs.)	73	77	77	84

BUILT-IN “J” SERIES—WIFI HEAT PUMP HEAT/COOL

	GE	
	HEAT PUMP	
	AJHQ08AWH	AJHQ12DWH
ADA compliant	Yes	Yes
Voltage/hertz/phase	115/60/1	230-208/60/1
COOLING CAPACITY		
BTUH cooling	8,200	11,500/11,100
Amps	7.3	5.2/5.5
Watts	810	1,170/1,130
EER	9.8	9.6/9.6
CEER	9.8	9.6/9.6
Dehumidification (pints/hr.)	1.9	3.4/3.4
FEATURES		
WiFi	Yes	Yes
Refrigerant type	R-410A	R-410A
Reverse cycle BTU heating	6,650	8,500/8,300
Reverse cycle Amps	6.0	4.6/5.0
Reverse cycle Watts	650	1,030/1,010
COP*	3.0	2.4
Resistance heat BTU	4,200	10,600/8,600
Resistance heat Amps (max)	11.8	15.0/13.5
Resistance heat Watts	1,320	3,450/2,821
24VAC wall thermostat capable requires 8 pin thermostat converter (sold separately)	Yes	Yes
Line cord plug/configuration	Parallel/Right Angle LCDI	Perpendicular/Right Angle LCDI
Fan speeds	3	3
WEIGHTS & DIMENSIONS		
Chassis WxHxD (in.)	26-1/16 x 15-21/32 x 21-1/16	
Approx. net weight (lbs.)	72	82
Approx. shipping weight (lbs.)	83	92




\*Coefficient of Performance

See page 296 for warranty information.




BUILT-IN ROOM AIR CONDITIONERS WALL OPENING
FOR RAB26A/RAB46B QUICK SNAP CASES

A finished opening of 26-1/8" x 15-3/4", clear of intrusions, is required. Keep clearance of 4" from side walls. Brick veneer or frame walls should have wood studding surrounding case to provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.



STANDARD WALL CASE

RAB26A—Color-matched white sleeve to current AJ product. 4-piece Quick Snap universal design. Aluminum grille (RAG13A) included. Uses RAD10 drain kit.
RAB46B—Beige-colored Quick Snap Flat Pack Wall Sleeve



RAK26TO—26" Sleeve Tenant Option

Used when the air conditioner is offered as a tenant option. Install when the wall sleeve is installed without a chassis to close off the interior from the outside elements. Includes indoor steel insulated panel, vinyl outdoor panel and hardware.




WALL OUTLETS

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum wiring may pose special problems —consult a qualified electrician.

Note: Some models may not be available in your area due to local legislation. Contact your local dealer.



ZONELINE® ULTIMATEV10™ VERTICAL AIR CONDITIONER

Table with 4 columns: GE AZ95 SERIES COOLING WITH ELECTRIC HEAT, AZ95E09DAC\*, AZ95E12DAC\*, AZ95E18DAC\*. Rows include Voltage, Features, Cooling BTUH, EER, Cooling power, Cooling current, Sensible heat ratio, Dehumidification, Refrigerant, Indoor CFM, Case Dimensions, Width, Depth, Height, Net weight, Approx. shipping weight, Clearances for front install, and Clearances for side install.

Table with 7 columns: GE AZ95 SERIES HEAT PUMP WITH BACKUP ELECTRIC HEAT, AZ95H09DAC\*, AZ95H12DAC\*, AZ95H18DAC\*, AZ95H09EAC, AZ95H12EAC, AZ95H18EAC. Rows include Voltage, Features, Heating BTU, COP, Heating power, Heating current, Case Dimensions, Width, Depth, Height, Net weight, Approx. shipping weight, Clearances for front install, and Clearances for side install.

\*230V Performance Data Listed
\*\*18K Dehum Rate and SHR data acquired using medium fan speed. All other models show low fan speed data.

ZONELINE® PACKAGED TERMINAL AIR CONDITIONER SPECIFICATIONS

AZ45 SERIES TYPICAL COOLING WITH ELECTRIC HEAT

Table with 5 columns: 230/208V Models, AZ45E07DAB, AZ45E09DAB, AZ45E12DAB, AZ45E15DAB. Rows include Capacity, Cooling BTUH, EER, Dehumidification, Features, Refrigerant type, CFM, Vent CFM, Power/Ratings, Power factor, Sensible heat ratio, Cooling Watts, Cooling Amperes, Amperes, L.R., and Weight (Net/Ship).

AZ45 SERIES COOLING WITH ELECTRIC HEAT (Premium Guard Corrosion Protection)

Table with 9 columns: 230/208V Models, AZ45E07DAC, AZ45E09DAC, AZ45E12DAC, AZ45E15DAC, 265V Models, AZ45E07EAC, AZ45E09EAC, AZ45E12EAC, AZ45E15EAC. Rows include Capacity, Cooling BTUH, EER, Dehumidification, Features, Refrigerant type, CFM, Vent CFM, Power/Ratings, Power factor, Sensible heat ratio, Cooling Watts, Cooling Amperes, Amperes, L.R., and Weight (Net/Ship).

AZ45 SERIES COOLING WITH ELECTRIC HEAT (Dry Air 25)

Table with 6 columns: 230/208V Models, AZ45E07DAP, AZ45E09DAP, AZ45E12DAP, 265V Models, AZ45E09EAP, AZ45E12EAP. Rows include Capacity, Cooling BTUH, EER, Dehumidification, Features, Refrigerant type, CFM, Vent CFM, Power/Ratings, Power factor, Sensible heat ratio, Cooling Watts, Cooling Amperes, Heating Amperes, and Weight (Net/Ship).



Specifications subject to change.
See page 296 for warranty information.



ZONELINE® PACKAGED TERMINAL AIR CONDITIONER SPECIFICATIONS

AZ65 SERIES HEAT PUMP WITH BACKUP ELECTRIC HEAT

	230/208V Models			
	AZ65H07DAB	AZ65H09DAB	AZ65H12DAB	AZ65H15DAB
CAPACITY				
Cooling BTUH	7,100/6,900	9,700/9,600	11,900/11,800	14,400/14,200
EER (BTU/Watt)	13.0/13.0	12.2/12.2	11.6/11.8	10.5/10.5
Dehumidification Pts/Hr	1.7	2.6	3.7	4.8
FEATURES				
Refrigerant type	R-410A	R-410A	R-410A	R-410A
CFM, indoor fan high	360	420	410	400
CFM, indoor fan low	205	300	300	290
Vent CFM (full open*)	38	40	45	44
POWER/RATINGS				
Power factor	96%	98%	98%	97%
Sensible heat ratio	79%	68%	62%	60%
Cooling Watts	545/530	795/785	1,020/995	1,365/1,340
Cooling Amperes, F.L.	2.5/2.7	3.6/3.8	4.6/4.9	6.2/6.6
Amperes, L.R.	13.5	21.0	29.5	31.5
Reverse cycle heat BTUH	6,200/6,100	8,100/8,000	10,400/10,300	13,500/13,300
COP**	4.0/4.0	3.7/3.7	3.6/3.6	3.2/3.2
Heating Watts	450/440	645/630	845/835	1,195/1,160
Heating Amperes	2.1/2.2	3.0/3.2	3.8/4.0	5.4/5.7
WEIGHT (NET/SHIP)	98/108	104/114	104/114	107/117

\*With RAKVENTI Kit \*\*Coefficient of Performance



AZ65 (TYPICAL) SERIES HEAT PUMP WITH BACKUP ELECTRIC HEAT (Premium Guard Corrosion Protection)

	230/208V Models				265V Models			
	AZ65H07DAC	AZ65H09DAC	AZ65H12DAC	AZ65H15DAC	AZ65H07EAC	AZ65H09EAC	AZ65H12EAC	AZ65H15EAC
CAPACITY								
Cooling BTUH	7,100/7,000	9,600/9,500	11,800/11,600	14,400/14,200	7,000	9,500	11,500	14,000
EER (BTU/Watt)	13.0/13.0	12.2/12.2	11.8/11.8	10.4/10.4	12.8	11.7	11.2	10.0
Dehumidification (pints/hr.)	1.6	2.6	3.7	4.8	1.5	2.5	3.7	4.8
FEATURES								
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
CFM, indoor fan high	360	420	410	400	360	420	410	400
CFM, indoor fan low	205	300	300	290	205	300	300	290
Vent CFM (full open*)	38	40	45	44	38	40	45	44
POWER/RATINGS								
Power factor	96%	98%	98%	97%	95%	94%	97%	97%
Sensible heat ratio	73%	68%	62%	60%	77%	68%	62%	60%
Cooling Watts	545/535	795/785	995/975	1,365/1,365	545	810	1,025	1,390
Cooling Amperes, F.L.	2.5/2.7	3.6/3.9	4.5/4.9	6.2/6.7	2.2	3.3	4.0	5.5
Amperes, L.R.	13.5	21.0	29.5	31.5	11.7	16.5	23.5	29.0
Reverse cycle heat BTUH	6,200/6,100	8,100/8,000	10,300/10,200	13,200/13,000	6,200	8,100	10,000	13,200
COP**	4.0/4.0	3.7/3.7	3.6/3.6	3.2/3.2	3.9	3.6	3.5	3.1
Heating Watts	450/445	645/630	835/815	1,205/1,180	460	655	835	1,225
Heating Amperes	2.1/2.2	2.9/3.1	3.8/4.0	5.5/5.8	1.9	2.8	3.5	4.9
WEIGHT (NET/SHIP)	98/108	106/116	104/114	108/118	98/108	104/114	104/114	109/119

\*With RAKVENTI Kit \*\*Coefficient of Performance

AZ65 SERIES HEAT PUMP WITH BACKUP ELECTRIC HEAT (Internal Condensate Removal)

	230/208V Models				265V Models			
	AZ65H07DAD	AZ65H09DAD	AZ65H12DAD	AZ65H15DAD	AZ65H07EAD	AZ65H09EAD	AZ65H12EAD	AZ65H15EAD
CAPACITY								
Cooling BTUH	7,000/6,900	9,600/9,500	11,800/11,600	14,100/14,100	7,000	9,500	11,600	14,200
EER (BTU/Watt)	13.0/13.0	12.0/12.0	11.8/11.8	10.3/10.3	12.8	11.7	11.4	10.3
Dehumidification (pints/hr.)	1.6	2.6	3.7	4.8	1.5	2.5	3.7	4.8
FEATURES								
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
CFM, indoor fan high	360	420	410	400	360	420	410	400
CFM, indoor fan low	205	300	300	290	205	300	300	290
Vent CFM (full open*)	38.0	40.0	45.0	44.0	38	40	45	44
POWER/RATINGS								
Power factor	96%	98%	98%	97%	95%	94%	97%	97%
Sensible heat ratio	73%	68%	62%	60%	77%	68%	62%	60%
Cooling Watts	535/530	800/790	1,020/1,005	1,385/1,360	545	810	1,015	1,375
Cooling Amperes, F.L.	2.5/2.7	3.6/3.9	4.5/4.9	6.1/6.6	2.2	3.3	4.1	5.5
Amperes, L.R.	13.5	21.0	29.5	31.5	11.7	16.5	23.5	29.0
Reverse cycle heat BTUH	6,200/6,000	8,200/8,000	10,400/10,200	13,200/13,000	6,200	8,100	10,000	13,300
COP**	4.0/4.0	3.6/3.6	3.5/3.5	3.2/3.2	3.9	3.5	3.4	3.2
Heating Watts	450/435	665/650	870/850	1,235/1,225	460	670	850	1,210
Heating Amperes	2.1/2.2	3.0/3.2	3.8/4.0	5.3/5.6	1.9	2.8	3.5	4.9
WEIGHT (NET/SHIP)	100/110	108/118	106/116	110/120	100/110	106/116	106/116	111/121

\*With RAKVENTI Kit \*\*Coefficient of Performance

ZONELINE PACKAGED TERMINAL AIR CONDITIONER SPECIFICATIONS

AZ45 SERIES COOLING WITH ELECTRIC HEAT (Makeup Air)

	230/208V Models	
	AZ45E09DBM	AZ45E12DBM
CAPACITY		
Cooling BTUH	9,100/9,100	11,700/11,500
EER (BTU/Watt)	11.5/11.5	11.6/11.6
Dehumidification Pts/Hr	2.4	3.3
FEATURES		
Refrigerant type	R-410A	R-410A
CFM, indoor fan high	409	449
CFM, indoor fan low	280	270
Vent CFM (full open*)	35	35
POWER/RATINGS		
Power factor	98%	98%
Sensible heat ratio @ 230 Volts	75%	66%
Cooling Watts	790/790	1,005/985
Total Cooling Amperes	5.1/5.2	4.5/4.9
Amperes, L.R.	21.0	29.5
WEIGHT (NET/SHIP)	122/132	123/133

AZ65 SERIES HEAT PUMP WITH BACKUP ELECTRIC HEAT (Makeup Air)

	230/208V Models				265V Models		
	AZ65H07DBM	AZ65H09DBM	AZ65H12DBM	AZ65H15DBM	AZ65H07EBM	AZ65H09EBM	AZ65H12EBM
CAPACITY							
Cooling BTUH	7,000/7,000	9,200/9,100	11,500/11,400	14,000/13,800	6,900	9,200	11,600
EER (BTU/Watt)	12.5/12.5	11.3/11.3	11.2/11.2	10.1/10.1	12.5	11.5	11.3
Dehumidification Pts/Hr	0.9	1.9	2.9	4.3	0.7	2.0	2.8
FEATURES							
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
CFM, indoor fan high	409	409	449	400	409	409	449
CFM, indoor fan low	250	300	300	290	250	300	300
Vent CFM (full open*)	25-50	25-50	25-50	25-50	25-50	25-50	25-50
POWER/RATINGS							
Power factor	96%	97%	97%	97%	93%	93%	96%
Sensible heat ratio	89%	80%	69%		88%	78%	69%
Cooling Watts	560/560	810/805	1,025/1,015	1,370/1,350	550	800	1,025
Total Cooling Amperes	3.7/3.9	4.9/5.2	5.8/6.2	6.2/6.6	3.2	4.2	4.0
Amperes, L.R.	13.5	21	29.5	31.5	11.7	16.5	23.5
Reverse cycle heat BTUH	6,200/6,100	8,000/7,900	10,200/10,000	13,200/13,000	6,000	8,100	10,000
COP**	4.0/4.0	3.3/3.3	3.5/3.5	3.2/3.2	3.9	3.6	3.4
Heating Watts	450/440	705/695	850/835	1,200/1,180	450	655	860
Total Heating Amperes	3.3/3.4	4.7/4.8	5.0/5.2	5.4/5.7	2.9	3.8	3.5
WEIGHT (NET/SHIP)	117/127	123/133	123/133	126/136	117/127	123/133	123/133

\*\*Coefficient of Performance

ZONELINE SPECIFICATIONS  
POWER CONNECTION KITS AND HEATER WATTAGE

Power connection kits are required on all Zoneline chassis.  
(See chart on page 406.)

The correct kit for the installation is determined by the voltage and amperage of the electrical circuit and the means of connecting the unit to the building wiring. If the unit is to be plugged in to a receptacle, a line cord kit would be used; if the unit is to be permanently connected, a permanent connection kit would be used. Cord set units of 265 volts must be installed in compliance with National Electrical Code®.

POWER CONNECTION KITS

Required on all models. See specification sheet for heater KW and branch circuit ampacity.

LINE CORD CONNECTION KITS



**230/208 Volt Line Cord Connection Kits** RAK315P, RAK320P, RAK330P

**265 Volt Permanent Connection Kits** RAK515P, RAK520P, RAK530P.  
*Short power cord without LCDI for sub-base use only.*

DIRECT CONNECTION KITS



**230/208 Volt Direct Connection Kits** RAK315D, RAK320D, RAK330D\*

**265 Volt Direct Connection Kits** RAK515D, RAK520D, RAK530D

\*Requires the purchase and use of the RAK4002D Junction Box

RECEPTACLES/SUB-BASES

<b>TANDEM</b> 230/208V 15 amp NEMA6-15R	<b>265V 15 AMP</b> NEMA7-15R; Receptacle used on 265V sub-base	<b>PERPENDICULAR</b> 230/208V 20 amp NEMA6-20R	<b>265V 20 AMP</b> NEMA7-20R; Receptacle used on 265V sub-base	<b>LARGE TANDEM</b> 230/208V 30 amp NEMA6-30R	<b>265V 30 AMP</b> NEMA7-30R; Receptacle used on 265V sub-base
<b>RAK204D15C*</b> 15 amp sub-base 230/208 volt Includes power cord: RAK315SP	<b>RAK204E15C</b> 15 amp sub-base 265 volt Includes short power cord: RAK515P	<b>RAK204D20C*</b> 20 amp sub-base 230/208 volt Includes power cord: RAK320SP	<b>RAK204E20C</b> 20 amp sub-base 265 volt Includes short power cord: RAK520P	<b>RAK204D30C*</b> 30 amp sub-base 230/208 volt Includes power cord: RAK330SP	<b>RAK204E30C</b> 30 amp sub-base 265 volt Includes short power cord: RAK530P

\*Requires the purchase and use of the RAK4002D Junction Box

ZONELINE® INSTALLATION

Simple three-step installation

Zoneline units are designed for easy installation, off or flush with the floor. When the sleeve is installed, the chassis simply slides into place.

Compatibility with existing Zoneline wall sleeves and rear grilles simplifies retrofit installations. A new chassis simply slides into the already installed wall case; the existing rear grille may be used as is, or with a minor modification for greater operating efficiency.

The exclusive Quick Connect power supply kit with all models makes it easy to connect the new unit to power sources already in place.

- 1. **Frame the opening.** The RAB78B SMC wall sleeve requires an opening of 16-1/4" high x 42-14" wide, same as the RAB81 or RAB81B. Position the sleeve, secure it to the studs and then caulk. Complete instructions are furnished with each unit.
- 2. **Connect the electrical supply.** Each Zoneline unit requires a 230/208V or 265V power supply. It is strongly recommended that electrical connections be made by a qualified electrician. All wiring, including installation of the receptacle, must be in accordance with local codes.
- 3. **Slide-in chassis.** With the wall sleeve, electrical receptacle and exterior grille in place, the separate chassis simply slides into position. Install the roomside cabinet, and plug into the electrical receptacle. You are now ready for many years of quiet comfort.

ELECTRICAL WIRING

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations.

**Note:** Aluminum wiring may pose special problems—consult a qualified electrician.

Cooling sizes

All units come in four nominal cooling sizes: 7,000, 9,000, 12,000 and 15,000 BTUH.

Resistance heat

Resistance heat or backup heat output is determined by power connection kits (15A, 20A or 30A).

Grille options

RAG60 (Stamped Aluminum)  
Molded Exterior Architectural Louvers:  
RAG61 (Beige), RAG62 (Maple) and RAG63 (Dark Brown)  
RAG67 Extruded Aluminum Architectural Grille

Ducted applications

AZ45 and AZ65 Series can be used with ductwork to heat or cool more than one room. RAK6053 Duct Adapter is applied to top of case over air discharge. RAK601B Duct Extension is applied to right or left of adapter. Locally fabricated ductwork may be added to extend to maximum recommended distance of 15 feet. Remote thermostat recommended with ducted straight line applications (no turns or bends).

ZONELINE SPECIFICATIONS

HEATER WATTAGE

	230/208-VOLT	LINE-CORD CONNECTED (P) AND DIRECT-CONNECTED UNITS (D)				
BTUH SIZE		7,000/9,000		12,000/15,000		
Power connection kit	RAK315P & RAK315D	RAK320P & RAK320D	RAK330P & RAK330D	RAK315P & RAK315D	RAK320P & RAK320D	RAK330P & RAK330D
Total Watts	2,410/1,990	3,420/2,830	4,830/3,990*	2,430/2,020	3,450/2,860	4,860/4,020*
Heater Watts	2,400/1,960	3,400/2,780	4,800/3,930*	2,400/1,960	3,400/2,780	4,800/3,930*
Heater BTUh	8,100/6,600	11,600/9,400	16,300/13,400*	8,100/6,600	11,600/9,400	16,300/13,400*
Total Amps	10.5/9.6	14.9/13.6	21.0/19.2	10.6/9.7	15.1/13.8	21.2/19.3
Min. circuit (MCA)	15	20	25	15	20	25
Recommended protective device (MOCP)	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	30 amp time-delay fuse or breaker	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	30 amp time-delay fuse or breaker

	265-VOLT	PERMANENT (CORD SET) AND DIRECT-CONNECTED UNITS (D)				
BTUH SIZE		7,000/9,000		12,000/15,000		
Power connection kit	RAK515P & RAK515D	RAK520P & RAK520D	RAK530P & RAK530D	RAK515P & RAK515D	RAK520P & RAK520D	RAK530P & RAK530D
Total Watts	2,440	3,450	4,850*	2,460	3,470	4,870*
Heater Watts	2,400	3,400	4,800*	2,400	3,400	4,800*
Heater BTUh	8,100	11,600	16,300*	8,100	11,600	16,300*
Total Amps	9.1	12.9	18.1	9.3	13.1	18.4
Min. circuit (MCA)	15	20	25	15	20	25
Recommended protective device (MOCP)	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	25 amp time-delay fuse or breaker	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	25 amp time-delay fuse or breaker


Each line cord kit has an integral Leakage Current Detection and Interruption (LCDI) device as required by National Electrical Code (NEC) and Underwriters Laboratories (UL) for units manufactured after August 1, 2004. Wall case and exterior grille are also required for new construction. \*30 amp heater wattage will be reduced in low fan operation.

Electrical connection

230/208V units may be plugged into a receptacle. 265V units and special-application 230/208V units require direct connection. See Architects and Engineers Design Data Manual for electrical connection information, including use of sub-base for direct-connected units. Installation must comply with local electrical codes and regulations.

For the most current updates to features, specifications and installations or applications, visit our website at [www.zoneline.com](http://www.zoneline.com).

WALL SLEEVE DIMENSIONS



RAB78B wall sleeve

Molded SMC fiberglass-reinforced polyester compound. A-42", B-14", C-16"

RAB81 and RAB81B wall sleeve

Heavy-gauge galvanized steel, with insulation. A-42", B-13-3/4", C-16"

Wall opening dimensions


Add 1/4" to A and C dimensions for all cut-out sizes.

RAB81—16-1/4" min. H x 42-1/4" min. W


RAB81B—16-1/4" min. H x 42-1/4" min. W

RAB78B—16-1/4" min. H x 42-1/4" min. W

Extended sleeves also available.

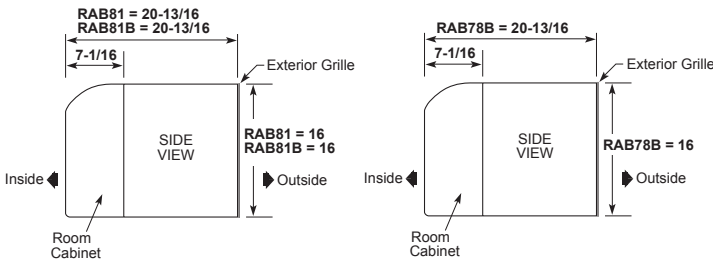

MAXIMUM CORD REACH (IN INCHES)



READING NOMENCLATURES

FRENCH-DOOR REFRIGERATOR

P	F	E	2	8	P	S	K	S	S
<b>Brand</b> G=GE P=GE Profile™	<b>Energy</b> E=ENERGY STAR® S=Standard D=Door in door		<b>Capacity</b>		<b>Feature pack</b>	<b>Model year</b>		<b>Color</b> BB=Black CC=Bisque DS=Black Slate ES=Slate FS=Fingerprint Resistant Stainless SA=Silver SS=Stainless TS=Black Stainless WW=White	
<b>Configuration/Depth</b> F=Standard depth N=Standard depth, non-dispenser V=Standard-depth, 4 door W=Counter depth, non-dispenser X=Counter-depth, 4 door Y=Counter depth					<b>Finish</b> G=High-gloss M=Slate S=Stainless E=Black Slate B=Black Stainless Y=Fingerprint Resistant Stainless				

BOTTOM-FREEZER REFRIGERATOR

G	D	E	2	5	E	S	K	S	S
<b>Brand</b> G=GE	<b>Energy</b> E=ENERGY STAR S=Standard	<b>Capacity</b> Cubic feet	<b>Feature pack</b>			<b>Finish</b> G=High-gloss M=Slate S=Stainless	<b>Model year</b>	<b>Color</b> BB=Black CC=Bisque DS=Black Slate ES=Slate FS=Fingerprint Resistant Stainless SA=Silver SS=Stainless TS=Black Stainless WW=White	
<b>Configuration/Depth</b> B=Bottom-freezer door, no icemaker D=Bottom-freezer drawer, with icemaker									

SIDE-BY-SIDE REFRIGERATOR

G	S	E	2	5	H	S	H	S	S
<b>Brand</b> G=GE P=GE Profile	<b>Energy</b> E=ENERGY STAR S=Standard		<b>Capacity</b> Cubic feet		<b>Feature pack</b>		<b>Model year</b>	<b>Color</b> BB=Black CC=Bisque DS=Black Slate ES=Slate FS=Fingerprint Resistant Stainless SA=Silver SS=Stainless TS=Black Stainless WW=White	
<b>Configuration/Depth</b> S=Standard depth Z=Counter depth					<b>Finish</b> G=High-gloss M=Slate S=Stainless B=Black Stainless Y=Fingerprint Resistant Stainless				

TOP-FREEZER REFRIGERATOR

G	T	E	1	5	C	T	H	R	W	W
<b>Brand</b> G=GE	<b>Energy</b> E=ENERGY STAR S=standard		<b>Capacity</b>  cubic feet			<b>Model year</b>		<b>Color</b> BB=Black CC=Bisque DS=Black Slate ES=Slate FS=Fingerprint Resistant Stainless SA=Silver SS=Stainless TS=Black Stainless WW=White		
<b>Configuration</b> T=Top-freezer with handle, no icemaker I=Top-freezer with handle and icemaker P=Top-freezer with pocket handle, no icemaker						<b>Finish</b> C=Silver Metallic G=High-gloss M=Slate S=Stainless T=Textured				
<b>Feature pack</b> C=Wire shelves, pocket handle, texture door D=Wire shelves, handle texture door G=Glass shelves, texture door H=Glass shelves, smooth door J=Premium door shelves, texture door K=Garage Ready, smooth door						<b>Door swing</b> R=Right L=Left				

COMPACT REFRIGERATOR, WINE & BEVERAGE (2014 AND BEYOND)

G	M	E	0	3	G	L	K	L	B
<b>Brand</b> G=GE P=GE Profile	<b>Energy</b> E=ENERGY STAR R=Recessed handle S=Full-size handle		<b>Capacity</b> Cubic feet		<b>Model year</b>				
<b>Type</b> C=Built-in capable D=Double door F=All refrigerator M=Manual defrost V=Wine & bev center W=Wine center					<b>Finish</b> G=GE Gloss L=CleanSteel™ M=Slate S=Stainless		<b>Color</b> WW=White on White BB=Black on Black LB=CleanSteel ext./ Black handle SS=Stainless ext./SS handle SB=Stainless ext./ Black handle ED=Slate appearance/ Dorian Gray handle		
<b>Shelving</b> A=Wire shelves B=Beverage shelves D=Dual zone wine shelves G=Glass shelves H=Wine shelves W=Deluxe wine shelves									

CHEST FREEZER

F	C	M	2	2	D	L	W	W
<b>GE freezer</b>	<b>Chest</b>	<b>Manual</b>	<b>Cubic feet</b>	<b>Series</b> C=Camouflage CC=Deluxe P=ENERGY STAR S=Standard		<b>Model year</b>	<b>Color</b> WW=White CD=Camouflage/ Dorian Grey	

UPRIGHT FREEZER

F	U	F	1	4	D	L	R	W	W
<b>GE freezer</b>	<b>Upright</b>		<b>Frost-free</b>	<b>Cubic feet</b>	<b>Series</b> D=Deluxe S=Standard	<b>Model year</b>	<b>Door swing</b> R=Right L=Left	<b>Color</b> WW=White	

ICE MAKER

U	N	C	1	5	N	J	I	I
<b>Configuration</b> U=Universal	<b>Ice</b> N=Nugget ice C=Clear ice	<b>Width (inches)</b> C=Panel-ready		<b>N=No shelf</b>		<b>Model year</b>	<b>Product color</b> II=Panel-ready	

WALL OVEN

P	T	S	7	0	0	0	B	N	T	S	
<b>Brand</b> P=GE Profile J=GE	<b>Series</b>		<b>Feature pack</b>		<b>Model year</b>		<b>Width</b> T=30" K=27"	<b>Cavity configuration</b> S=Single D=Double	<b>Door style</b> O=Drop down L=Left hand swing R=Right hand swing	<b>Base color</b> D=Color match S=Stainless B=Black Stainless E=Slate F=Black Slate	<b>Finish</b> SS=Stainless TS=Black Stainless ES=Slate DS=Black Slate BB=Black WW=White

WARMING DRAWER

P	T	W	9	0	0	0	S	N	S	S
Brand P=GE Profile	Configuration W=Warming drawer		Series	Base color S=Stainless		Model year	Product color SS=Stainless			
Width T=30" K=27"										

ADVANTIUM® (2008 and beyond)

P	S	B	9	2	0	1	S	F	S	S									
<b>Brand</b> P=GE Profile	<b>Configuration</b> A=Above-the-cooktop B=Built-in wall oven		<b>Voltage</b> 1=120 volt 2=240 volt	<b>Model/Door color</b> S=Stainless E=Slate B=Black Stainless		<b>Product color</b> SS=Stainless ES=Slate TS=Black Stainless													
<b>GE Speedcook technology</b>																			
<b>Series</b> Designates features—the higher the number, the more features.																			
<b>Model year</b>																			


MICROWAVE OVEN

P	V	M	9	2	1	5	S	K	S	S
<b>Brand</b> P=GE Profile J=GE	<b>Series</b>		<b>Installation</b> B=Built-in capability M=Mounts under cabinet/built-in capability L=Mountable under the cabinet S=Countertop only	<b>Feature pack</b> Designates features—the higher the number, the more features.	<b>Capacity</b> XX=cubic feet	<b>Model/Door color</b> D=Color-matched S=Stainless with Gray B=Black Stainless R=Stainless with Black E=Slate M=Silver F=Black Slate Y=Fingerprint Resistant Stainless	<b>Model year</b>	<b>Color</b> WW=White on White BB=Black on Black CC=Bisque on Bisque SS=Stainless ES=Slate TS=Black Stainless DS=Black Slate FS=Fingerprint Resistant Stainless		
<b>Type</b> E=Countertop V=Externally vented, over-the-range N=Non-vented, over-the-range W=Microwave wall oven										




READING NOMENCLATURES (continued)


COOKTOP

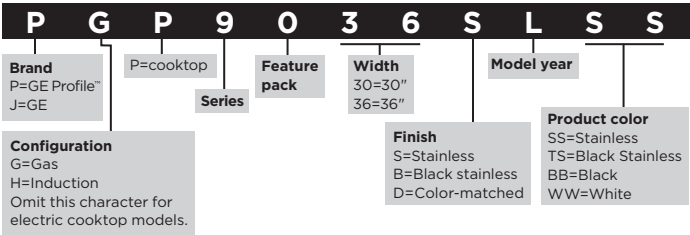


RANGE

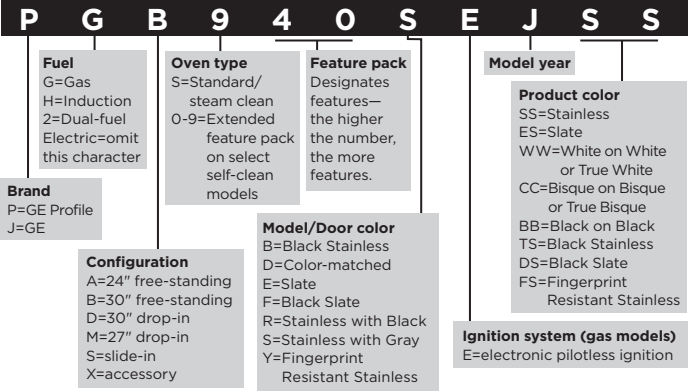


VENTILATION

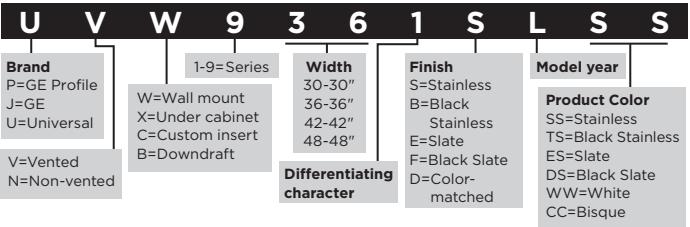

DISHWASHER—STAINLESS STEEL, HYBRID STAINLESS STEEL AND PLASTIC INTERIOR

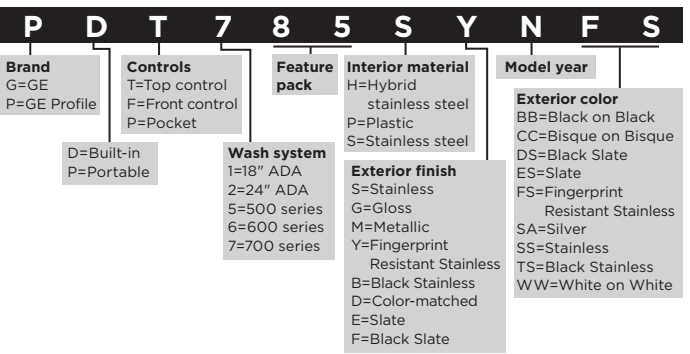


DISHWASHER—GE STANDARD TUB

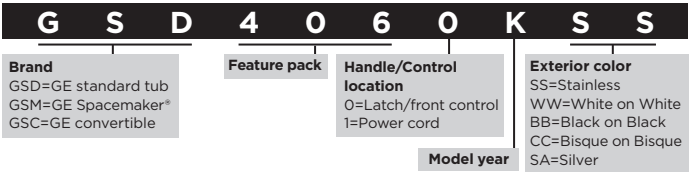


DISPOSER




WASHER

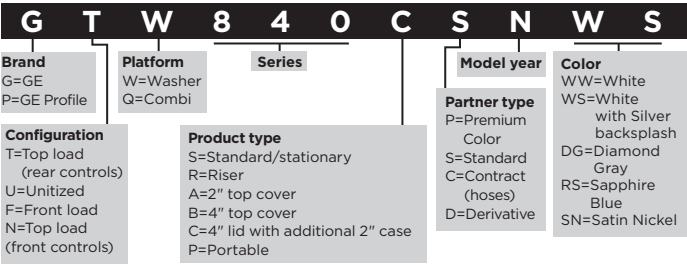


DRYER

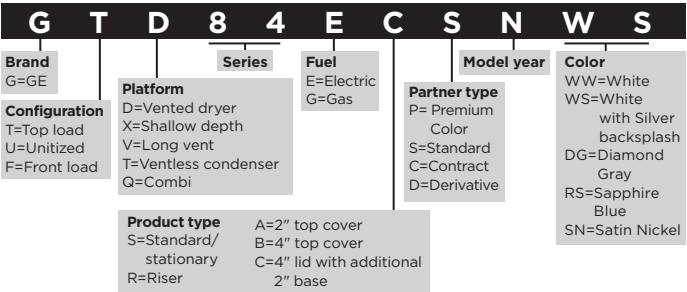


WATER SOFTENING SYSTEM

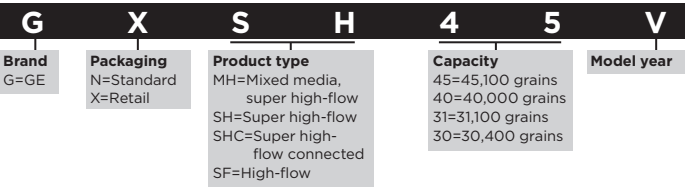


FLEXIBLE CAPACITY ELECTRONIC WATER HEATER

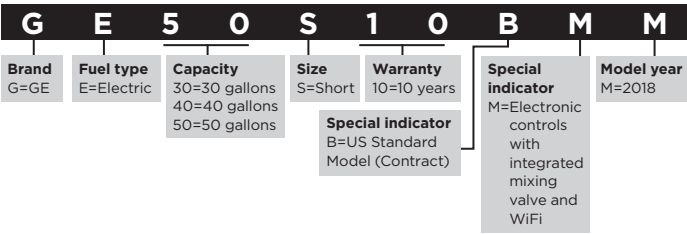


ELECTRIC TANKLESS WATER HEATER

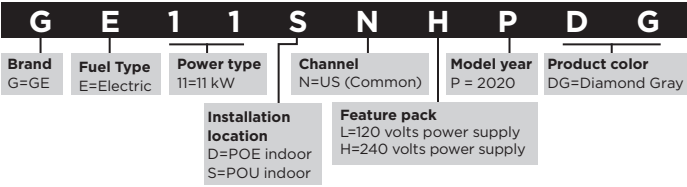


SOLAR WATER HEATER

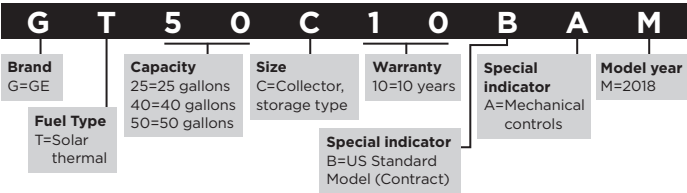


ELECTRONIC/ELECTRIC WATER HEATER

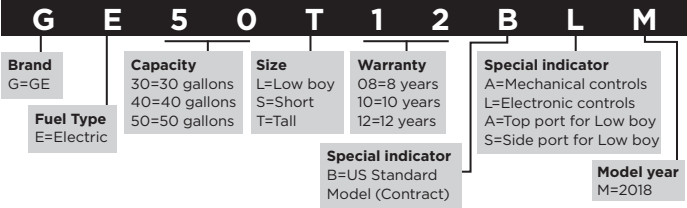


ELECTRIC POINT-OF-USE WATER HEATER

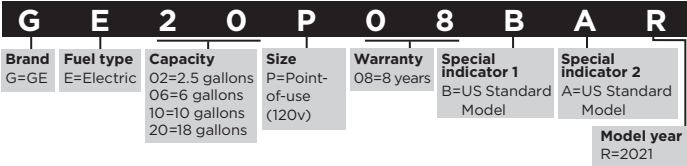


GAS WATER HEATER

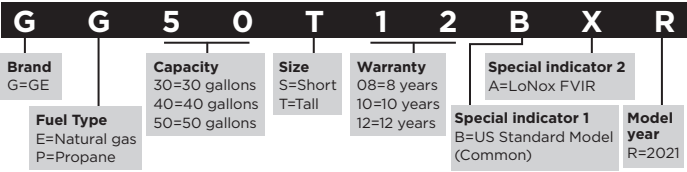


REVERSE OSMOSIS SYSTEM

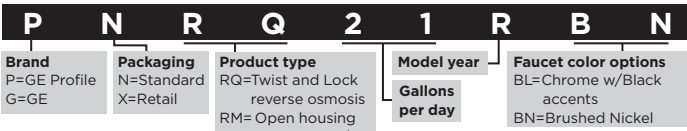


UNDER-THE-COUNTER FILTRATION SYSTEM

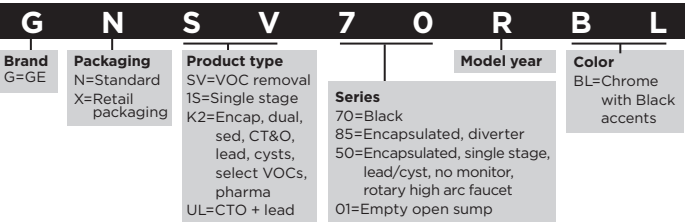


INLINE UNIT

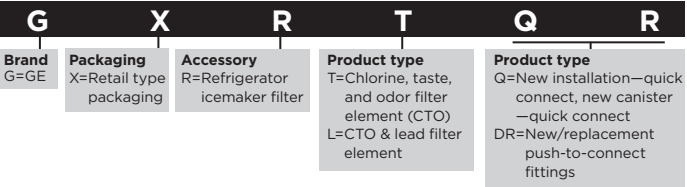


WHOLE HOME FILTRATION SYSTEM

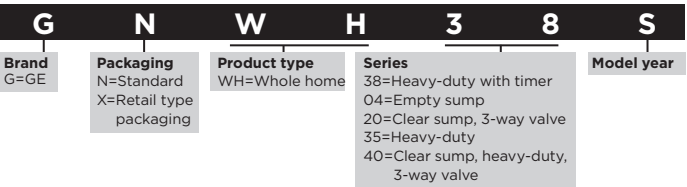


WINDOW AIR CONDITIONER

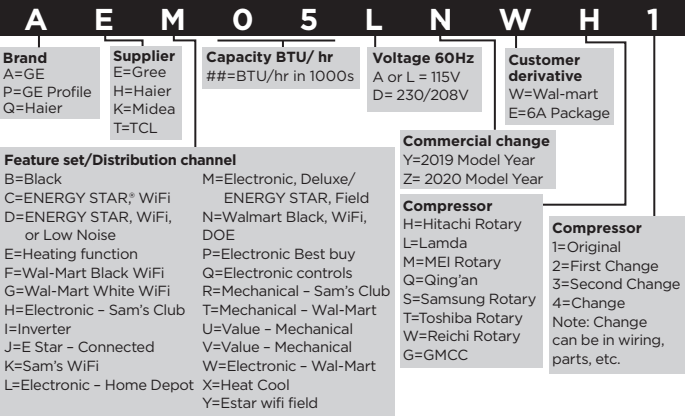


PORTABLE AIR CONDITIONER

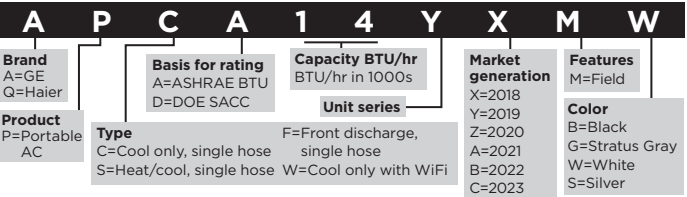


DEHUMIDIFIER

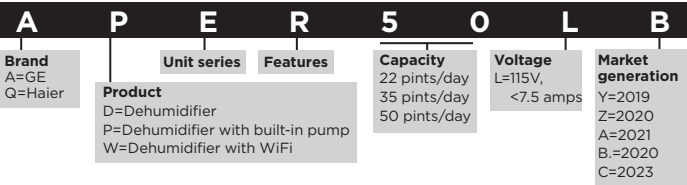


BUILT-IN/THROUGH-THE-WALL AIR CONDITIONER

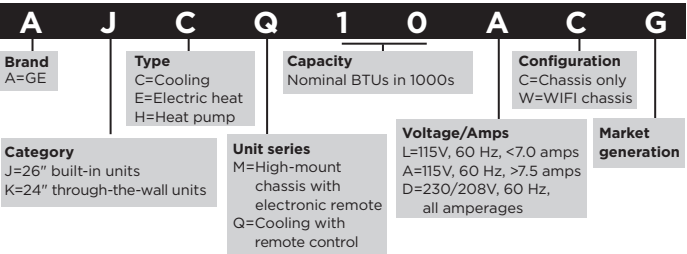

ZONELINE® CHASSIS

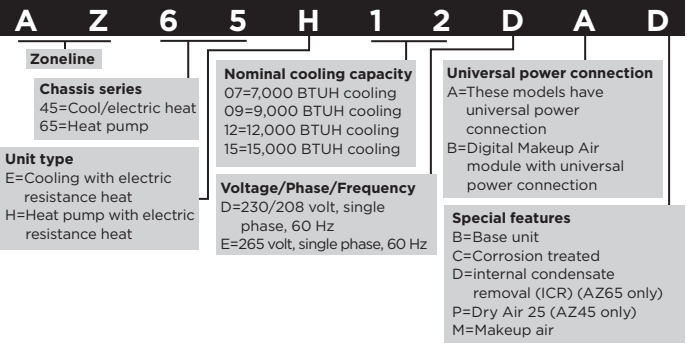

ZONELINE VERTICAL UNIT

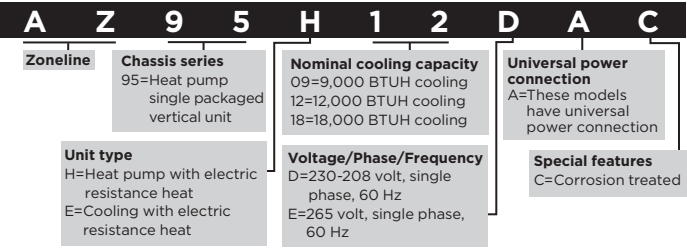

PARTS AND ACCESSORIES

REFRIGERATION	PART NUMBER
Keurig® K-Cup® Brewing System	WR02X30247
Keurig Brew Cup - 3 Pack	MyBrewCup3PK
8' Universal Braided Pex Water Line	PM08X10008
8' Universal Pex Water Line	WX08X10006
GE Ice maker Kit	IM6D
GE Optional Bottom Freezer Ice maker Kit	IM5D
Cerama Bryte® Stainless Steel Cleaner & Polisher	PM10X311
Cerama Bryte Stainless Steel Microfiber Cleaning Cloths	WX10X307
Cerama Bryte Stainless Steel Wipes	WX10X10004
Cerama Bryte Refrigerator Cleaner	WX10X10206
Ice Cube Tray	WR30X311
Appliance Brush Set	PM14X10056
COOKING	
30" Never-Scrub Heavy-Duty Roller Rack Accessory (Wall Oven)	UXWORXR30
27" Never-Scrub Heavy-Duty Roller Rack Accessory (Wall Oven)	UXWORXR27
Never-Scrub Roller Rack (881 for Electric Single Ovens) (862 for Electric Double Ovens)	WB48X20881 or WB48X20862
Never-Scrub Roller Rack (Dual Fuel Ranges)	WB48X20990
Never-Scrub Roller Rack (Gas Ranges)	WB48X21543
3 Self-Clean Oven Racks (Electric/Gas)	JXRACK3E/G
Universal Broiler Pan/Rack Set	WB48X10056
Roasting Rack for WB48X10056	WB48X5108
Cooktop Trim Kit	JXTR32B
GE Filler Trim Kit	JXTR32W
Slide-In Range Filler Kit	JXFILLR1BB/DD/SS
Optional Electrical Installation Accessory Kit	JXCK89
Flush Mount Kit	JXFLUSH1
Precision Cooking Probe with Bluetooth Dongle and Instruction Manual	JXSOUSV1
Probe Accessory	JXPROBE1
Universal 3-Wire 4' Electrical Range Cord Set	WX09X10006
Universal 4-Wire 4' Electrical Range Cord Set	WX09X10035
GE Electric Range Drip Bowls Satin Chrome (4 Pack)	GE68CC
GE Electric Range Drip Bowls Black Porcelain (4 pack)	GE68PCS
Center Grate (Gas Range)	WB31X27150
	same as JXGRATE1
Optional 30" Cast-Iron Griddle (Built-in/Cooktop)	WB31X29448
	same as JXGRIDL230
Optional 36" Cast-Iron Griddle (Built-in/Cooktop)	WB31X29396
	same as JXGRIDL236
Stainless Steel-Clad Aluminum Griddle	JXGRIDL1
Aluminum Griddle (Gas Range)	WB31X24738
Reversible Grill/Griddle (Gas Range)	WB31X24998
	same as JXGRILL1
Hestan Cue 11" Smart Pan	WB32X32079
Chantal® 9-Piece Cookware Set	WB02X30447
Chantal 8" Non-Stick Frypan	WB32X32287
Chantal 10" Non-Stick Frypan	WB32X32288
4' Universal Gas Range Connection with Auto Shutoff Kit	PM15X113
4' Universal Gas Range Installation Kit	PM15X103
Free-Standing 5-Burner Passover Kit	WB49XGR05F
Free-Standing 4-Burner Passover Kit	WB49XGR04F
Slide-In 5-Burner Passover Kit	WB49XGR05S
30" GE & HOTPOINT Free-Standing Range Sensi-Temp Coil Kit 3-6"+1-8"	WB30X32133
30" GE & HOTPOINT Free-Standing Range Sensi-Temp Coil Kit 2-6"+2-8"	WB30X32134
6" Sensi-Temp Coil	WB30X31058
8" Sensi-Temp Coil	WB30X31057
Citrushine™ Stainless Steel Spray	WX10X10009
Cerama Bryte Gas Grate Cleaning Kit	WX10X10021
Cerama Bryte Cleaning Pads	WX10X350
Cerama Bryte Stainless Steel Microfiber Cleaning Cloths	WX10X307
Cerama Bryte Stainless Steel Cleaner & Polisher	PM10X311
Cerama Bryte Stainless Steel Wipes	WX10X10004
Cerama Bryte Appliance Cleaner (use on matte finishes)	WX10X392
Cerama Bryte Granite Cleaner	WX10X310
Cerama Bryte Touchups Spray	WX10X391
Cerama Bryte Cooktop Cleaner	WX10X300
Cerama Bryte Complete Cooktop Kit	WX10X10020
Cerama Bryte Burnt-On Grease Remover	WX10X320
Cerama Bryte Cooktop Scraper & Pad	PM10X304

VENTILATION	
30" telescopic hood trim accessory	UXB630BPTS
36" telescopic hood trim accessory	UXB636BPTS
GE Optional Damper Accessory	JXDA22
Electric Range Accessory—Chimney Extension Kit	UXCH
GE Range Hood Cord Kit	JXHC1
Back Damper Accessory	UXBDA812
Automatic Make-up Air Damper for 6" duct	JXMUA6
Automatic Make-up Air Damper for 8" duct	JXMUA8
Range Hood 10-Ft. Duct Cover Kit	UXDC53/UXDC72**
Range Hood Charcoal Filter—2-Pack	WB02X24842 same as JXCF72
	WB02X24870 same as UXRC70
Range Hood Remote Control	WB02X24870 same as UXRC70
15" Cabinet Spacer for 30"/36" Hoods	JXS50SS, JXS56SS
Charcoal Filter	UXCF91
Grease Filters	WB02X10757
	WB02X11478
Range Hood Recirculation Kit	UXN70
10' Ceiling Stainless Duct Cover Kit	UX10DC8**
12' Ceiling Duct Cover Kit	UX12DC9**
14' Ceiling Duct Cover Kit	UX14DC9**
30" Hood Liner	UXHL30
36" Hood Liner	UXHL36
Charcoal Replacement Filter	JXCF30
Range Hood Remote Control	UXRC70/WB02X24870
Duct Reducer	UXDT86
ADVANTIUM®/MICROWAVE OVENS	
36" Over-the-Range Microwave Accessory Filler Kit	JX36B
Cerama Bryte Appliance Cleaner	WX10X392
Cerama Bryte Stainless Steel Cleaner & Polisher	PM10X311
Cerama Bryte Stainless Steel Wipes	WX10X10004
Cerama Bryte Stainless Steel Microfiber Cleaning Cloths	WX10X307
Advantium Wall Oven Storage Drawer	UXB903SNSS
15" Cabinetry Bump Out Kit	JX15BUMP
DISHWASHERS	
Dishwasher Third Rack Accessory Kit	GPF3RACK
Dishwasher Tray	WX7X5
6' Universal Dishwasher Installation Kit	PM28X329
6' Universal Dishwasher Connector Kit with Adapter	WX28X326
12' Universal Dishwasher Connector Kit with Adapter	WX28X327
Universal 7'9" 3-Prong Power Cord for Built-In Dishwashers	WX09X70911
Universal 5'4" 3-Prong Power Cord for Built-In Dishwashers	WX09X70910
10' Small Port Drain Hose/10' Universal Connector Kit	WX28X320
10' Small Port Drain Hose/10' Universal Connector Kit	WX28X321
12' Dishwasher Drain Hose Extension	WD24X10065
White Upper Dishwasher Rack Roller Kit 4-pack	WD35X20994
White Upper Dishwasher Rack Roller Kit 4-pack	WD35X21035
White Lower Dishwasher Rack Roller Kit 8-pack	WD35X21038
Gray Upper Dishwasher Rack Roller Kit 4-pack	WD35X21036
Gray Upper Dishwasher Rack Roller Kit 4-pack	WD35X21039
Gray Lower Dishwasher Rack Roller Kit 8-pack	WD35X21041
Dishwasher Garden Hose Elbow	WX28X329
Finish® Jet-Dry® Rinse Aid	WX10X10210
Finish Detergent Booster	WX10X10022
Finish Dishwasher Cleaner	WX10X10209
COMPACTORS/DISPOSERS	
Universal Compactor Bags 15-count	WX60X1
Heavy-duty Compactor Bags 12-count	WC60X5017
Cerama Bryte Disposer Cleaner	WX10X311
Splash Guard	WC03X10010
Stopper	WC11X10003
Universal Disposer Power Cord Kit	WC12X10002
3-Bolt-Mount Adapter Kit	PM3X214
Door Toe Kick	WC17X10019
	WC17X20082
Adjustable Door Kick Panel	WC17X10011

CLOTHES CARE	
Universal 6' Stainless Steel Washer Hose with 90° Elbow, 2-Pack	WX14X10011
Universal 4' Polymer Coated Washer Hose, 2-Pack	WX14X10005
Universal 4' Rubber Washer Hose, 2-Pack	WH41X10207
GE Appliances' Exclusive Universal Flexible Metal Transition Dryer Duct (installer version)	WX08X10086
Universal Steam Dryer Kit	PM14X10012
Universal Flexible Dryer Duct	PM8X73
Universal 4' Gas Dryer Connection Kit w/Auto Shut Off	PM15X114
Universal 5' Gas Dryer Connection Kit w/Auto Shut Off	PM15X118
Universal 4-Wire 4' 30-AMP	WX09X10018
Universal 4-Wire 5' 30-AMP	WX09X10019
Universal 4-Wire 6' 30-AMP Electrical Dryer Cord	WX09X10020
Universal 3-Wire 4' 30-AMP	WX09X10002
Universal 3-Wire 5' 30-AMP	WX09X10003
Universal 3-Wire 6' 30-AMP	WX09X10004
Universal Low-Profile Washer Floor Tray	PM7X2 (White)
	PM7X3 (Gray)
Universal Anti-Vibration Pads	WX17X10001CA
Cerama Bryte Washer Cleaner	WX10X312
Universal Wool Dryer Balls - 3PK	WX02X30937
Dryer Racks	WE1M1038
	WE01X20677
Universal Side Vent Dryer Kit**	WE16X229317
Wall Mount Kit	WE49X22415
Universal Dryer Steam Kit with Brass "Y"	WE16X229317
Gas Dryer LP Conversion Kit 24"	WE25M73
Gas Dryer LP Conversion Kit 27"	WE25X217
	WE250474
Washing Machine Drain Hose Extension Kit	WH49X301
Washing Machine Drain Hose Extension Kit	WH49X315
Washing Machine Drain Hose Extension Kit	WH49X316
Washing Machine Drain Hose Extension Kit	WH49X317
Dryer Natural Gas to LP Converter Kit	WE25X10032
GE Stack Rack	DSDR24F
GE Washer/Dryer Stack Bracket Kit	WE25X10028 same as GFA28KITN
	WE49X22415
GE Washer/Dryer 24" Stack Bracket Kit	WE25X10031 same as GE24STACK
GE Washer/Dryer 24" Stack Bracket Kit	GFA24KITL
7" Rightheight Riser	GFRO728
WATER SYSTEMS	
Aluminum Anode Rod (GE30S08BAM; GE30S10BLM; GE30/40L08BAM)	GEKAA24
Aluminum Anode Rod (GE30T08BAM; GE30T10BLM; GE40S08/10BAM; GE40/50S10BLM; GE50S08/10BAM)	GEKAA39
Aluminum Anode Rod (GE40T08/10BAM; GE40/50T10BLM; GE50T08/10BAM)	GEKAA50
Pitched Roof Mounting Rails (GT25C10BAM)	GT25CKR
Hardware for GT25CKR	GT25CKHL
Pitched Roof Mounting Rails (GT50/GT40C10BAM)	GT50CKR
Hardware for GT50CKR	GT50CKHL
Pitched Roof Mounting Kit	GT00CKM01
30° angle, Flat Roof Mounting Kit (GT25C10BAM)	GT25CKM30
45° angle, Flat Roof Mounting Kit (GT25C10BAM)	GT25CKM45
30° angle, Flat Roof Mounting Kit (GT40C10BAM)	GT40CKM30
45° angle, Flat Roof Mounting Kit (GT40C10BAM)	GT40CKM45
30° angle, Flat Roof Mounting Kit (GT50C10BAM)	GT50CKM30
45° angle, Flat Roof Mounting Kit (GT50C10BAM)	GT50CKM45
Temperature Sensor Sleeve	GT00CKSL
Protective Cover (GT25C10BAM)	GT25CKC
Protective Cover (GT40C10BAM)	GT40CKC
Protective Cover (GT50C10BAM)	GT50CKC
Filtered Water Faucet	UNFCTFBL
Replacement O-Rings with Lubricant	UCRING
Universal Carbon Filter Wrench	UCWRNCH
Replacement O-Ring with Lubricant	HHRING
Universal Sump Wrench	HHWRNCH

\*IM4LED is available only through ADC network.  
Must be purchased using a dealer appliance account.  
\*\*New part number in 2020  
Citrushine is a trademark of Bryson Industries, Inc. Cerama Bryte is a registered trademark of Cerama Bryte, Inc.

**WARRANTY INFORMATION**  
All parts and accessories have a limited one-year warranty, with the exception of water filters, which have a 30-day warranty.  
**LIMITED ONE-YEAR WARRANTY**  
If your GE part fails because of a manufacturing defect within one year from the date of original purchase, we will provide a new or, at our option, rebuilt part without charge. Return the defective part to the vendor from whom it was purchased with a copy of the "proof of purchase." If the part is defective and shows no signs of abuse, it will be exchanged.

This warranty does not cover the failure of parts which are damaged while in your possession, are abused, or have been installed improperly. It does not cover the cost of returning the part to the vendor from whom it was purchased nor does it cover the cost of labor to remove or install it to diagnose the fault. It does not cover parts used in products in commercial use except in the case of air conditioning equipment. In no event shall GE Appliances be liable for consequential damage.

**EXCLUSION OF IMPLIED WARRANTIES:**  
Your sole and exclusive remedy is part exchange as provided in this Limited Warranty. Any implied warranties, including the implied warranties of merchantability or fitness for a particular purpose, are limited to one year or the shortest period allowed by law.  
**Warrantor:** GE Appliances





This is  
Smarter Cleaning.



good things, for life.



GE APPLIANCES

GE is a trademark of the General Electric Company. Manufactured under trademark license.

GE Appliances has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.



Appliance Park  
Louisville, KY 40225  
geappliances.com  
Pub. No. 1-G0300 PC95981

